


### zQSFP+/QSFP28

TE Internal #: 2227671-3 zQSFP+, Cage Assembly with Integrated Connector, .032in [.8mm] Centerline, Signal, Operating Temperature Range -55 - 105 °C [-67 - 221 °F]

### View on TE.com >

Connectors > Pluggable IO Connectors & Cages

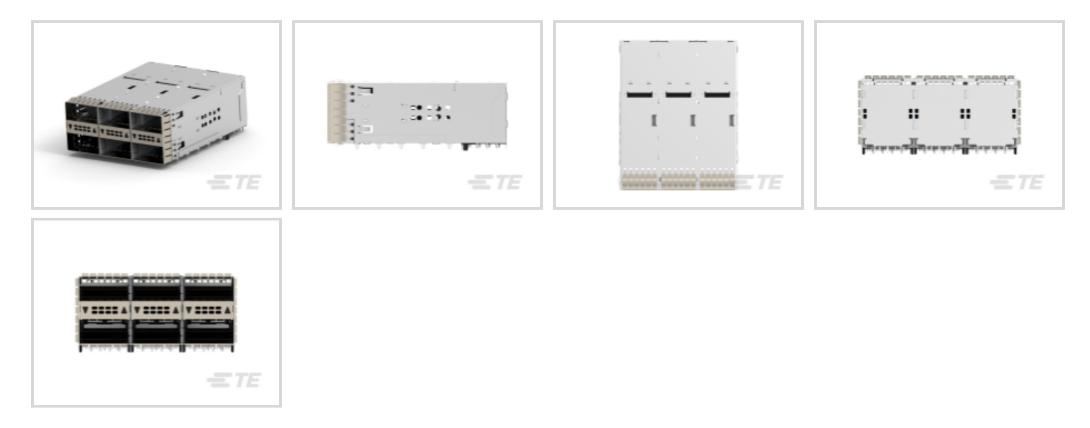

Pluggable I/O Product Type: Cage Assembly with Integrated Connector

Centerline (Pitch): .8 mm [.032 in ]

Sealable: No

Circuit Application: Signal

Operating Temperature Range: -55 - 105 °C [ -67 - 221 °F ]

## Features

**E** 

## Product Type Features

Cage Туре	Stacked
Pluggable I/O Product Type	Cage Assembly with Integrated Connector
Sealable	No
Form Factor	zQSFP+
Configuration Features	
Number of Rear EONs per Port Column	3
Number of Positions	228
Number of Ports	6
Port Matrix Configuration	2 x 3
Electrical Characteristics	
Data Rate (Max)	28 Gb/s
Contact Features	
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Contact Mating Area Plating Material	Gold

zQSFP+, Cage Assembly with Integrated Connector, .032in [.8mm] Centerline, Signal, Operating Temperature Range -55 - 105 °C [-67 - 221 °F]



Contact Underplating Material	Tin
PCB Contact Termination Area Plating Material	Gold
Contact Current Rating (Max)	.5 A
Termination Features	
Termination Post & Tail Length	2 mm[.079 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Housing Features	
Cage Material	Nickel Silver
Centerline (Pitch)	.8 mm[.032 in]
Dimensions	
PCB Thickness (Recommended)	1.57 mm[.062 in]
Usage Conditions	
Operating Temperature Range	-55 - 105 °C[-67 - 221 °F]
Operation/Application	
Pluggable I/O Applications	SFP+ Stacked Belly-to-Belly
Heat Sink Compatible	No
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box & Tray
Other	
Included Lightpipe	Yes
EMI Containment Feature Type	Internal/External EMI Springs
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240)

zQSFP+, Cage Assembly with Integrated Connector, .032in [.8mm] Centerline, Signal, Operating Temperature Range -55 - 105 °C [-67 - 221 °F]



Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC

Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free

Halogen Content

Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach


# **Compatible Parts**








# Also in the Series | zQSFP+/QSFP28

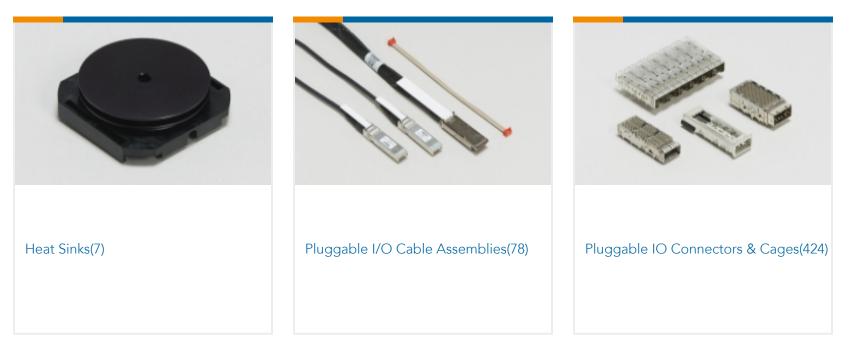

**Customers Also Bought** 

zQSFP+, Cage Assembly with Integrated Connector, .032in [.8mm] Centerline, Signal, Operating Temperature Range -55 - 105 °C [-67 - 221 °F]



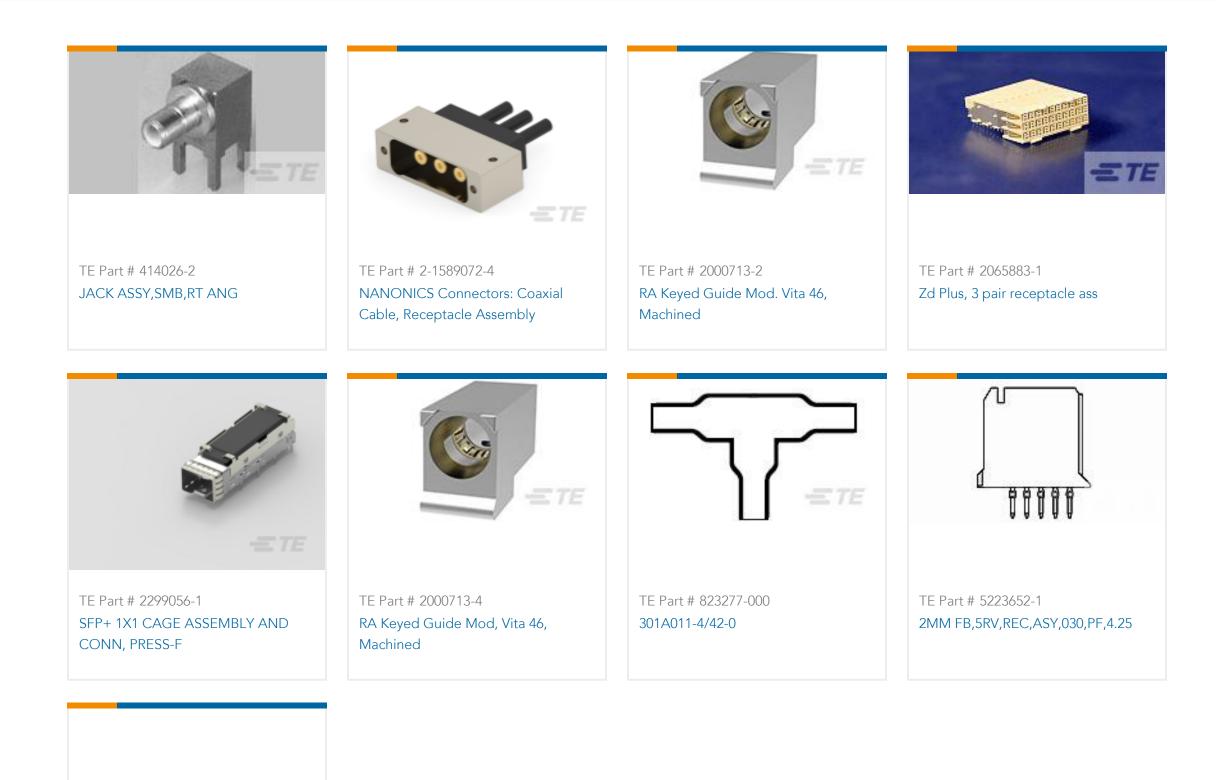

TE Part # 1-2198230-4 SFP+ Enhanced 1x2, Networking Heatsink

## Documents

Product Drawings zQSFP+ STACKED RECEPTACLE ASSEMBLY 2X3

English

**CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2227671-3\_A.2d\_dxf.zip

English

Customer View Model ENG\_CVM\_CVM\_2227671-3\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2227671-3\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

Datasheets & Catalog Pages

**C** For support call +1 800 522 6752

zQSFP+, Cage Assembly with Integrated Connector, .032in [.8mm] Centerline, Signal, Operating Temperature Range -55 - 105 °C [-67 - 221 °F]



QSFP28/56 and zQSFP+ Interconnects

English

Product Specifications Application Specification

English