




















- 1 
- 2 
- 3 
- 4 
- 5 
- 6 
- 7 
- 8 
- 9 
- 10 
- 11 
- 12 
- 13 
- 14 
- 15 
- 16 
- 17 
- 18 
- 19 

MATERIAL

Glass-fibre reinforced polyamide based (PA) technopolymer, black colour, matte finish.

PACKING RING

NBR synthetic rubber.

FLAT DIPSTICK

Flat section phosphatised steel.

On request and for sufficient quantities dipstick can be supplied in different lengths and/or complete with MAX-MIN level lines.

STANDARD EXECUTIONS

- TCD+a: without side hole.
- TCDF+a: with side breather hole.

MAXIMUM CONTINUOUS WORKING TEMPERATURE

100°C.

GRAPHIC SYMBOL "FILL"

According to DIN regulations.

TECHNICAL DATA


The tightening torque indicated in the table guarantees an optimal tightness, keeping the packing ring in the correct position.

ACCESSORIES ON REQUEST

TCD+a oil fill plugs are suitable for mounting aluminium plates with graphic symbols MH. (see page 1146).



ELESA Original design

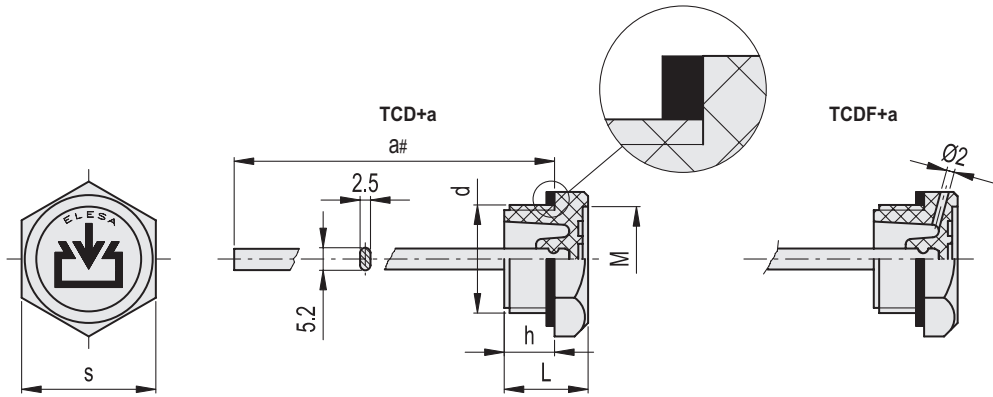

TCD+a

METRIC

METRIC

Code	Description	s	d	a#	h	L	M	Tightening torque [Nm]	⚖️
59557	TCDF.16x1.5+a	22	M16x1.5	120	9	16	17	8+10	19
59559	TCDF.18x1.5+a	26	M18x1.5	195	11	18	20.5	8+10	30
59561	TCDF.20x1.5+a	26	M20x1.5	195	11	18	20.5	8+10	30
59563	TCDF.22x1.5+a	32	M22x1.5	195	12	20	25	10+12	35
59565	TCDF.25x1.5+a	32	M25x1.5	195	12	20	25	10+12	39
59567	TCDF.26x1.5+a	32	M26x1.5	195	12	20	25	10+12	41
59569	TCDF.35x1.5+a	38	M35x1.5	195	13	22	31	15+18	40
59573	TCDF.40x1.5+a	46	M40x1.5	195	14	24	38	15+18	50

BSP

METRIC

59585	TCDF.3/8+a	22	G 3/8	120	9	16	17	8+10	20
59587	TCDF.1/2+a	26	G 1/2	195	11	18	20.5	8+10	35
59589	TCDF.3/4+a	32	G 3/4	195	12	20	25	10+12	8
59591	TCDF.1+a	38	G 1	195	13	22	31	12+15	42
59595	TCDF.1¼+a	46	G 1 1/4	195	14	24	38	15+18	52
59597	TCDF.1½+a	55	G 1 1/2	195	15	26	46	15+18	77

TCDF+a

METRIC

METRIC

Code	Description	s	d	a#	h	L	M	Tightening torque [Nm]	⚖️
59557	TCDF.16x1.5+a	22	M16x1.5	120	9	16	17	8+10	19
59559	TCDF.18x1.5+a	26	M18x1.5	195	11	18	20.5	8+10	30
59561	TCDF.20x1.5+a	26	M20x1.5	195	11	18	20.5	8+10	30
59563	TCDF.22x1.5+a	32	M22x1.5	195	12	20	25	10+12	35
59565	TCDF.25x1.5+a	32	M25x1.5	195	12	20	25	10+12	39
59567	TCDF.26x1.5+a	32	M26x1.5	195	12	20	25	10+12	41
59569	TCDF.35x1.5+a	38	M35x1.5	195	13	22	31	15+18	40
59573	TCDF.40x1.5+a	46	M40x1.5	195	14	24	38	15+18	50

BSP

METRIC

59585	TCDF.3/8+a	22	G 3/8	120	9	16	17	8+10	20
59587	TCDF.1/2+a	26	G 1/2	195	11	18	20.5	8+10	35
59589	TCDF.3/4+a	32	G 3/4	195	12	20	25	10+12	8
59591	TCDF.1+a	38	G 1	195	13	22	31	12+15	42
59595	TCDF.1¼+a	46	G 1 1/4	195	14	24	38	15+18	52
59597	TCDF.1½+a	55	G 1 1/2	195	15	26	46	15+18	77

You can choose lengths other than the standard option and/or add MAX-MIN level markings. To request customization, select an item and follow the wizard on the web.