



Surge Protection Devices

The Hatch LSP4-UNV surge protection device provides single phase protection for line/neutral, line/ground, and neutral/ground. The LSP4-UNV offers protection for LED luminaires in a small and convenient flat form factor. The surge protector is a **Type 5 SPD** suitable for field or factory installation and is designed to be wired in parallel. The LSP4-UNV also protects Electronic Fluorescent and HID ballasts as well as all other electronic products. The LSP4-UNV is designed to meet the following testing requirements:

| Standard | Category |
|--------------------|---|
| ANSI C136.2-2018 | Enhanced Test Level |
| IEEE C62.41.2-2002 | Cat. C High Exposure (10kV, 1.2/50µS & 10kA, 8/20µs) |
| ANSI C82.77-5-2017 | Cat. C Medium Exposure Level (10kV, 1.2/50µs & 5kA, 8/20µs) |

SURGE PROTECTION DEVICE LSP4-UNV



Field or Factory Installable

SPECIFICATIONS

| | | | |
|---------------------------------|--|------|------|
| Input Voltage | 120-277V (+/- 5%) | | |
| Frequency | 50Hz-60Hz | | |
| Maximum Continuous Voltage | 320V | | |
| Maximum Discharge Current | L-N 20kA; L-G, N-G 10kA (8/20µs standard wave) | | |
| Nominal Discharge Current | 5kA | | |
| Measured Limiting Voltage (VpK) | L-N | L-G | N-G |
| | 1200 | 1320 | 1320 |
| Max Case Temperature | 85°C | | |


Pulse Rating (8 x 20 µSec)

| Surge Level | # of Strikes | |
|-------------|--------------|----------|
| | L-N | L-G, N-G |
| 10,000A | *2 | 1 |
| 6,500A | 4 | 2 |
| 5,000A | 30 | 15 |
| 2,000A | 200 | 100 |
| 700A | 2,000 | 1,000 |


*1 strike at 20,000A

MECHANICAL DIMENSIONS [MM]

* Reference Dimensions Only

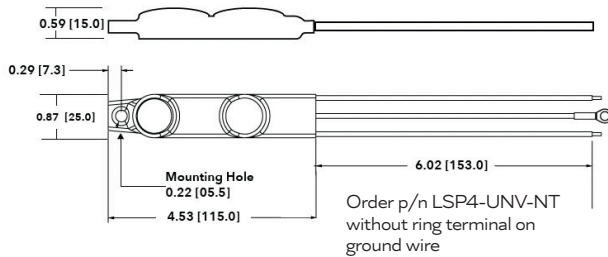

WIRING DIAGRAM

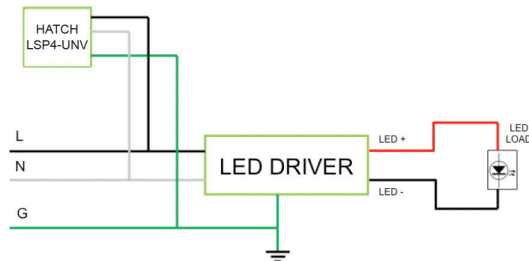

Specifications are subject to change without notice.

The LSP4 series of surge protection devices are UL type 5 devices and are designed accordingly to meet UL1449 standard. LSP4 surge protection devices are intended to be used in combination with properly rated overcurrent protection and in accordance with the intended application.



DIMENSIONS [MM]

| | |
|---------------|--------------|
| Length | 4.53 [115.0] |
| Mounting Hole | 0.22 [5.5] |
| Width | 0.87 [25.0] |
| Height | 0.59 [15.0] |

WIRING INFORMATION

| | |
|-----------------------|---|
| Surge Protector Wires | 6", Black (L), White (N), Green (G) #14 AWG |
|-----------------------|---|

PACKAGING INFORMATION

| | |
|----------|--------------|
| Weight | 2.00oz |
| Quantity | 100pc/carton |

APPROVALS



WARRANTY

- 5 year limited warranty