

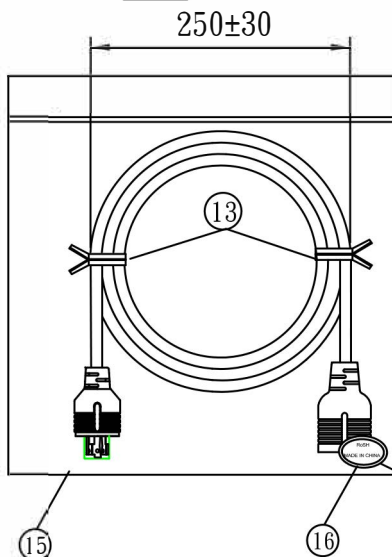

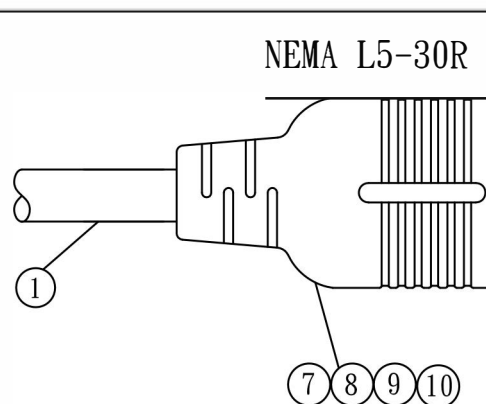


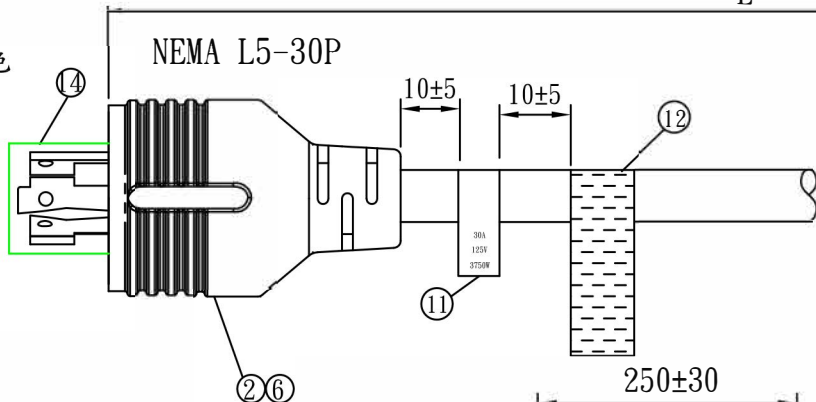

"L"



L1	L2	L3	L4	L5
(3') 915±35	(6') 1830±50	(10') 3050±50	(15') 4575±80	(25') 7620±80

序號	品名規格	用量	備注
1	SJT 10/3C 105°C 黑色	1PC	
2	YP-55 35P黑色膠料	32g/PC	
3	"N"銅片:95659	1PC	
4	"E"接地線:95658	1PC	
5	"L"銅片:95657	1PC	
6	YP-55內模	1PC	
7	YC-55 PVC 膠料:35P 黑色	30g/PC	
8	L,N極端子:95757BS-0	2PCS	
9	地線端子:95758BS-0	1PCS	
10	YC-55 內模 白色	1PC	
11	UL標籤: 30A 125V	1PC	鐳射標籤(UL)
12	警告標籤: 230*36mm	1PC	Label-205
13	迷你帶:L=200MM 黑色	2PCS	
14	YP-55護套 白色	1PC	
15	環保夾鏈袋:430X360X0.06mm	1PC	
16	ROHS標籤 客供	1PC	

核准:		審核:		業務:						
一般寸法公差: >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle:±1°	制圖	周淑萍		日期	19.07.02	客 戶				
	型號	PWCD-L530PL530R-30A-XXF-BLK				客戶料號				
	圖號				版本	B	材 質	P. V. C	單位	mm
							單重(g)			