



Relays & Contactors > Relays > Power Relays



Power Relay Type: **Industrial Panel Plug-In**

Coil Magnetic System: **Monostable, AC**

Coil Power Rating Class: **[2 – 3 VA]**

Coil Power Rating AC: **2.9 VA**

Coil Resistance: **1700 Ω**

Features

Product Type Features

Power Relay Type	Industrial Panel Plug-In
Relay Connection Type	Terminals
Terminal Configuration	Quick Connect Terminals

Electrical Characteristics

Insulation Initial Dielectric Between Coil & Contact Class	3500 – 4000 V
Insulation Initial Dielectric Between Contacts & Coil	3750 Vrms
Actuating System	AC
Insulation Initial Dielectric Between Open Contacts	1200 Vrms
Contact Limiting Making Current	30 A
Contact Limiting Short-Time Current	30 A
Contact Limiting Continuous Current	30 A
Insulation Initial Dielectric Between Adjacent Contacts	3750 Vrms
Insulation Initial Resistance	100 MΩ
Contact Limiting Breaking Current	30 A
Coil Magnetic System	Monostable, AC
	2 – 3 VA
Coil Power Rating AC	2.9 VA
Coil Resistance	1700 Ω
Coil Special Features	UL Coil Insulation Class B



Coil Voltage Rating	120 VAC
Contact Switching Load (Min)	300mA @ 12V
Contact Voltage Rating	240 VAC

Body Features

Product Weight	92 g[3.245 oz]
----------------	----------------

Contact Features

Contact Arrangement	1 Form C (CO)
Contact Current Class	16 A
Contact Current Rating (Max)	30 A
Contact Material	AgCdO
Contact Number of Poles	1

Mechanical Attachment

Product Mounting Feature Type	Flange with Mounting Slots
Product Mount Type	Panel

Dimensions

Length Class (Mechanical)	40 – 50 mm
Height Class (Mechanical)	30 – 40 mm
Width Class (Mechanical)	30 – 40 mm
Product Width	38.89 mm[1.53 in]
Product Length	73.66 mm[2.9 in]
Product Height	35.71 mm[1.4 in]

Usage Conditions

Environmental Ambient Temperature Class	0 – 50 °C
Environmental Ambient Temperature (Max)	45 °C[113 °F]
Operating Temperature Range	-45 – 45 °C

Packaging Features

Packaging Method	Package
------------------	---------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant




China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2023 (233) SVHC > Threshold: Cadmium oxide (10% in Component) Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 8-1393114-1
KUHP-5AT1-120=KU



TE Part # 8-1393114-3
KUHP-5A17-120=KU

Also in the Series | [Potter & Brumfield KUHP](#)



Power Relays(31)


Customers Also Bought




TE Part #DTP06-4S
DEUTSCH DTP Housings



TE Part #7-1393114-7
KUHP-11D51-12=KU

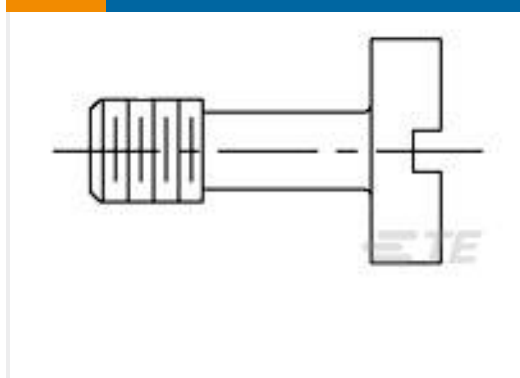

TE Part #5554726-1
SCREW,PAN HD, CPTV,SHLD CHAMP

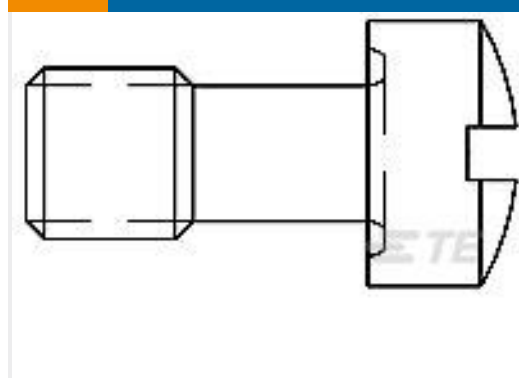

TE Part #5746879-1
HDF FILLISTER HEAD SCREW



TE Part #4-1393122-0
KHAU-17A18-240=KH



TE Part #WP-4S
WEDGE LOCK, 4P, PLG, ORG, DTP



TE Part #633602-000
CRSM-53/13-200



TE Part #DT2P-BT
BOOT, 2P, REC, ST, GRY



TE Part #M3031-000005-250PG
PRESS XDCR M3031-000005-250PG

Documents

CAD Files

Customer View Model

[ENG_CVM_8-1393114-4_0303.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_8-1393114-4_0303.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_8-1393114-4_0303.2d_dxf.zip](#)



English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

KU Sockets & Accessories

English

KUHP 30 Amp Power Relays

English

Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

UL

English