

R10-E2W2-V185 ✓ ACTIVE

Potter & Brumfield | Potter & Brumfield R10

TE Internal #: 1393767-7

Power Relays, Industrial Panel Plug-In, Monostable, DC, 900 mW
Coil Power Rating DC, 185 Ω Coil Resistance, Sensitive Version,
Potter & Brumfield R10

[View on TE.com >](#)



Relays & Contactors > Relays > Power Relays



Relay Type: **Industrial Panel Plug-In**

Coil Magnetic System: **Monostable, DC**

Coil Power Rating DC: **900 mW**

Coil Resistance: **185 Ω**

Coil Special Features: **Sensitive Version**

Features

Product Type Features

Relay Type	Industrial Panel Plug-In
------------	--------------------------

Electrical Characteristics

Insulation Initial Dielectric Between Coil & Contact Class	500 – 1000 V
Insulation Initial Dielectric Between Contacts & Coil	1000 Vrms
Actuating System	DC
Insulation Initial Dielectric Between Open Contacts	500 Vrms
Contact Limiting Making Current	7.5 A
Contact Limiting Short-Time Current	7.5 A
Contact Limiting Continuous Current	7.5 A
Coil Power Rating Class	800 – 1000 mW
Insulation Initial Dielectric Between Adjacent Contacts	1000 Vrms
Insulation Initial Resistance	10000 M Ω
Contact Limiting Breaking Current	7.5 A
Coil Magnetic System	Monostable, DC
Coil Power Rating DC	900 mW
Coil Resistance	185 Ω
Coil Special Features	Sensitive Version
Coil Voltage Rating	12 VDC



Contact Switching Load (Min)	300mA @ 12V
------------------------------	-------------

Contact Voltage Rating	120 VAC
------------------------	---------

Body Features

Product Weight	40 g[1.41 oz]
----------------	---------------

Contact Features

Contact Special Features	Single Contact
--------------------------	----------------

Contact Arrangement	2 Form C (CO)
---------------------	---------------

Contact Current Class	16 A
-----------------------	------

Contact Current Rating	7.5 A
------------------------	-------

Contact Material	AgCdO
------------------	-------

Contact Number of Poles	2
-------------------------	---

Termination Features

Relay Connection Type	PCB Termination
-----------------------	-----------------

Terminal Configuration	Solder Pins
------------------------	-------------

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Dimensions

Length Class (Mechanical)	20 – 25 mm
---------------------------	------------

Height Class (Mechanical)	30 – 40 mm
---------------------------	------------

Width Class (Mechanical)	16 – 20 mm
--------------------------	------------

Product Width	18.66 mm[.734 in]
---------------	-------------------

Product Length	24.13 mm[.95 in]
----------------	------------------

Product Height	29.97 mm[1.17 in]
----------------	-------------------

Usage Conditions

Environmental Ambient Temperature Class	70 – 85 °C
---	------------

Environmental Ambient Temperature (Max)	75 °C[167 °F]
---	---------------

Operating Temperature Range	-55 – 75 °C
-----------------------------	-------------

Packaging Features

Packaging Method	Package
------------------	---------

Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com)>



EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	<p>Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2023 (233) SVHC > Threshold: Cadmium oxide (7.95% in Component Part)</p> <p>Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</p>
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



Also in the Series | [Potter & Brumfield R10](#)



PCB Headers & Receptacles(1)

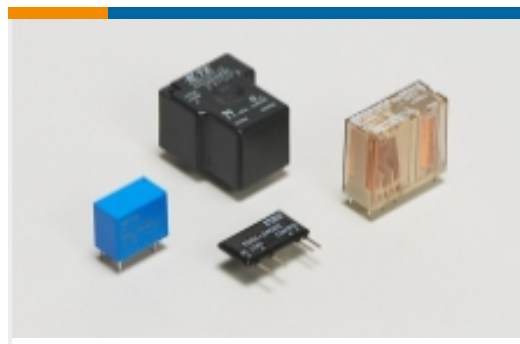

Power Relays(135)



Relay Accessories, Sockets & Clips(30)

Customers Also Bought



TE Part #2-1622824-8
RL73H 3A R27 1% 4K RL



TE Part #103670-1
02 MTE HDR SRST LATCH W/HLDWN



TE Part #2-1445087-2
MICRO MNL HDR ASSY S/ROW AU LF



TE Part #5-2176362-3
RQ 0402 140R 0.1% 10PPM 5K RL




TE Part #2-747704-0
25 PLUG SP/FMS BRDLK



TE Part #1SNA114836R0000
BAMH



TE Part #770743-1
10P MINI UMNL HDR ASSY D/R VRT

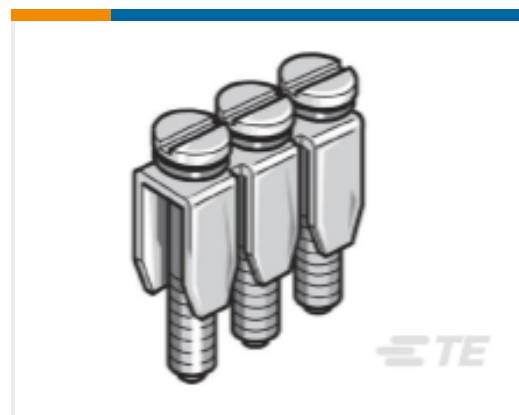

TE Part #1SNA173520R2200
BJM6D-10

Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1393767-7_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1393767-7_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1393767-7_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[R10 General Purpose Dry Circuit to 7.5 Amp Multicontact AC or DC Relay](#)

English



Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

CSA Certificate

English