


**TRZ 24VDC 1NO HC****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

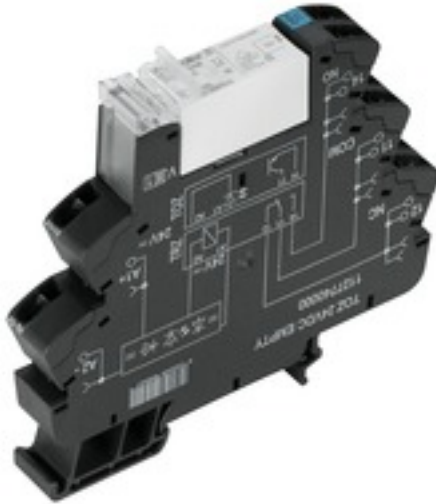**Product image**

Similar to illustration

- 1 NO contact, with high inrush power (HC)
- Contact material: AgSnO
- Especially for inductive DC loads and loads with higher inrush currents up to 80 A / 20 ms
- Unique multi-voltage input from 24 to 230 V UC

**General ordering data**

|            |  |
|------------|--|
| Version    | TERMSERIES, Relay module, Number of contacts: 1, NO contact AgSnO, Rated control voltage: 24 V DC $\pm 20\%$ , Continuous current: 16 A, Tension-clamp connection, Test button available: No |
| Order No.  | <a href="#">1479940000</a>   |
| Type       | TRZ 24VDC 1NO HC   |
| GTIN (EAN) | 4050118288230  |
| Qty.       | 10 pc(s).  |

Creation date June 6, 2024 10:53:19 AM CEST

Catalogue status 01.06.2024 / We reserve the right to make technical changes.

## TRZ 24VDC 1NO HC

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 87.8 mm | Depth (inches)  | 3.457 inch |
| Height     | 90.5 mm | Height (inches) | 3.563 inch |
| Width      | 12.8 mm | Width (inches)  | 0.504 inch |
| Net weight | 55 g    |                 |            |

### Temperatures

|                     |   |                       |                |
|---------------------|---|-----------------------|----------------|
| Storage temperature | -40 °C...85 °C  | Operating temperature | -40 °C...60 °C |
| Humidity            | 5-95% relative humidity, T <sub>u</sub><br>= 40°C, without condensation |                       |                |

### Rated data UL

|   |        |                                    |  |
|---|--------|------------------------------------|--|
| Ambient temperature (operational), max. 60 °C |        | Connection cross-section AWG, min. | AWG 26   |
| Connection cross-section AWG, max.            | AWG 14 | Type of conductor                  | rigid copper conductor,<br>flexible copper conductor |
| Pollution severity level                      | 2      |                                    |  |

### Control side

|                                       |  |  |           |
|---------------------------------------|--|--|-----------|
| Rated control voltage                 | 24 V DC ±20 %                                    | Rated current DC   | 22.0 mA   |
| Power rating                          | 530 mW   | Status indicator   | Green LED |
| Protective circuit                    | Free-wheeling diode, Reverse polarity protection | Coil voltage of the replacement relay deviating from the rated control voltage | No        |
| Coil voltage of the replacement relay | 24 V DC  |  |           |

### Load side

|   |                      |   |                                      |
|---|----------------------|---|--------------------------------------|
| Rated switching voltage                 | 250 V AC             | Continuous current                      | 16 A                                 |
| Max. switching frequency at rated load  | 0.1 Hz               | Max. switching voltage, AC              | 250 V                                |
| Max. switching voltage, DC              | 250 V                | Inrush current                          | 80 A / 20 ms                         |
| AC switching capacity (resistive), max. | 4000 VA              | DC switching capacity (resistive), max. | 384 W @ 24 V                         |
| Switch-on delay                         | ≤ 7 ms               | Switch-off delay                        | ≤ 16 ms                              |
| Contact type                            | 1 NO contact (AgSnO) | Mechanical service life                 | 5 x 10 <sup>6</sup> switching cycles |
| Min. switching power                    | 1 W                  |   |                                      |

### General data

|                                      |                           |                |  |
|--------------------------------------|---------------------------|----------------|--|
| Operating altitude                   | ≤ 2000 m, above sea level |                |  |
| Rail                                 | TS 35                     |                |  |
| Test button available                | No                        |                |  |
| Mechanical switch position indicator | No                        |                |  |
| Colour                               | black                     |                |  |
| UL94 flammability rating component   | Component                 | Housing        |  |
|                                      | UL94 flammability rating  | V-0            |  |
|                                      | Component                 | Retaining clip |  |
|                                      | UL94 flammability rating  | V-0            |  |

## TRZ 24VDC 1NO HC

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Insulation coordination

|  |                                |   |                              |
|--|--------------------------------|---|------------------------------|
| Rated voltage                                    | 300 V                          | Pollution severity  | 2                            |
| Surge voltage category                           | III                            | Clearance and creepage distances for control side - load side | ≥ 6 mm                       |
| Dielectric strength for control side - load side | 1.2 kV <sub>eff</sub> / 5 s    | Type of isolation at input and output                         | reinforced insulation        |
| Dielectric strength of open contact              | 1.2 kV <sub>eff</sub> / 1 min. | Dielectric strength to mounting rail                          | 4 kV <sub>eff</sub> / 1 Min. |
| Impulse withstand voltage                        | 6 kV (1.2/50 μs)               | Protection degree   | IP20                         |

### Further details of approvals / standards

|                       |            |                         |         |
|-----------------------|------------|-------------------------|---------|
| Certificate No. (DNV) | TAA00001E5 | Certificate no. (cULus) | E141197 |
|-----------------------|------------|-------------------------|---------|

### Connection data

|   |                          |   |                      |
|---|--------------------------|---|----------------------|
| Wire connection method  | Tension-clamp connection | Stripping length, rated connection  | 8 mm                 |
| Clamping range, rated connection  | 1.5 mm <sup>2</sup>      | Clamping range, min.  | 0.14 mm <sup>2</sup> |
| Clamping range, max.  | 2.5 mm <sup>2</sup>      | Wire connection cross section AWG, min.   | AWG 26               |
| Wire connection cross section AWG, max.   | AWG 14                   | Wire cross-section, solid, min.   | 0.14 mm <sup>2</sup> |
| Wire cross-section, solid, max.   | 2.5 mm <sup>2</sup>      | Wire cross-section, solid, min. (AWG)   | AWG 26               |
| Wire cross-section, solid, max. (AWG)   | AWG 14                   | Wire connection cross section, finely stranded, min.                                    | 0.14 mm <sup>2</sup> |
| Wire connection cross section, finely stranded, max.                                    | 2.5 mm <sup>2</sup>      | Wire cross-section, finely stranded, min. (AWG)   | AWG 26               |
| Wire cross-section, finely stranded, max. (AWG)   | AWG 14                   | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.14 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 1.5 mm <sup>2</sup>      | Conductor cross-section, flexible, AEH (DIN 46228-1), min.                              | 0.14 mm <sup>2</sup> |
| Conductor cross-section, flexible, AEH (DIN 46228-1), max.                              | 1.5 mm <sup>2</sup>      | Blade size  | 0.6 x 3.5 mm         |

### Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001437    | ETIM 7.0    | EC001437    |
| ETIM 8.0    | EC001437    | ETIM 9.0    | EC001437    |
| ECLASS 9.0  | 27-37-16-01 | ECLASS 9.1  | 27-37-16-01 |
| ECLASS 10.0 | 27-37-16-01 | ECLASS 11.0 | 27-37-16-01 |
| ECLASS 12.0 | 27-37-16-01 | ECLASS 13.0 | 27-37-16-01 |

### Environmental Product Compliance

|            |                                      |
|------------|--------------------------------------|
| REACH SVHC | Lead 7439-92-1                       |
| SCIP       | 9e2cbc49-76d9-4611-b8ec-5b4f549a0aa9 |

**Data sheet**

**TRZ 24VDC 1NO HC**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Technical data**

**Approvals**

Approvals



|                         |            |
|-------------------------|------------|
| ROHS                    | Conform    |
| UL File Number Search   | UL Website |
| Certificate no. (cULus) | E141197    |

**Downloads**

|   |  |
|---|--|
| Approval/Certificate/Document of Conformity | <a href="#">EU Konformitätserklärung / EU Declaration of Conformity</a>  |
| Engineering Data                            | <a href="#">CAD data – STEP</a>  |
| Engineering Data                            | <a href="#">Zuken E3.S</a>   |
| User Documentation                          | <a href="#">Beipackzettel / Package Insert – multilingual</a><br><a href="#">FL_TERMSERIES_RCL1NOInrush_LOAD_GUIDE</a> |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>   |
| Brochures                                   |  |


**TRZ 24VDC 1NO HC**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany


www.weidmueller.com

**Drawings**

**Wiring diagram**

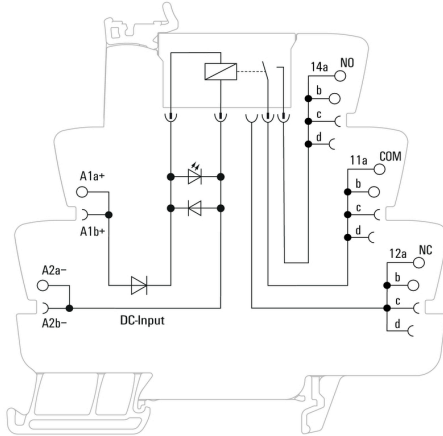

**Graph**

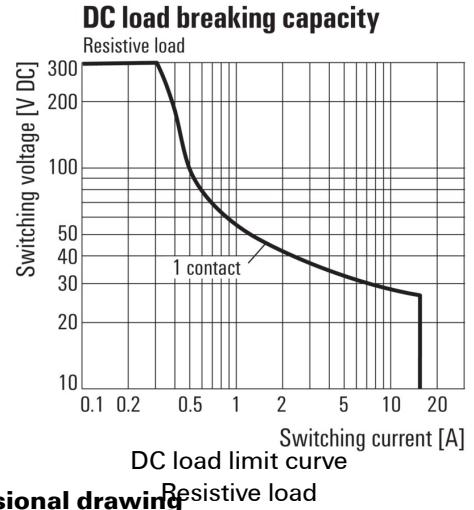

**Dimensional drawing**

