

MEAS | MEAS 86 Series TE Internal #: 86-030A-C TE Internal Description: 30 PSIA CABLE CONN MV PRESSURE SENSOR MV Output Pressure Sensor, 16 mm

View on TE.com >



Sensors > Pressure Sensors > Media Isolated Pressure Sensors > MV Output Pressure Sensor, 16 mm



Pressure: [30 psi] Pressure Sensor Type: mV Output Pressure Sensors Pressure Type: Absolute Output Signal Type: 100mV Operating Temperature Range: -40 - 125 °C [-40 - 257 °F]

All MV Output Pressure Sensor, 16 mm (28)

Features

Product Type Features

Pressure Sensor Type

Pressure Type	Absolute
Sensor Package	O-Ring Mount
Configuration Features	
Electrical Connection	6" Ribbon Cable with Connector
Electrical Characteristics	
Supply Current	1.5 mA
Dimensions	
Product Diameter	15.82 mm[.622 in]
Product Height	11.4 mm[.448 in]
Usage Conditions	
Operating Temperature Range	-40 - 125 °C[-40 - 257 °F]
Operation/Application	
Proof Pressure Range	3X
	30 psi

C For support call +1 800 522 6752

06/23/2024 12:10AM |Page 1



Output Signal Type	100mV
Other	
Non-Linearity ±	.1 %
Sensor Options	No Tube
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Methanone, (diphenylphosphinyl)(2,4,6- trimethylphenyl)- (1% in Component Part) Aticle Safe Usage Statements: Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content

Not Yet Reviewed for halogen content

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


30 PSIA CABLE CONN MV PRESSURE SENSOR







Also in the Series | MEAS 86 Series



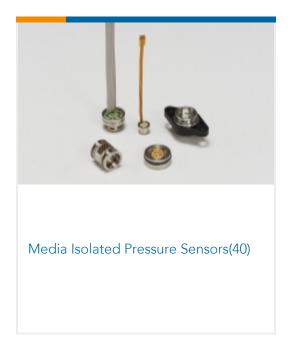

Customers Also Bought

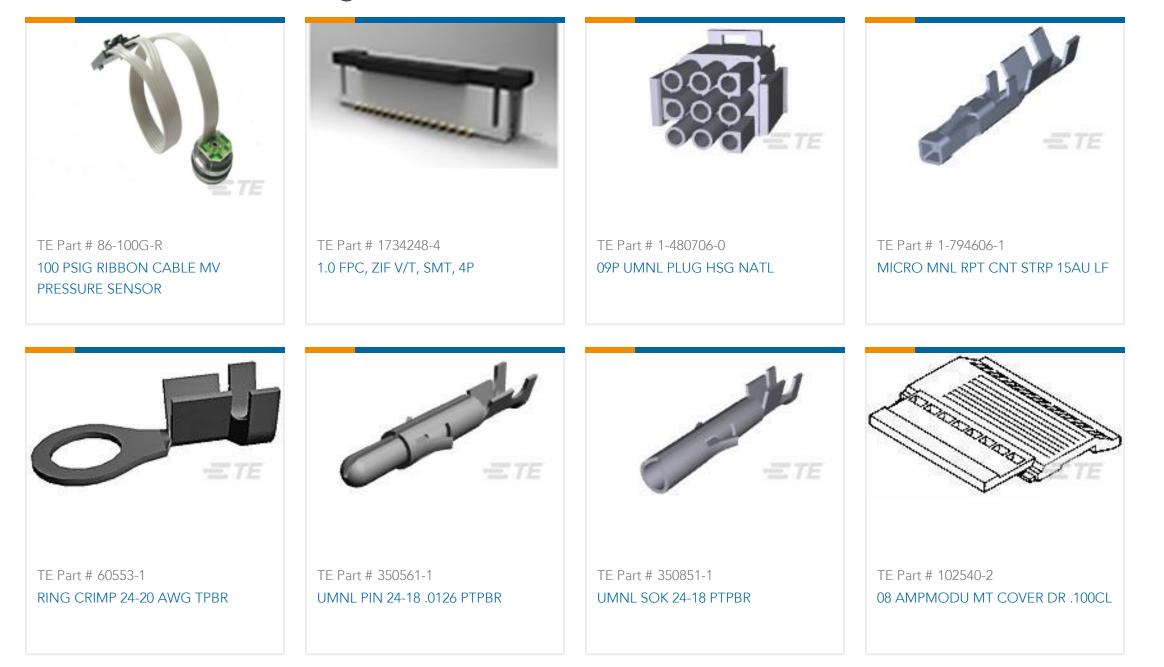

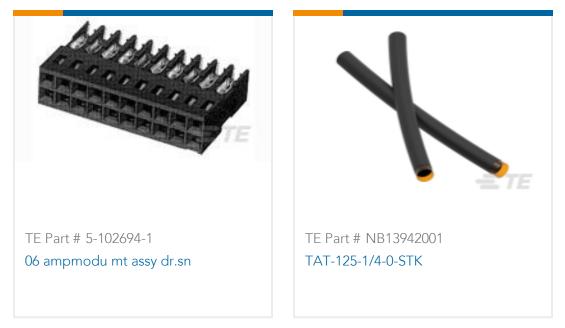

86-030A-C

30 PSIA CABLE CONN MV PRESSURE SENSOR



Documents

CAD Files 3D PDF

3D

Customer View Model

ENG_CVM_CVM_86-030A-C_G1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_86-030A-C_G1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_86-030A-C_G1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the $\ensuremath{\text{Terms}}\xspace$ and $\ensuremath{\text{Conditions}}\xspace$ of use.

Datasheets & Catalog Pages 86C

English