


Induktiver Ringsensor

-
- Technical drawing of a mechanical part, showing three views: front, top, and side. The drawing includes dimensions and labels for various features.
- Front View (Top):**
- Overall width: 20 mm
 - Overall height: 8 mm
 - Central hole diameter: $\varnothing 4.5$ (2x)
 - Small hole diameter: 1.5 mm
 - Large hole diameter: 6 mm
 - Labels: 1, 2, 3
 - Threaded hole: M12x1
 - Dimensions: 15.5, 9.5
- Top View (Middle):**
- Overall width: 35 mm
 - Overall height: 26 mm
 - Central hole diameter: $\varnothing 4.5$ (2x)
 - Small hole diameter: 1.5 mm
 - Large hole diameter: 6 mm
 - Label: 5
 - Threaded hole: M3x4 (2x)
 - Dimensions: 4.5, 13
- Side View (Bottom):**
- Overall width: 60 mm
 - Overall height: 13 mm
 - Central hole diameter: $\varnothing 4.5$ (2x)
 - Small hole diameter: 1.5 mm
 - Large hole diameter: 6 mm
 - Label: 5
 - Threaded hole: M3x4 (2x)
 - Dimensions: 15, 10, 42.5



BU: blau

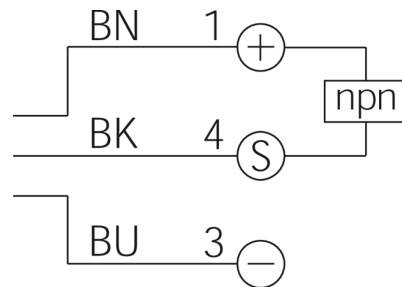

+20°C, 24 V DC

© di-soric . Änderungen vorbehalten . 17.05.2024 . Seite 1

**204521****IR 25 NSOK-IBS****Induktiver Ringsensor****Technische Daten (typ.)****+20°C, 24 V DC**

Schutzart

IP 67

Anschluss

Stecker, M12, 4-polig, A-kodiert

Anschlusskabel

VK ...

Weitere Informationen / Zubehör<https://www.di-soric.com/204521>