

SMD transformers for automotive grade  
Transformers for BMS



## VMT series



### FEATURES

- A thin type pulse transformer of SMD type high withstand voltage.
- Our proprietary structure ensures an insulating distance of 5mm or more at a height of 5mm or less.
- Possible to keep steady performance and stable supply of this products by fully automated production lines.
- Operating temperature range: .40 to +125°C (including self-temperature rise)
- The VMT45 series is integrated with a common mode choke coil.

### APPLICATION

- Lithium-ion battery voltage monitoring system for xEV

### PART NUMBER CONSTRUCTION

<b>VMT</b>	<b>40DR</b>	-	<b>201</b>	<b>S2P4</b>
Series name	Core shape		Type name	Internal code

### PRODUCT LINEUP

Part No.	Inductance*	Leakage inductance*	DC resistance		Withstanding voltage	Turn ratio
	NP ( $\mu$ H) min.	NS ( $\mu$ H)max.	NP1, NP2 ( $\Omega$ )typ.	NS1, NS2 ( $\Omega$ )typ.	NP-NS Sense:1mA	NP:NS

#### [VMT40DR-201S2P4](#)

14.8x8.8x4.2 (mm)max.



150	2	0.4	0.4	4.3kV DC /1 sec	1:1
-----	---	-----	-----	-----------------	-----

\* Measuring conditions: 100kHz/0.1V

Part No.	Inductance*	Leakage inductance*	DC resistance		Withstanding voltage	Turn ratio
	NP ( $\mu$ H) min.	NS ( $\mu$ H)max.	NC1+NP1 NC2+NP2 ( $\Omega$ )typ.	NS1, NS2 ( $\Omega$ )typ.	NP-NS Sense:1mA	NC:NP:NS

#### [VMT45DR-X01S1P4](#)

14.8x8.8x4.8 (mm)max.



100	2	0.67 0.61	0.3	4.3kV DC /1 sec	1.2:1:1
-----	---	--------------	-----	-----------------	---------

#### [VMT45DR-X02S1P4](#)

14.8x8.8x4.8 (mm)max.



150	2	0.61 0.71	0.4	4.3kV DC /1 sec	0.75:1:1
-----	---	--------------	-----	-----------------	----------

\* Measuring conditions: 100kHz/0.1V

# VMT40DR-201S2P4


## ELECTRICAL CHARACTERISTICS

### CHARACTERISTICS SPECIFICATION TABLE


Part No.	Inductance*	Leakage inductance*	DC resistance	Withstanding voltage	Turn ratio
	NP ( $\mu$ H) min.	NS ( $\mu$ H)max.	NP1, NP2 ( $\Omega$ )typ.	NP-NS Sense:1mA	NP:NS
VMT40DR-201S2P4	150	2	0.4	4.3kV DC /1 sec	1:1

\* Measuring conditions: 100kHz/0.1V


## SHAPE & DIMENSIONS

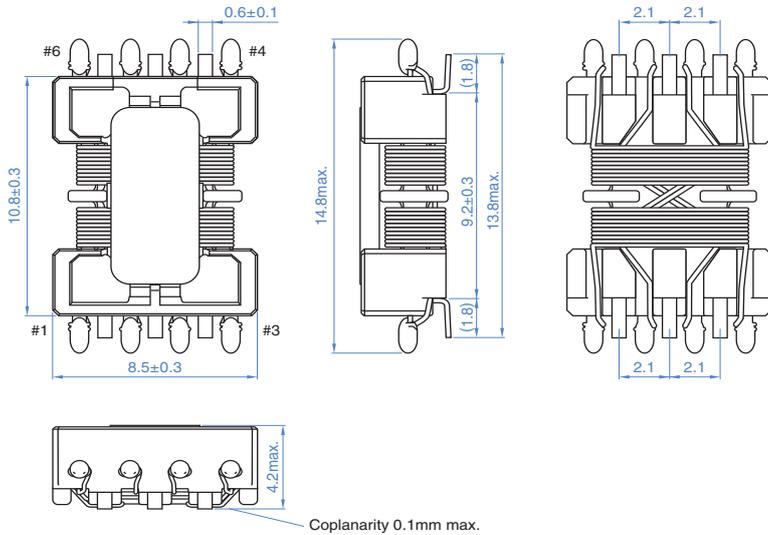

## RECOMMENDED LAND PATTERN

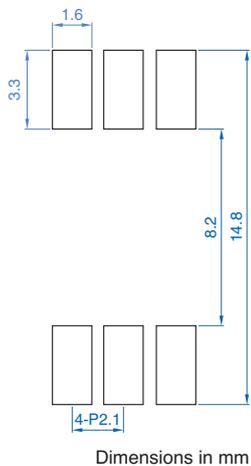

## CIRCUIT DIAGRAM

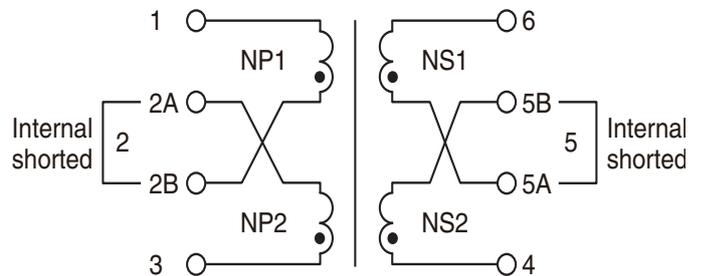

# VMT45DR-X01S1P4


## ELECTRICAL CHARACTERISTICS

### CHARACTERISTICS SPECIFICATION TABLE

Part No.	Inductance*	Leakage inductance*	DC resistance		Withstanding voltage	Turn ratio
	NP ( $\mu\text{H}$ ) min.	NS ( $\mu\text{H}$ ) max.	NC1+NP1 NC2+NP2 ( $\Omega$ ) typ.	NS1, NS2 ( $\Omega$ ) typ.	NP-NS Sense:1mA	NC:NP:NS
VMT45DR-X01S1P4	100	2	0.67 0.61	0.3	4.3kV DC /1 sec	1.2:1:1


\* Measuring conditions: 100kHz/0.1V

## SHAPE & DIMENSIONS

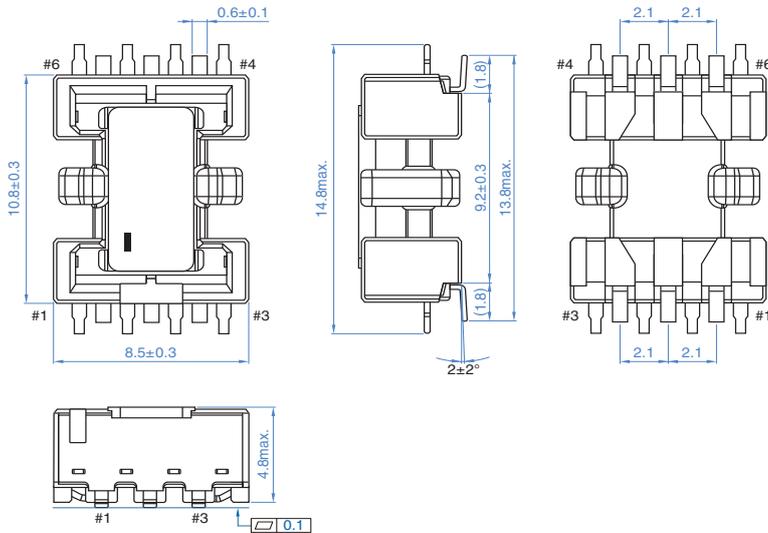


Dimensions in mm

## RECOMMENDED LAND PATTERN

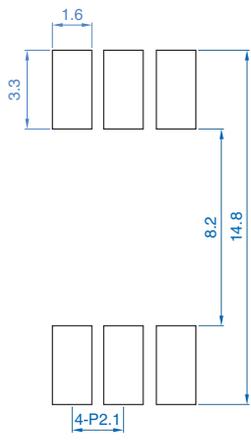

Dimensions in mm

## CIRCUIT DIAGRAM

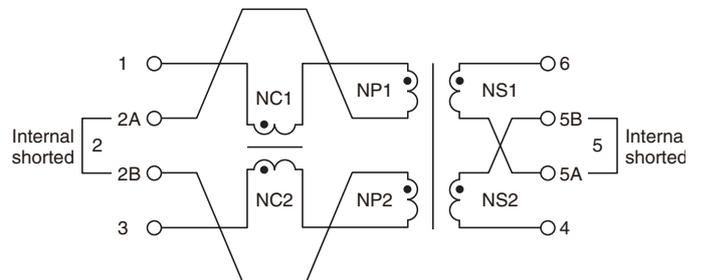

# VMT45DR-X02S1P4


## ELECTRICAL CHARACTERISTICS

### CHARACTERISTICS SPECIFICATION TABLE

Part No.	Inductance*	Leakage inductance*	DC resistance		Withstanding voltage	Turn ratio
	NP ( $\mu\text{H}$ ) min.	NS ( $\mu\text{H}$ )max.	NC1+NP1 NC2+NP2 ( $\Omega$ )typ.	NS1, NS2 ( $\Omega$ )typ.	NP-NS Sense:1mA	NC:NP:NS
VMT45DR-X02S1P4	150	2	0.61 0.71	0.4	4.3kV DC /1 sec	0.75:1:1


\* Measuring conditions: 100kHz/0.1V

## SHAPE & DIMENSIONS

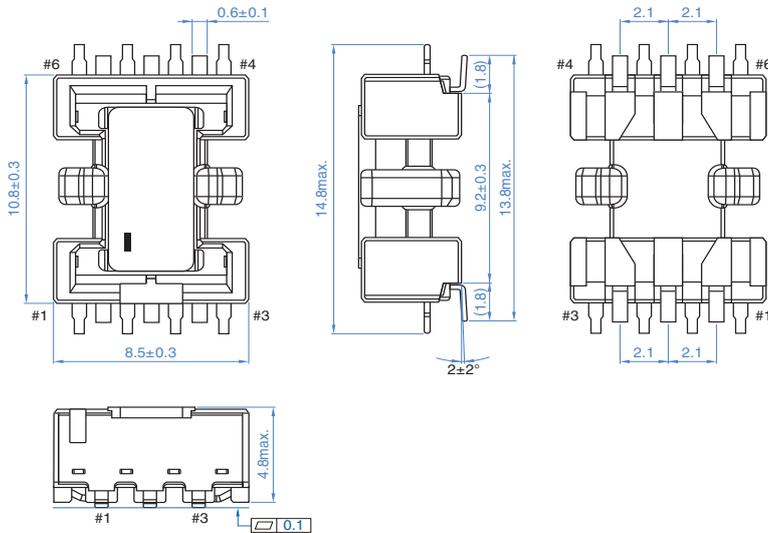


Dimensions in mm

## RECOMMENDED LAND PATTERN

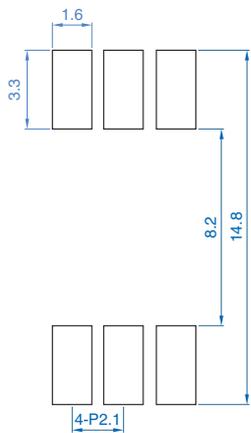


Dimensions in mm

## CIRCUIT DIAGRAM

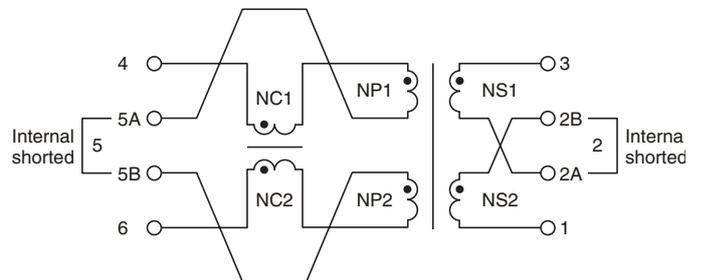

# VMT series

## RECOMMENDED REFLOW PROFILE

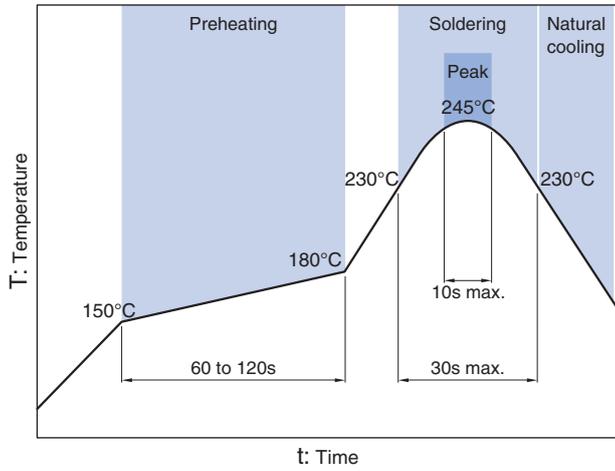

\* When mounting the product, use our recommended reflow profile described above.


## TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Part No.	Temperature range		Individual weight (g)
	Operating temperature* (°C)	Storage temperature** (°C)	
VMT40DR-201S2P4	-40 to +125	-40 to +125	0.6
VMT45DR-X01S1P4	-40 to +130	-40 to +130	0.66
VMT45DR-X02S1P4	-40 to +130	-40 to +130	0.66

\* Operating temperature range includes self-temperature rise.  
 \*\*The storage temperature range is for after the assembly.


## PACKAGING STYLE

### REEL DIMENSIONS, PACKAGE QUANTITY

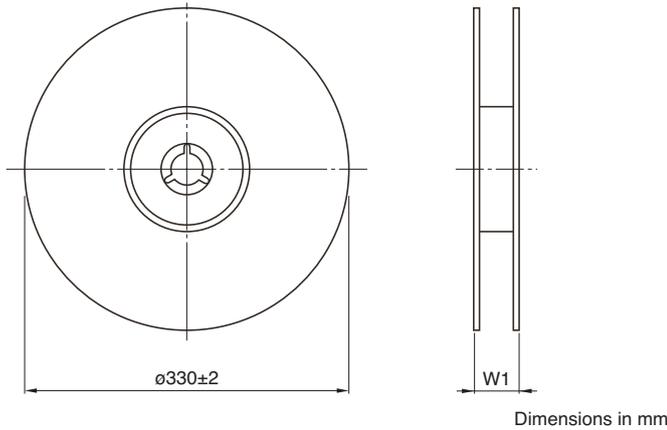

Part No.	W1	Package quantity (pcs/reel)	Package quantity (pcs/box)
VMT40DR-201S2P4	27.9	800	2400
VMT45DR-X01S1P4	27.9	600	1800
VMT45DR-X02S1P4	27.9	600	1800

### TAPE DIMENSIONS

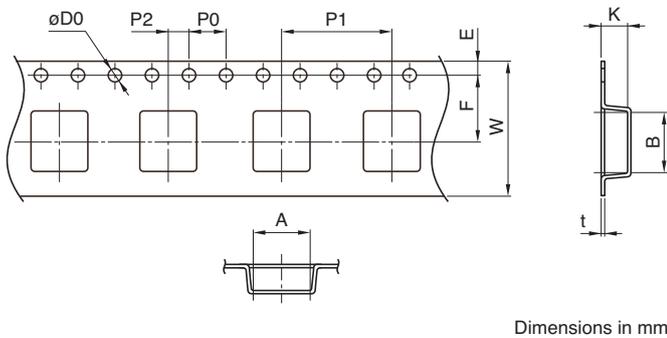

Part No.	A	B	$\phi D0$	E	F	P0	P1	P2	W	K	t
VMT40DR-201S2P4	8.8	13.3	1.5+0.1/-0	1.75±0.1	11.5±0.1	4.0±0.1	12±0.1	2±0.15	24±0.3	4.5	0.5
VMT45DR-X01S1P4	8.7	14.7	1.5+0.1/-0	1.75±0.1	11.5±0.1	4.0±0.1	16±0.1	2±0.1	24±0.3	5.45	0.5
VMT45DR-X02S1P4	8.7	14.7	1.5+0.1/-0	1.75±0.1	11.5±0.1	4.0±0.1	16±0.1	2±0.1	24±0.3	5.45	0.5

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (5/6)  
 Please note that the contents may change without any prior notice due to reasons such as upgrading.

## Attentions for use

Please read this specifications before using this product by all means.

## Attentions for safety

For use of this product, please carefully read this caution and design the application safely.

## Attention on designing

- On designing a PCB layout, please refer to the land pattern of this catalogue.
- As leakage magnetic flux generates, please pay attention to the affection by the flux.  
It may be concerned as the cause of a malfunction.

## Attention on handling

- Please do not use a product which was dropped.
- It may be concerned as the cause of a malfunction.
- Since the top of the soldered pins are sharpened, please handle with care.  
When keeping the products, please avoid any dust, mist, water and sunlight.
- It may be concerned as the cause of a malfunction.  
In the environment which is exposed by any gas corrosion, i.e. sodium, acid and alkaline atmosphere, please do not use or store.
- When assembling, do not apply excess stress to the product by metal base tool.  
It may be concerned as the cause of a malfunction.

## Attention

- This product's structure and number of turns (magnetic design) are designed by consideration of the condition of power voltage and circuit drive (drive frequency and Max. on-duty).  
Do not operate under the out of the range of the designed condition.  
It may be any causes of a damage or a burnout.
- The range of the operating temperature and humidity, by its consideration of the characteristics of component parts and its self temperature rise.  
Do not exceed this range for the operation.  
It may be any causes of damage or burnout.
- Do not use this product under the condition which is possible contamination of any dust or wrong parts.  
It may be any causes of burnout.
- The products listed in this specification are intended for use of any general electronic equipment and transportation equipment (AV equipment, telecommunication applicants, home appliances, amusement equipment, computers, mobile equipment, office machines, measurement equipment, industrial robots, cars, electric trains, ships and etc.) under a normal operation and condition.
- This is not a product which warrants any quality, compatibility or performance to the following uses (hereafter called Special cases of uses) which malfunction, error or defect in those appliances which are required high level of safeness or reliability, may cause the enormous social impact or the risk to human life, health of body, assets or else.
- About any damages which are caused by an use which is out of range or beyond the conditions of our specification, or an use in these special cases below, we are not able to take any responsibilities of the damages.
- If your purpose of this product will be an use beyond the scope or conditions of this specification, or for special cases listed below, please contact with one of our contact windows, in advance.
- In order to meet with an application of our customer, we would like to discuss its specification which will be different to this specification.

- (1) Aerospace/Aviation
- (2) Medical
- (3) Power-generation control
- (4) Nuclear power generation
- (5) Equipment on the sea bed
- (6) Transportation control

- (7) Public information-processing
- (8) Military
- (9) Electric heating, burning equipment
- (10) Disaster prevention/crime prevention equipment
- (11) Safety equipment
- (12) Other applications that are not considered as general purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.