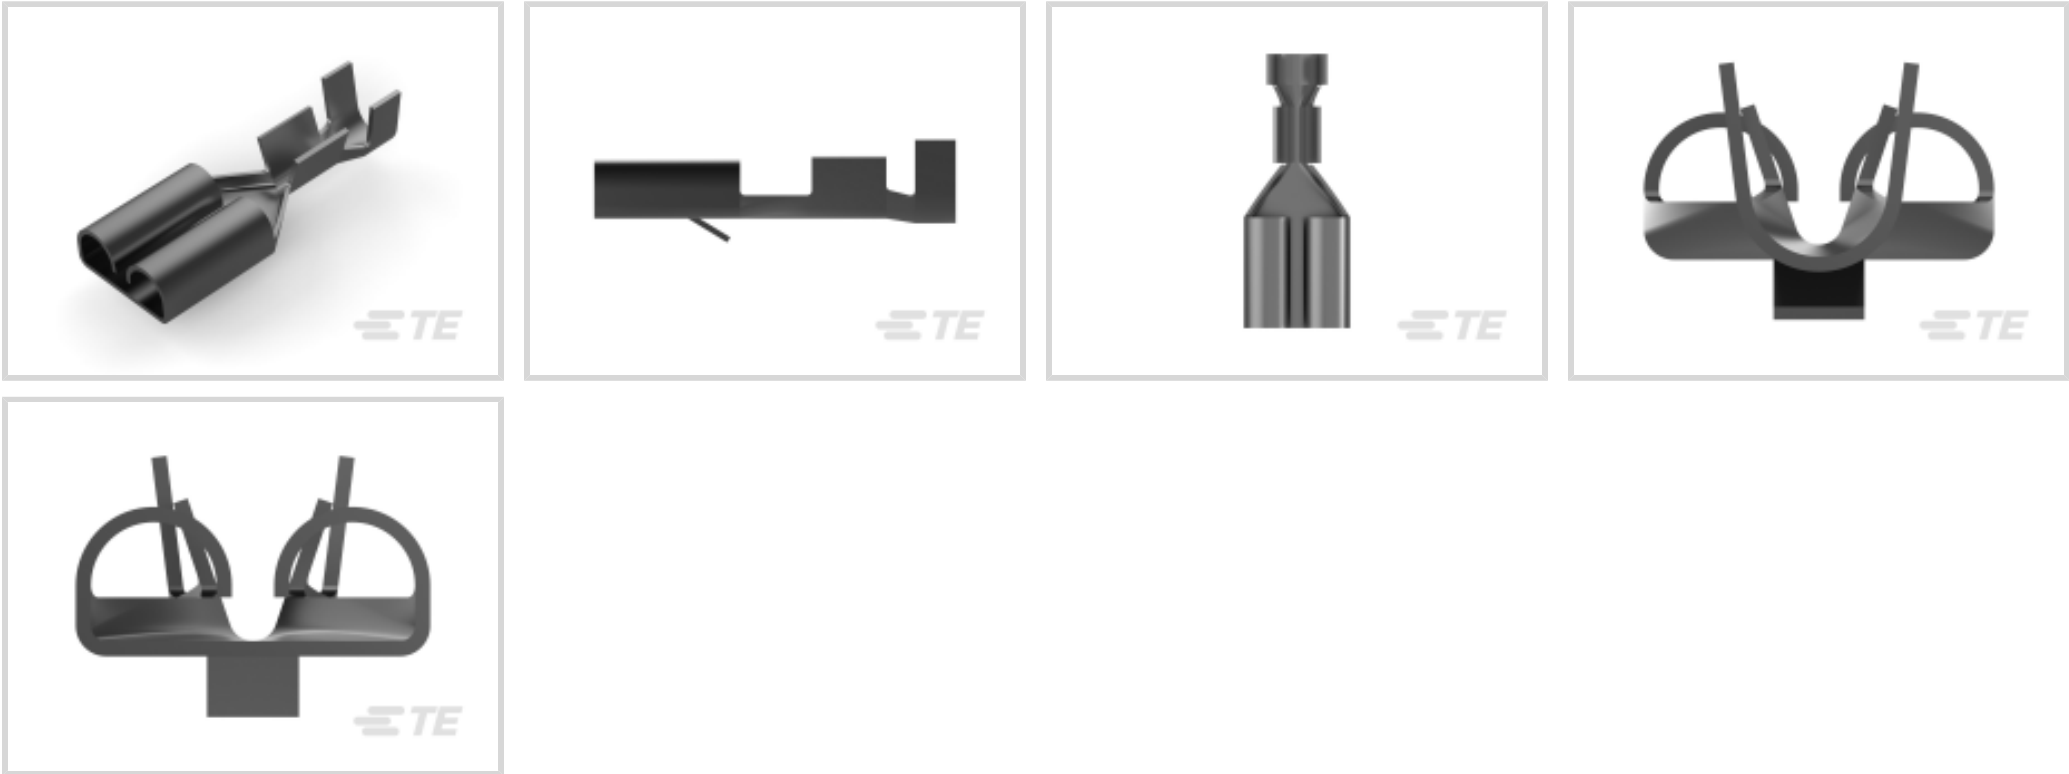




Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.51 - 1.65 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Locking Lance Height	.32 mm
Wire Insulation Support	With
Mating Retention Type	Locking Lance

Dimensions

Terminal Material Thickness	.33 mm[.013 in]
Product Length	19.2 mm[.755 in]
Compatible Insulation Diameter Range	2.31 - 3.3 mm[.091 - .13 in]
Wire Size	.51 - 1.65 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]

Packaging Features

Packaging Quantity	5000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

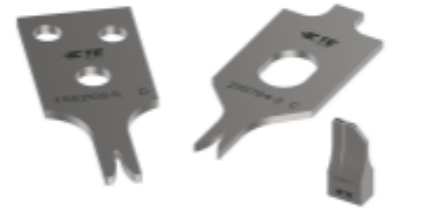
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these

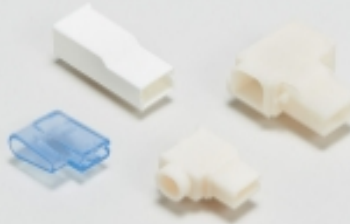


limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 1-1579007-4 EXTRACTION TOOL	 TE Part # 4-1579007-3 EXTRACTION TOOL KIT	 TE Part # 1-1904045-2 V23333Z1001A008-EV-100	 TE Part # 2150334-1 OCEAN_2.0_Applicator-E-090F130F-REM
 TE Part # 2150334-2 OCEAN_2.0_Applicator-E-090F130F-REA	 TE Part # 7-1633964-2 CRIMPER, INSULATION OV PREMIUM	 TE Part # 7-2150334-7 OCEAN_2.0_SPARE_PART_KIT-090F130F	 TE Part # 7-4150121-7 OCEAN_2.0_SPARE_PART_KIT-090F130OV
 TE Part # 4150121-2 OCEAN-2.0-APPLICATOR-E-090F120OV-REA	 TE Part # 7-2150334-1 OCEAN_2.0_Applicator-S-090F130F	 TE Part # 7-2150334-2 OCEAN_2.0_Applicator-S-090F130F	 TE Part # 7-4150121-2 OCEAN-2.0-APPLICATOR-E-090F120OV

Also in the Series | FASTIN-FASTON 250

 Crimp Terminal Housings(211)	 Insertion & Extraction Tools(2)	 PCB Terminals(2)	 Quick Disconnects(254)
---	--	---	---

Customers Also Bought



TE Part # 794772-8
08P MINI UMNL SEAL,DIE CUT

TE Part # HDP24-24-19PE
REC, 19P, BLK, E, 12/16, P

TE Part # 1473793-1
025 IDC 8POS CAP ASSY W TO W

TE Part # TB1141D4722-004
Single Pair Ethernet: IP67 M8 Cable, Hybrid Board Receptacle

TE Part # 5039584015
TPPEM-NR8-0-SP

TE Part # 444308-2
FRAME FUSE RELAY BOX

TE Part # 2389167-1
SDE F DEUTSCH (SIZE 12) 3.0-4.0mm2 ASSY

TE Part # 2391435-1
SDE F PIN/SOCKET 16-18 ASSY

TE Part # 6-2407269-4
CAP, CPC, SIZE 23 RECP, YELLOW

Documents

Product Drawings

FF 250 REC 0.5-1.5MM2 TPPB

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-160526-9_AR.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-160526-9_AR.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-160526-9_AR.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications



EBGeneral Application Specification for Open Barrel Terminals**

English

Application Specification

English