


## MICRO COAX Cable with IPEX Cabline UM

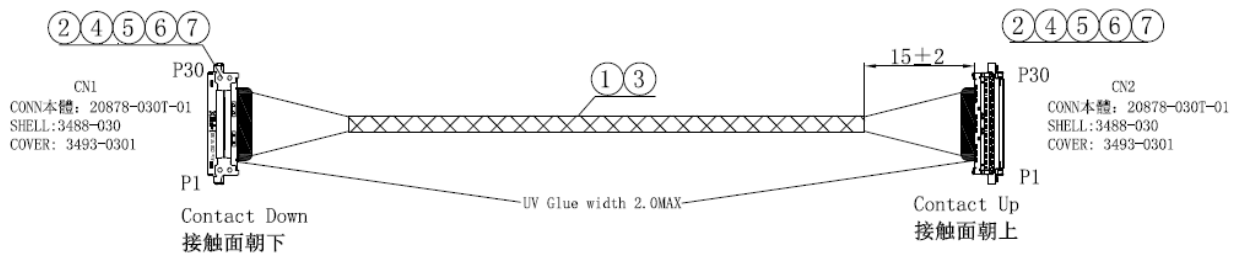

### Drawing (only for reference) shows round binding with acetate cloth tape

1 wire – micro coax	AWG 42/ 50Ω green UL11130
2 / 4 / 5 connector IpeX Cabline UM – 0.4 pitch / (30-40 Pos.)	Hsg.: 20878-0xxT-01; shell: 3488-0xx1 / Lock Cover 34930xx1 ( Receptacle 20879-0xxE-01)
3 Binding	Standard: Round binding with acetate cloth - E304309 >800mm Partial Round Binding
6 UV Glue	HD1232 width 2.0Max
7 Laser marking	Aix CUM YY.MM
Transfer rate	20Gbps
Operation temperature / rated voltage	-40°C - +85°C / 30V

All materials are RoHS / REACH compliant with UL File numbers from ISO certified suppliers



### How to Order

CUM – nn – LLL – ii – B C

C=Connection  
 1=Connection 1:1  
 N=Connection 1:N  
 X-000N customer specific

B=Binding  
 0=(null) w/o Binding  
**R=Round with Acetate Cloth**  
 P= Partial Round Binding  
 F=Flat with Acetate Cloth  
 S=Spiral  
 L=Laminated

ii=Impedance e.g. 50Ω

LLL=Length in mm optional

nn=No. of Position

CUM=Series Name: IPEX Cabline-UM

For Example: CUM-40-300-50-R1

Beschreibung: Cable IpeX Cabline CUY 30-30 Pos. TL500mm AWG42 50Ohm round binding 1:1

## MICRO COAX Cable with IPEX Cabline UM

### For Custom Solution fill in this Form

\*1 Use Supplier Pin Count

\*2 Choose: MC = Micro Coaxial or TC = Twin Coaxial or DW = Discrete Wire

\*3 Depending on Connector Specification – make sure wires of the same type are together

### Total Length:

	<- CN1	Partnumber	CN2 ->	
CN1	Wire	AWG	Impedance	CN2
Pin	Type		1/Ohm	Pin
*1	*2	*3		
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				