


MICRO COAX Cable with IPEX Cabline VS

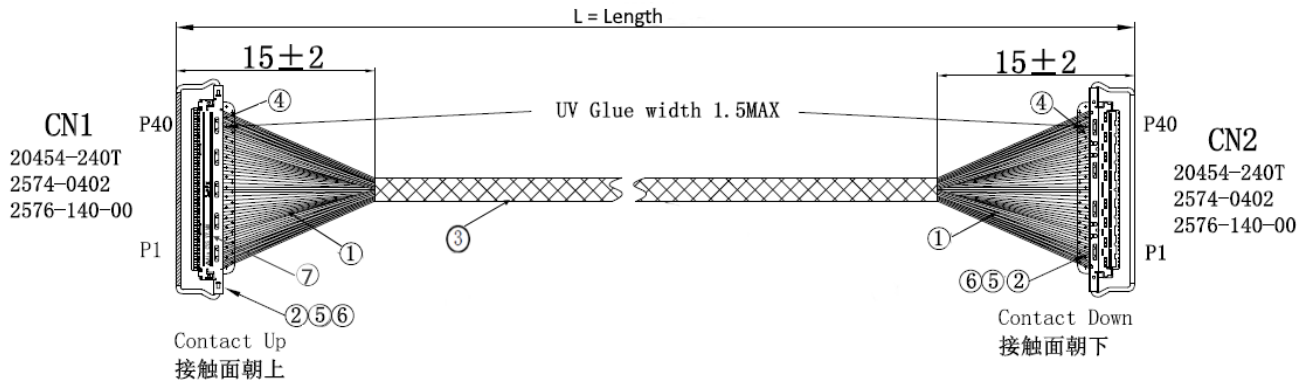

Drawing shows most common round binding with acetate cloth tape

1 wire – micro coax	AWG 40/ 50Ω Blue UL1354 – E81015
2 / 5 / 6 connector IpeX Cabline VS – 0.5 pitch (20-50 Pos.)	conn 20454-2xxT + shell 2574-0xx2 + Pull bar 2576-1xx-00 / (Receptacle 20455-0xxE-6)
3 Binding	Standard: Round binding with acetate cloth – E304309 >800mm Partial Round Binding
4 UV Glue	HD1232
7 Laser Marking	Aix CVS YY.MM
Transfer rate	20Gbps
Operation temperature / rated voltage	-40°C - +85°C / 30V

All materials are RoHS / REACH compliant with UL File numbers from ISO certified supplier



How to Order

CVS	nn	LLL	ii	B	C	C=Connection 1=Connection 1:1 N=Connection 1:N X-000N customer specific
					B=Binding 0=(null) w/o Binding R=Round with Acetate Cloth P=Partial Round Binding F=Flat with Acetate Cloth S=Spiral L=Laminated	
			ii			ii=Impedance e.g. 50Ω
		LLL				LLL=Length in mm optional
	nn					nn=No. of Position
CVS	CVS=Series Name: IPEX Cabline-VS					

Example for Reference:

CVS-40-300-50-R1

= IPEX Cabline VS 40 polig-300mm length- 50 Ohm – Round Binding – 1:1 connection

Dokumentenname: CVS-R02
Änderungsstand: R02-2023-08-18

ElectronAix GmbH & Co. KG
Metzgerstr.73
52068 Aachen, Germany

Tel +49-241-18906-90
info@electronaix.com
www.electronaix.com

MICRO COAX Cable with IPEX Cabline VS

For Custom Solution fill in this Form

*1 Use Supplier Pin Count

*2 Choose: MC = Micro Coaxial or TC = Twin Coaxial or DW = Discrete Wire

*3 Depending on Connector Specification – make sure wires of the same type are together

Total Length:

	<- CN1	Partnumber	CN2 ->	
CN1	Wire	AWG	Impedance	CN2
Pin	Type		1/Ohm	Pin
*1	*2	*3		
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				

