
**292156-2** ACTIVE

### AMP CT

TE Internal #: 292156-2 Connector Assembly, Plug to Plug Relay Header, Wire-to-Wire / Wire-to-Board, 6 Position, .078 in [2 mm] Centerline, 1 Row, White, Signal, AMP CT

### View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings

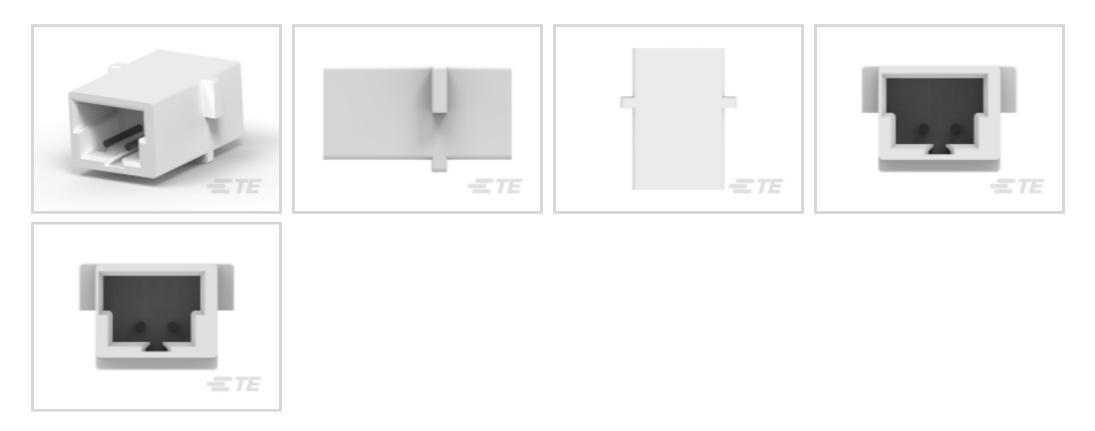

Connector Product Type: Connector Assembly Connector & Housing Type: Plug to Plug Relay Header Connector System: Wire-to-Board, Wire-to-Wire Number of Positions: 6 Centerline (Pitch): 2 mm [.078 in ]

### Features



### Product Type Features

| Connector Product Type           | Connector Assembly          |
|----------------------------------|-----------------------------|
| Connector & Housing Type         | Plug to Plug Relay Header   |
| Connector System                 | Wire-to-Board, Wire-to-Wire |
| Sealable                         | No                          |
| Configuration Features           |                             |
| Number of Positions              | 6                           |
| Number of Rows                   | 1                           |
| Electrical Characteristics       |                             |
| Operating Voltage                | 125 V                       |
| Body Features                    |                             |
| Primary Product Color            | White                       |
| Contact Features                 |                             |
| Contact Retention Within Housing | Without                     |

Connector Assembly, Plug to Plug Relay Header, Wire-to-Wire / Wire-to-Board, 6 Position, .078 in [2 mm] Centerline, 1 Row, White, Signal, AMP CT



| Contact Type                  | Pin                        |
|-------------------------------|----------------------------|
| Contact Base Material         | Brass                      |
| Contact Current Rating (Max)  | 2 A                        |
| Mechanical Attachment         |                            |
| Strain Relief                 | Without                    |
| Panel Mount Feature           | Without                    |
| Mating Retention              | Without                    |
| Connector Mounting Type       | Cable Mount (Free-Hanging) |
| Housing Features              |                            |
| Housing Material              | Nylon 66                   |
| Centerline (Pitch)            | 2 mm[.078 in]              |
| Dimensions                    |                            |
| Connector Length              | 7.8 mm[.307 in]            |
| Panel Thickness (Recommended) | .81 - 1.6 mm[.032063 in]   |
| Connector Height              | 12 mm[.472 in]             |
| Usage Conditions              |                            |
| Operating Temperature Range   | -40 - 105 °C[-40 - 221 °F] |

## **Operation/Application**

| Circuit Application   | Signal                                  |
|---|---|
| Industry Standards  |   |
| Compatible With Agency/Standards Products                       | CSA, UL                                 |
| Compatible With Approved Standards Products                     | UL Recognized                           |
| UL Flammability Rating  | UL 94V-0                                |
| Packaging Features  |   |
| Packaging Quantity  | 800                                     |
| Packaging Method  | Bag & Box                               |
|   |   |
| Product Compliance  |   |
| For compliance documentation, visit the product page on TE.com> |   |
| EU RoHS Directive 2011/65/EU                                    | Compliant                               |
| EU ELV Directive 2000/53/EC                                     | Compliant                               |
| China RoHS 2 Directive MIIT Order No 32, 2016                   | No Restricted Materials Above Threshold |

**C** For support call +1 800 522 6752

Connector Assembly, Plug to Plug Relay Header, Wire-to-Wire / Wire-to-Board, 6 Position, .078 in [2 mm] Centerline, 1 Row, White, Signal, AMP CT



| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2024<br>(240)<br>Candidate List Declared Against: JAN 2024<br>(240)<br>SVHC > Threshold:<br>Melamine (3% in Component Part)<br>Aticle Safe Usage Statements:<br>Wash thoroughly after handling. Do not handle until all safety precautions have<br>been read and understood. Recycle if possible and dispose of the article by<br>following all applicable governmental regulations relevant to your geographic<br>location. |
|--|---|
| Halogen Content                        | Low Halogen - Br, Cl, F, I < 900 ppm per<br>homogenous material. Also BFR/CFR/PVC<br>Free   |
| Solder Process Capability              | Not applicable for solder process capability  |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




## Also in the Series | AMP CT



Connector Assembly, Plug to Plug Relay Header, Wire-to-Wire / Wire-to-Board, 6 Position, .078 in [2 mm] Centerline, 1 Row, White, Signal, AMP CT



## Customers Also Bought

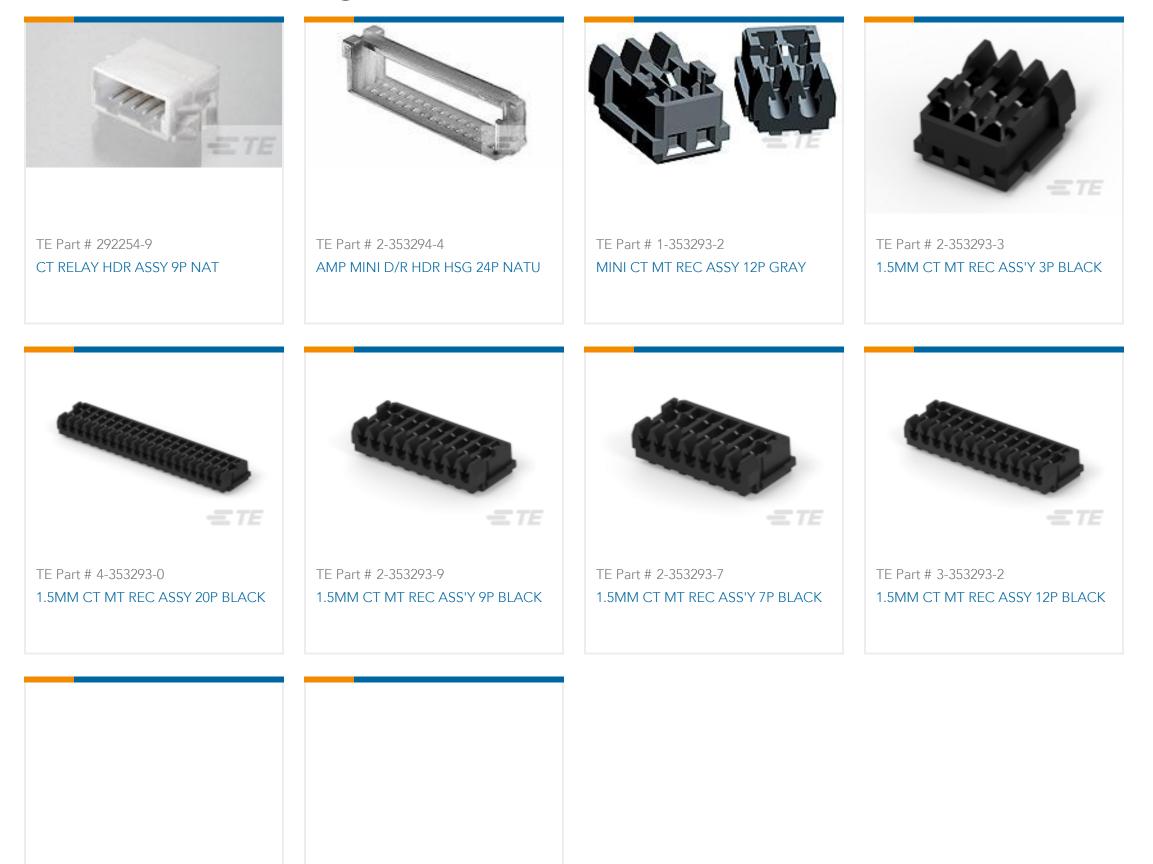

TE Part # 8-292112-4

TE Part # 8-292112-2

### Documents

Product Drawings CT RELAY HDR ASSY FREE HANGING

English

**CAD** Files

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_292156-2\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_292156-2\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_292156-2\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use

**C** For support call +1 800 522 6752

Connector Assembly, Plug to Plug Relay Header, Wire-to-Wire / Wire-to-Board, 6 Position, .078 in [2 mm] Centerline, 1 Row, White, Signal, AMP CT



Product Specifications Product Specification English AMP COMMON TERMINATION (CT), CONNECTOR, 2mm PITCH, M/T TYPE, LEAD FREE VERSION Japanese Product Specification Japanese