



Connectors > Contacts > Connector Contacts



Contact Type: **Socket**

Contact Mating Area Plating Material: **Gold**

Wire Contact Termination Area Plating Material: **Tin**

Operating Voltage: **600 VDC**

Features

Product Type Features

Discrete Wire Type	Stranded
--------------------	----------

Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

Contact Features

Mating Pin Diameter	1 mm[.039 in]
Contact Underplating Material Thickness	1.27 µm[50 µin]
Wire Contact Termination Area Plating Thickness	2.54 µm[100 µin]
Wire Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Type	Socket
Contact Mating Area Plating Material	Gold
Wire Contact Termination Area Plating Material	Tin
Contact Retention Within Housing	Without



Contact Base Material	Brass
Contact Current Rating (Max)	10.5 A

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Compatible Insulation Diameter Range	1.19 - 1.75 mm[.047 - .069 in]
Wire Size	.12 - .4 mm²

Usage Conditions

Operating Temperature Range	-55 - 105 °C[-67 - 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
UL Flammability Rating	UL 94V-0, UL 94V-2

Packaging Features

Packaging Quantity	7000
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 90758-2 PROCRIMP DIE MINI UNIV MNL	TE Part # 189727-1 EXTRACTION TOOL	TE Part # 455830-1 INSERTION TOOL	TE Part # 794215-1 24P MINI UMN2 CAP HSG UL94V0
TE Part # 794200-1 12P MINI UMN2 PLUG HSG MATRIX	TE Part # 794210-1 20P MINI UMN2 PLUG HSG UL94V0	TE Part # 794206-1 16P MINI UMN2 PLUG HSG UL94V0	TE Part # 794187-1 03P MINI UMN2 CAP HSG UL94V0
TE Part # 794205-1 15P MINI UMN2 CAP HSG UL94V0	TE Part # 794191-1 06P MINI UMN2 CAP HSG UL94V0	TE Part # 794196-1 10P MINI UMN2 PLUG HSG UL94V0	TE Part # 794192-1 08P MINI UMN2 PLUG HSG UL94V0





TE Part # 794193-1
08P MINI UMNL2 CAP HSG UL94V0



TE Part # 794241-1
04P MINI UMNL2 PLUG HSG UL94V2



TE Part # 794190-1
06P MINI UMNL2 PLUG HSG UL94V0



TE Part # 794186-1
03P MINI UMNL2 PLUG HSG UL94V0



TE Part # 794185-1
02P MINI UMNL2 CAP HSG UL94V0



TE Part # 794189-1
04P MINI UMNL2 CAP HSG UL94V0



TE Part # 794184-1
02P MINI UMNL2 PLUG HSG UL94V0



TE Part # 794212-1
22P MINI UMNL2 PLUG HSG UL94V0

Also in the Series | Mini-Universal MATE-N-LOK 2



Connector Contacts(35)




Insertion & Extraction Tools(1)



Rectangular Power Connectors(45)

Customers Also Bought

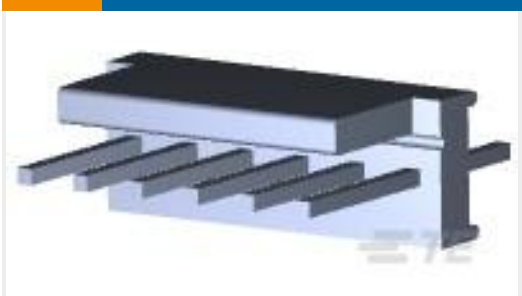


TE Part # 3-641124-6
06P MTA100 HDR ASSY P/STR LF




TE Part # 794192-1
08P MINI UMNL2 PLUG HSG UL94V0



TE Part # 1490745-1
HYP10 LIGHT DUTY 12T HEAD

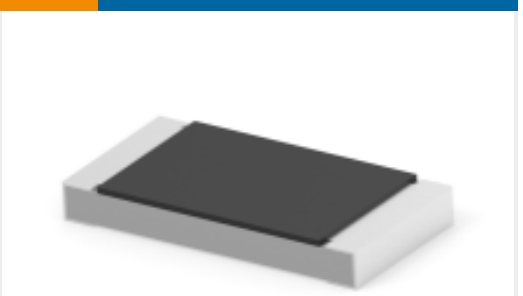

TE Part # 2176596-6
RLC73K 2H R681 1% 1K RL

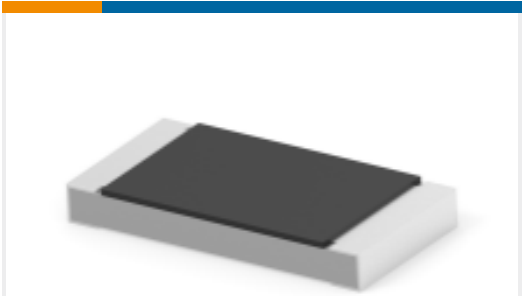

TE Part # 1-2176596-0
RLC73K 2H R75 1% 1K RL




TE Part # 2390328-1
Socket, Contact, 3.6 Dia BOT



TE Part # 2399992-1
KIT, 2P PLUG DOCKING, CHARGER



TE Part # 2399991-1
KIT, 2P RECPT DOCKING, BOT

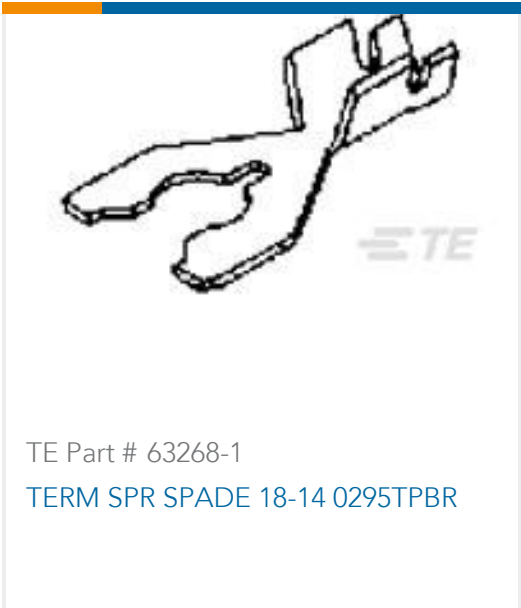

Documents

Product Drawings

MINI UNML2 SOK 26-22 AWG AU LF

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-794219-0_N.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-794219-0_N.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-794219-0_N.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications

Product Specification

English

Product Specification

English

Product Specification

English

Product Specification

English

Product Specification

English