


AMP | Junior Power Timer TE Internal #: 929504-1 Housing for Female Terminals, Wire-to-Wire, 4 Position, .197 in [5 mm] Centerline, Black, Wire & Cable, Power, Junior Power Timer View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > Timer Connector Housing



Connector System: Wire-to-Wire

Number of Positions: 4

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 5 mm [.197 in]

Sealable: No

All Timer Connector Housing (519)

Features

Product Type Features

Mixed & Hybrid Connector	No			
Connector Shape	Rectangular			
Connector System	Wire-to-Wire			
Connector & Housing Type	Housing for Female Terminals			
Sealable	No			
Connector & Contact Terminates To	Wire & Cable			
Primary Locking Feature	Integrated in Housing			
Configuration Features				
Number of Positions	4			
Number of Rows	2			
Body Features				
Cable Exit Angle	180°			
Primary Product Color	Black			
Contact Features				
Contact Size	2.8mm			
Contact Type	Receptacle			
Mating Tab Width	3 mm[.118 in]			

Housing for Female Terminals, Wire-to-Wire, 4 Position, .197 in [5 mm] Centerline, Black, Wire & Cable, Power, Junior Power Timer



Mechanical Attachment

Terminal Position Assurance	No Without				
Strain Relief					
Mating Alignment Type	Polarized				
Mating Alignment	With				
Connector Mounting Type	Cable Mount (Free-Hanging)				
Housing Features					
Housing Material	PBT				
Centerline (Pitch)	5 mm[.197 in]				
Dimensions					
Dimensions Connector Height	29.5 mm[1.16 in]				
	29.5 mm[1.16 in] 16 mm[.629 in]				
Connector Height					
Connector Height Product Width	16 mm[.629 in]				
Connector Height Product Width Product Length	16 mm[.629 in] 18.5 mm[.728 in]				
Connector Height Product Width Product Length Row-to-Row Spacing	16 mm[.629 in] 18.5 mm[.728 in]				

Operation/Application

Circuit Application	Power					
Packaging Features						
Packaging Quantity	3000					
Packaging Method	Carton					
Other						
Serviceable	No					
Connector Position Assurance Capable	No					
Product Compliance						
For compliance documentation, visit the product page on TE.com>						
EU RoHS Directive 2011/65/EU	Compliant					
EU ELV Directive 2000/53/EC	Compliant					
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold					
EU REACH Regulation (EC) No. 1907/2006						

Housing for Female Terminals, Wire-to-Wire, 4 Position, .197 in [5 mm] Centerline, Black, Wire & Cable, Power, Junior Power Timer



Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Halogen Content

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts










Housing for Female Terminals, Wire-to-Wire, 4 Position, .197 in [5 mm] Centerline, Black, Wire & Cable, Power, Junior Power Timer






Also in the Series | Junior Power Timer

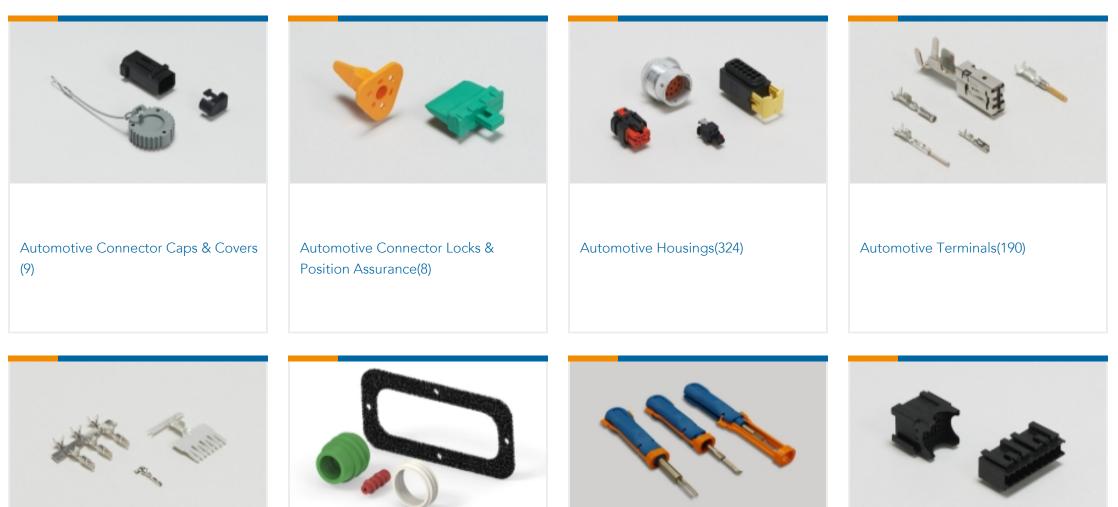

Busbars & Terminals(1)	Connector Seals & Cavity Plugs(9)	Insertion & Extraction Tools(8)	Module Components(4)

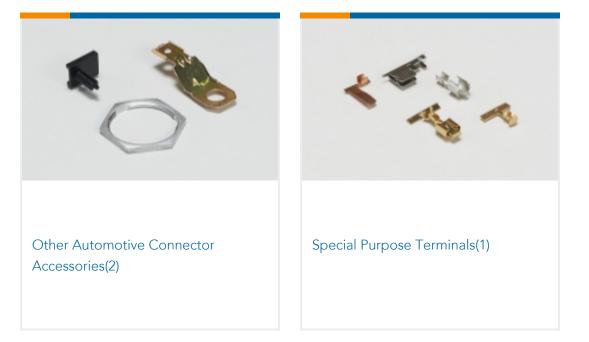

Customers Also Bought



Housing for Female Terminals, Wire-to-Wire, 4 Position, .197 in [5 mm] Centerline, Black, Wire & Cable, Power, Junior Power Timer



Documents

Product Drawings 2X 2P JUN POW TIMGH

English

CAD Files

Customer View Model

ENG_CVM_CVM_929504-1_N.2d_dxf.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_929504-1_N.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_929504-1_N.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

Timer Interconnection System

English