


Power Resistors, Heat Sink Mountable with Non-Inductive Designs

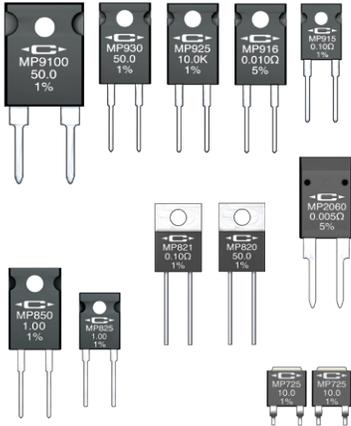

[MP915, MP916, MP925, MP930, and MP9100 TO-Style Power Film Resistors](#)

Model MP915, 15 Watts, TO-126 All Molded Package, Resistance 0.020 ohm to 1.00 K
 Model MP916, 16 Watts, TO-220 All Molded Package, Resistance 0.010 ohm to 0.019 ohm
 Model MP925, 25 Watts, TO-220 All Molded Package, Resistance 5.00 K to 100 K
 Model MP930, 30 Watts, TO-220 All Molded Package, Resistance 0.020 ohm to 4.99 K
 Model MP9100, 100 Watts, TO-247 All Molded Package, Resistance 0.050 ohm to 100 ohms

[MP2060 Power Film Resistor, Clip Mount, in the TO-220 Style Power Package](#)

60 Watts, up to 60 Amps maximum, TO-220 All Molded Package, Resistance 0.005 ohm to 1.00 K

[MP820 and MP821 Power Film Resistors in the TO-220 Style Power Package](#)

20 Watt Power Resistor, Power Package with Metal Mounting Tab
 Resistance 0.020 ohm to 10.0 K


[MP825 and MP850 Power Film Resistors, TO-126 and TO-220 Style Power Package](#)

Model MP825, 25 Watts, Integral Copper Heat Sink, Resistance 0.020 ohm to 10.0 K
 Model MP850, 50 Watts, Integral Copper Heat Sink, Resistance 0.200 ohm to 10.0 K

[MP725 Surface Mount Power Film Resistor in a D-Pak Style Power Package](#)

25 Watt Power Resistor, D-Pak Style Power Package for Surface Mount Applications
 Resistance 0.020 ohm to 1.00 K

Power Resistors, Axial Leads and Radial Leads with Non-Inductive Designs

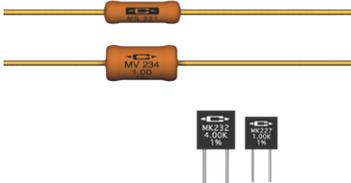

[Type MS Power Film Resistors](#)

Power Rating to 22 Watts, Voltage Rating to 6000 Volts,
 Max. Temperature +275°C, Non-Inductive Design, 18 Models


[Type MV Low Resistance Power Film Resistors](#)

Resistance from 0.1 ohm to 50 ohms, Power Rating to 10 Watts
 Max. Temperature +275°C, Non-Inductive Design

[MK232 and MK227 Precision Power Film Resistors with Non-Inductive Design](#)

3/4 Watt at 400 Volts Max. and 1/2 Watt at 200 Volts Max. at +85°C,
 Resistance 1 ohm to as high as 5 Megohms

Current Sense, Low Resistance with Non-Inductive Designs

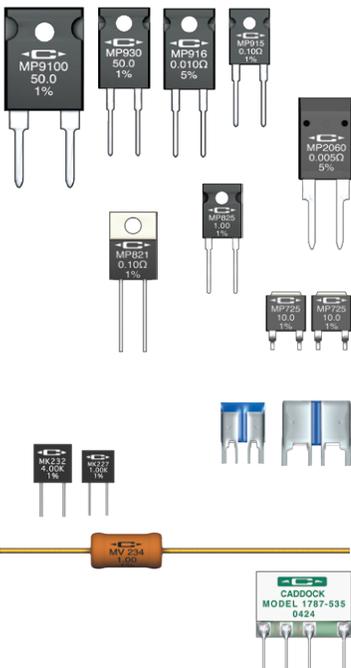

[MP915, MP916, MP930 and MP9100 TO-Style Power Film Resistors](#)

Model MP915, 15 Watts, TO-126 All Molded Package, Resistance down to 0.020 ohm
 Model MP916, 16 Watts, TO-220 All Molded Package, Resistance down to 0.010 ohm
 Model MP930, 30 Watts, TO-220 All Molded Package, Resistance down to 0.020 ohm
 Model MP9100, 100 Watts, TO-247 All Molded Package, Resistance down to 0.050 ohm

[MP2060 Clip Mount Power Film Resistor in the TO-220 Style Power Package](#)

60 Watts, up to 60 Amps maximum, TO-220 All Molded Package, Resistance down to 0.005 ohm

[MP825 Power Film Resistor, TO-126 Style Power Package](#)

25 Watts, Integral Copper Heat Sink, Resistance as low as 0.020 ohm

[MP821 Power Film Resistors in the TO-220 Style Power Package](#)

20 Watt Power Resistor, Power Package with Metal Mounting Tab
 Resistance as low as 0.020 ohm at 1% tolerance

[MP725 Surface Mount Power Film Resistor in a D-Pak Style Power Package](#)

25 Watt Power Resistor, D-Pak Style Power Package for Surface Mount Applications
 Resistance as low as 0.020 ohm

[Type SR Precision Current Sense Resistors](#)

Compact Design with Kelvin Terminals, Absolute tolerance of 1%,
 1 and 2 Watt Versions at +70°C, Resistance Values 0.008 ohm to 1.00 ohm

[MK232 and MK227 Precision Power Film Resistors](#)

3/4 and 1/2 Watt Ratings at +85°C, Resistance as low as 1 ohm


[Type MV Low Resistance Power Film Resistors](#)

Resistance as low as 0.1 ohm, Power Rating to 10 Watts,
 Max. Temperature +275°C

[Type 1787 Precision Current Sense Resistor Networks](#)

3 and 4-step Current Sense Resistor Networks for Current Sensing in
 Multi-Range Instrumentation, Absolute Tolerance of 0.25% to 0.05%

Precision and Ultra-Precision Discrete Resistors

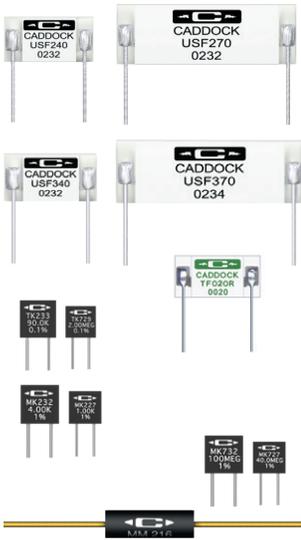

Type USF 200 Series Ultra-Stable Low TC Ultra-Precision Film Resistors

Standard Resistance Values from 50 Ω to 10 Megohm
 Max Absolute TC of 2ppm/ $^{\circ}$ C, -40 $^{\circ}$ C to +85 $^{\circ}$ C referenced to +25 $^{\circ}$ C
 Tolerance 0.01% or 0.1%
 Voltage Ratings from 300 Volts to 2500 Volts

Type USF 300 Series Ultra-Stable Low TC Ultra-Precision Film Resistors

Standard Resistance Values from 50 Ω to 20 Megohm
 Max Absolute TC of 5ppm/ $^{\circ}$ C -40 $^{\circ}$ C to +85 $^{\circ}$ C referenced to +25 $^{\circ}$ C
 Tolerance 0.01% or 0.1%
 Voltage Ratings from 300 Volts to 2500 Volts

Type TF Low TC Ultra-Precision Film Resistors

Tolerance to 0.01% Resistance Range from 1 Kohm to 125 Megohms,
 Temperature Coefficient 5, 10 or 15 ppm/ $^{\circ}$ C from -15 $^{\circ}$ C to +105 $^{\circ}$ C

Type TK Precision Low TC, Radial-Lead Film Resistors

Tolerance 0.1% to 0.05%, Resistance Range from 1 Kohm to 10 Megohms,
 Temperature Coefficient of 5, 10 or 20 ppm/ $^{\circ}$ C from -40 $^{\circ}$ C to +125 $^{\circ}$ C

MK232 and MK227 Precision Power Film Radial-Lead Resistors

Tolerance 1.0% to 0.1%, 3/4 and 1/2 Watt Ratings at +85 $^{\circ}$ C, 1 ohm to 5 Megohms


MK732 and MK727 Extended Resistance Range Radial-Lead Film Resistors

Tolerance 1.0% to 0.1%, Resistance Range from 2.1 Megohms to 100 Megohms

Type MM Precision Film Resistors

Tolerance 1.0% to 0.1%, High Temperature Resistors for Geophysical, Aerospace and Industrial Requirements

Precision and Ultra-Precision Resistor Networks and Custom Resistor Networks

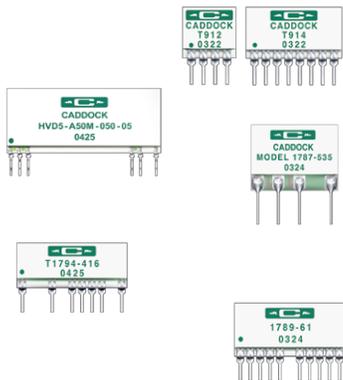

Type T912 and T914 Precision and Ultra-Precision Networks with Low Ratio TC

Two Resistor and Four Resistor Networks with Precise Ratio Performance,
 Ratio Tolerance from 0.1% to 0.01%, Ratio TC 10 ppm/ $^{\circ}$ C to 2 ppm/ $^{\circ}$ C

Type 1776 Precision Decade Resistor Voltage Dividers

39 Models of Input Voltage Dividers for Digital Multimeters and other
 Range-Switching Circuits, Ratio Tol. 0.5% to 0.02%, Ratio TC 50 ppm/ $^{\circ}$ C to 5 ppm/ $^{\circ}$ C

Type 1787 Precision Current Sense Resistor Networks

3 and 4-step Current Sense Resistor Networks for Current Sensing in
 Multi-Range Instrumentation, Absolute Tolerance of 0.25% to 0.05%


Type T1794 Custom Low Ratio TC, Precision SIP Resistor Networks

Ratio TC to 5 ppm/ $^{\circ}$ C, Ratio Tolerance to 0.01%,
 Resistance Range from 500 ohms to 50 Megohms

Type 1789 Custom Low Resistance Value, Precision SIP Resistor Networks

Ratio TC to 15 ppm/ $^{\circ}$ C, Ratio Tolerance to 0.05%,
 Resistance Range from 0.5 ohm to 10,000 ohms

High Temperature Resistors, 275 $^{\circ}$ C, Non-Inductive Designs are available

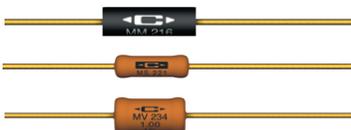

Type MM Precision Film Resistors

High Temp. Resistors for Geophysical, Aerospace, and Industrial, Max. Temp. +275 $^{\circ}$ C

Type MS Power Film Resistors

Power Rating to 22 Watts, Max. Temperature +275 $^{\circ}$ C, Non-Inductive Design, 18 Models

Type MV Low Resistance Power Film Resistors

Resistance from 0.1 ohm to 50 ohms, Power Rating to 10 Watts,
 Max. Temp. +275 $^{\circ}$ C

High Voltage Resistors, Low TC and Precision



Type USG Ultra-Stable Low TC Precision High Voltage Resistors

Temperature Coefficient of 10 ppm/°C from -40°C to +85°C

Type TG Low TC Precision High Voltage Resistors

Temperature Coefficient of 25 ppm/°C from -55°C to +125°C


Type MG Precision High Voltage Resistors with Extended Resistance Range

Resistance Value to as high as 10,000 Megohms, TC of 80 ppm/°C

Type MX Precision High Voltage Resistors

High Voltage Resistors for Commercial and Industrial Applications

Voltage Dividers, Precision and Ultra-Precision, Input Voltage Rating up to 20,000 Volts

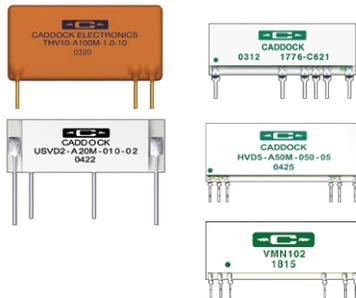

Type THV Precision High Voltage Divider Networks

Ratio Temperature Coefficient to 10 ppm/°C from -55°C to +125°C
Ratio Tolerance to 0.25% at 10 KVDC, 15 KVDC or 20 KVDC

Type HVD Ultra-Precision Voltage Divider Networks

Up to 5KVDC, Ratio Temperature Coefficient to 5 ppm/°C from -40°C to +85°C, Ratio Tol. of 0.05%

Type USVD Ultra-Precision Voltage Divider Networks

Up to 2KVDC, Ratio Temperature Coefficient 2 ppm/°C from -40°C to +85°C, Ratio Tol. to 0.01%

Type 1776 Precision Decade Resistor Voltage Dividers for Range Switching Instruments


39 Models up to 1200 volts, Voltage Division of 10,000:1, 1,000:1, 100:1, 10:1.

Ratio Tol. 0.5% to 0.02%, Ratio TC 50 ppm/°C to 5 ppm/°C

Type VMN Voltage Monitoring Resistor Networks Transient Tolerant

For Industrial Power Quality and Power Consumption Metering
High Stability when exposed to power line impulse voltage conditions

Surface Mount Resistors for SMT Applications

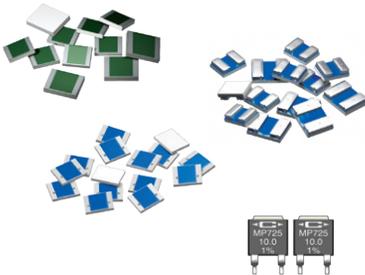

Type CC Low Resistance Precision Chip Resistors

Resistance range down to 0.010 ohm at ±5%, 0.050 ohm at ±2%, and 0.10 ohm at ±1%,
Style FC and Style WB. Sizes 1512, 2015, and 2520

Type CD Low Resistance Precision Chip Resistors with Pedestal Terminals

Tolerance ±1% for all resistance values, Resistance range 0.010 ohm to 0.20 ohm,
Style FC and Style WB. Sizes 2015, and 2520


Type CHR High Resistance Precision Chip Resistors Size 2520, Style FC

Resistance range 10 Meg to 100 Meg, Tolerance 1%
Temperature Coefficient of 25 ppm for values up to 25 Meg

MP725 Surface Mount Power Film Resistor in a D-Pak Style Power Package

25 Watt Power Resistor, D-Pak Style Power Package for Surface Mount Applications
Resistance 0.020 ohm to 1.00 K

Telephone Line Interface Resistor Networks and Custom Resistor Networks



LC2000 Series Standard Transient Tolerant Precision Resistor Networks

Lightning Transient Handling with Optional Thermal Cut-off Protection or Optional
Thermistor Temperature Sensing Element for Telephone Line Card Applications
Resistor Networks available which meet the requirements of GR-1089-CORE and ITU-T K.20

LC2000 Series Custom Transient Tolerant Resistor Networks

Lightning Transient Handling Custom Resistor Networks for Telephone Line Card Applications