



50 Ohm SMA Male To 75 Ohm F Female Matching Pad
Operating From 0.009 MHz to 3 GHz RoHS Compliant

Matching Pads Technical Data Sheet

PE70MP1006

Configuration

Design	Fixed
Connector 1	SMA Male
Connector 2	F Female

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	9 KHz		3 GHz	

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Range	9KHz to 2	2 to 3				GHz
Insertion Loss, Max	6	6.3				dB
Insertion Loss, Typ	5.5	5.5				dB
Return Loss, Min	25	23				dB
Return Loss, Typ	30	27				dB
Flatness	0.5	0.8				dB
VSWR	1.07:1	1.1:1				

Mechanical Specifications

Size	
Length	2.52 in [64.01 mm]
Width/Dia.	0.81 in [20.57 mm]
Height	0.81 in [20.57 mm]
Body Material and Plating	Copper

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	F Female
Impedance	50 Ohms	75 Ohms

Compliance Certifications (visit www.Pasternack.com for current document)
RoHS Compliant

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Male To 75 Ohm F Female Matching Pad Operating From 0.009 MHz to 3 GHz RoHS Compliant PE70MP1006](#)



50 Ohm SMA Male To 75 Ohm F Female Matching Pad
Operating From 0.009 MHz to 3 GHz RoHS Compliant

Matching Pads Technical Data Sheet


PE70MP1006

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

Typical Performance Data

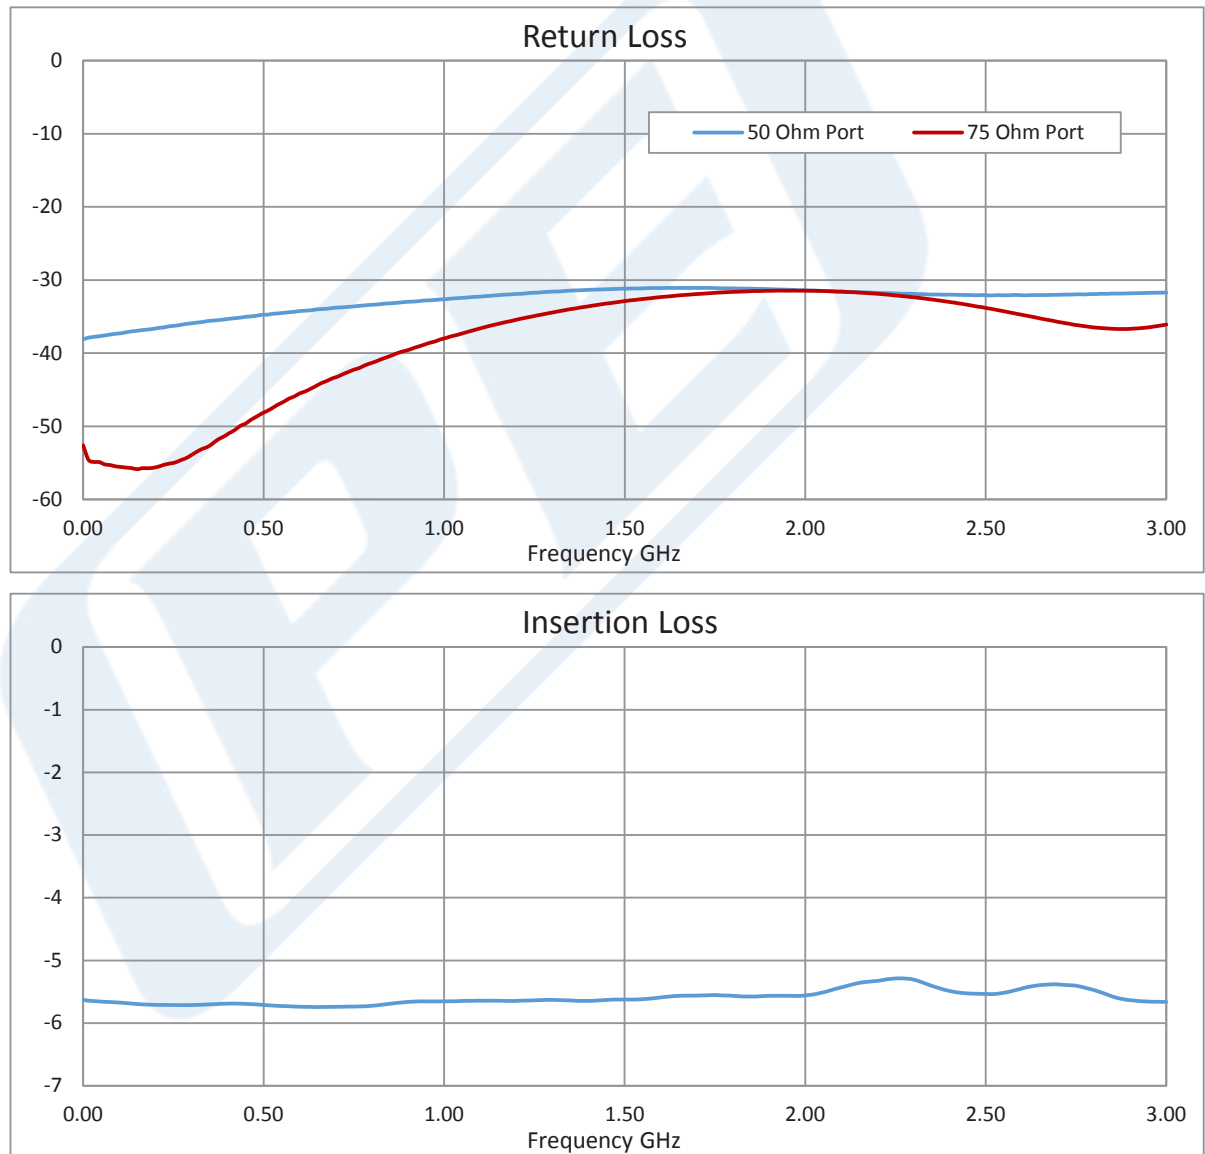

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Male To 75 Ohm F Female Matching Pad Operating From 0.009 MHz to 3 GHz RoHS Compliant PE70MP1006](#)



50 Ohm SMA Male To 75 Ohm F Female Matching Pad
Operating From 0.009 MHz to 3 GHz RoHS Compliant

Matching Pads Technical Data Sheet

PE70MP1006

50 Ohm SMA Male To 75 Ohm F Female Matching Pad Operating From 0.009 MHz to 3 GHz RoHS Compliant from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Male To 75 Ohm F Female Matching Pad Operating From 0.009 MHz to 3 GHz RoHS Compliant PE70MP1006](http://www.pasternack.com/50-ohm-sma-male-75-ohm-f-female-matching-pad-3-ghz-pe70mp1006-p.aspx)

URL: <http://www.pasternack.com/50-ohm-sma-male-75-ohm-f-female-matching-pad-3-ghz-pe70mp1006-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE70MP1006 CAD Drawing

50 Ohm SMA Male To 75 Ohm F Female Matching Pad Operating
From 0.009 MHz to 3 GHz RoHS Compliant

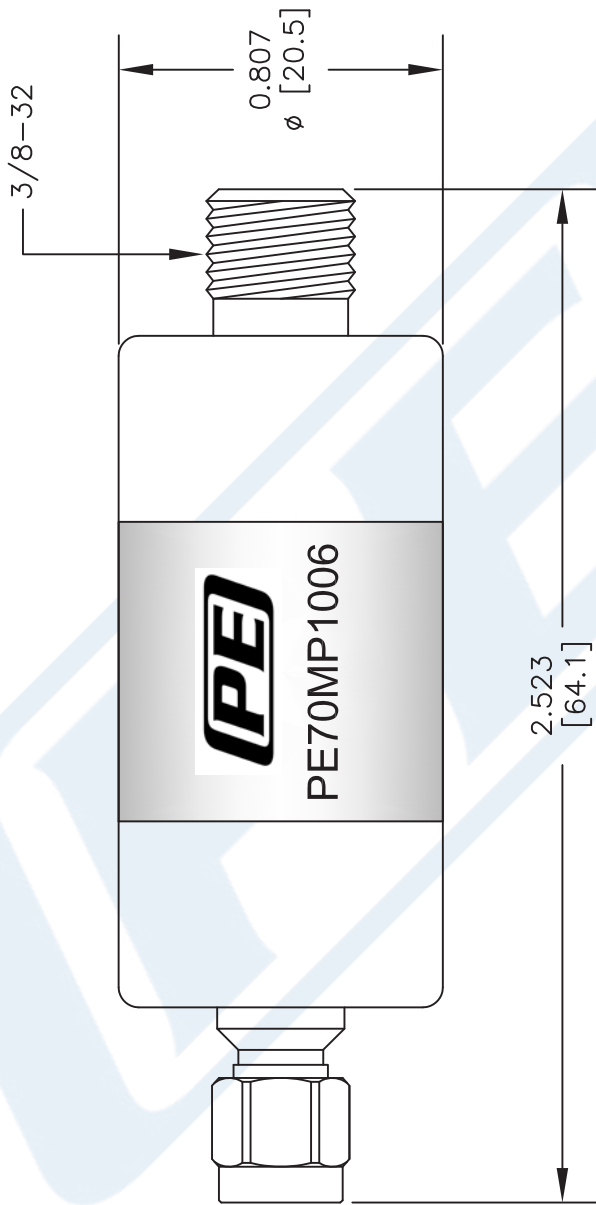

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE70MP1006

FSCM NO. 53919

2233

SIZE A

SCALE N/A

CAD FILE 052815

PE PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com