

WR-137 Waveguide Shim, CPR-137F and CPR-137G Flanges, Frequency Range: 5.38 GHz to 8.17 GHz, 5 mm Thick Brass Construction

Waveguide Accessories Technical Data Sheet

PEW137FS5

Features

- WR-137 Waveguide Shim
- CPR-137F and CPR-137G Flange Configuration
- Frequency Range: 5.38 GHz to 8.17 GHz
- 5 mm Thick Brass Construction


Description

PEW137FS5 is a WR-137 waveguide shim with operating frequency range from 5.38 GHz to 8.17 GHz. This waveguide shim is fabricated with 5 mm thick brass by high precision manufacturing process. PEW137FS5 can be used to bridge gaps between WR-137 waveguide components with UG-Cover Square flanges. Pasternack offers wide selection of waveguide components with high performance available in stock and same-day shipping to customers worldwide.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	5.38		8.17	GHz

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-137 Waveguide Shim, CPR-137F and CPR-137G Flanges, Frequency Range: 5.38 GHz to 8.17 GHz, 5 mm Thick Brass Construction PEW137FS5](#)



WR-137 Waveguide Shim, CPR-137F and CPR-137G Flanges, Frequency Range: 5.38 GHz to 8.17 GHz, 5 mm Thick Brass Construction

Waveguide Accessories Technical Data Sheet

PEW137FS5

Mechanical Specifications

Body Material	Brass
Body Finish	Anticorrosion Grey Paint
Length	0.197 in [5 mm]
Width	2.689 in [68.3 mm]
Height	1.937 in [49.2 mm]
Weight	0.05 lbs [22.68 g]

Compliance Certifications (see [product page](#) for current document)


WR-137 Waveguide Shim, CPR-137F and CPR-137G Flanges, Frequency Range: 5.38 GHz to 8.17 GHz, 5 mm Thick Brass Construction from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-137 Waveguide Shim, CPR-137F and CPR-137G Flanges, Frequency Range: 5.38 GHz to 8.17 GHz, 5 mm Thick Brass Construction PEW137FS5](#)

URL: <https://www.pasternack.com/wr-137-waveguide-shim-5-mm-brass-cpr-137f-pew137fs5-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

WR-137 Waveguide Shim, CPR-137F and CPR-137G Flanges, Frequency Range: 5.38 GHz to 8.17 GHz, 5 mm Thick Brass Construction

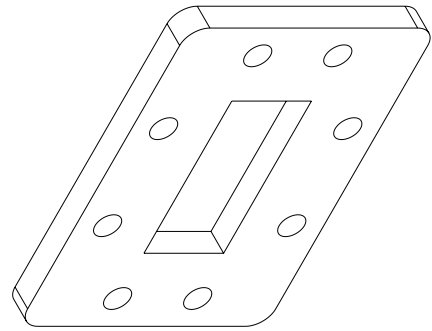[illegible]

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN WHOLE OR IN PART WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

6	5	4	3	2	1
---	---	---	---	---	---