



43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High Power GaN Amplifier, SMA, Class AB

TECHNICAL DATA SHEET

PE15A5066

The PE15A5066 is a high power amplifier that operates from 2 GHz to 6 GHz and generates 20 watts of saturated output power. The module utilizes Gallium Nitride (GaN) and chip-and-wire technology in the manufacturing process that ensures state-of-the-art power performance with excellent power-to-volume ratio that's ideal for broadband high power linear applications. This Class AB amplifier is designed for a 50 ohm input/output impedance and offers high efficiency and high linearity, operating over a wide dynamic range with impressive typical performance that includes 43 dB gain, 30% power added efficiency, ± 2 dB gain flatness, -15 dBc harmonic suppression, -60 dBc Spurious, and a maximum input power level of +10 dBm. Typical DC bias requirements include +28V and 3A of current. The module uses an SMA female input and output connector. The DC interface incorporates a D-Sub 9 pin male connector for DC bias, Enable with TTL logic control, Current Sense, and Temperature Sense functions. A mating female D-SUB socket connector is included. The rugged amplifier design operates over wide temperature range from -20°C and +60°C and can withstand relative humidity exposure up to 95% maximum. An available heatsink with cooling fan (model PE15G5068F) is recommended to maintain an optimum baseplate temperature during operation.

Features

- GaN Design
- 2 GHz to 6 GHz Frequency Range
- Psat 50 Watts typ
- Power Gain: 43 dB typ
- Power Added Efficiency: 30%
- Gain Flatness ± 2 dB typ
- Enable with TTL Logic Control
- Current and Temperature Sense Functions
- 50 Ohms Input and Output Matched
- Broadband and High Power
- Low Distortion
- D-Sub Control Connector with Mating Female Connector
- Optional Heatsink Available: Model PE15G5068F

Applications

- Military Radio
- Communication Systems
- High Gain Driver Power Amplifier
- S&C Band Applications
- Test and Measurement applications

Electrical Specifications (TA = +25°C)

Description	Minimum	Typical	Maximum	Units
Frequency Range	2		6	GHz
Small Signal Gain		43		dB
Gain Flatness		± 2		dB
Pout at Sat.		43		dBm
Efficiency (PAE)		30		%
Harmonics @10 Watts		-15		dBc
Spurious @10 Watts		-60		dBc
Impedance (Input)		50		Ohms
Impedance (Output)		50		Ohms
Input VSWR			3:01	
Input Return Loss			-10	dB
Operating DC Voltage	24	28	32	Volts
Operating DC Current @20 Watts		3		A
OFF/ON Switch Time (10% to 90%)		2	4	μ s
Operating Temperature Range	-20		60	°C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High Power GaN Amplifier, SMA, Class AB PE15A5066](#)



43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High
Power GaN Amplifier, SMA, Class AB

TECHNICAL DATA SHEET

PE15A5066

Electrical Specification Notes:

Allow for 20% Increased DC Current during initial power-up stage

Absolute Maximum Rating

Parameter	Rating
Input RF drive level without damage	+10 dBm (Max)
Load VSWR @ Pout = 15 W	∞ @ all load phase & amplitude for duration of 1 minute; 3:1 @ all load phase & amplitude continuous
Over Temperature	85°C @ heatsink [restored @ 60°C]



ESD Sensitive Material,
Transport material in
Approved ESD bags.
Handle only in approved
ESD Workstation.

Mechanical Specifications

Size

Length

6.23 in [158.24 mm]

Width

3.94 in [100.08 mm]

Height

0.98 in [24.89 mm]

Weight

2.64 lbs [1.2 kg]

Input Connector

SMA Female

Output Connector

SMA Female

Bias Connector

9-Pin D-Subminiature Male

Environmental Specifications

Temperature

Operating Range

-20 to +60 deg C

Storage Range

-25 to +65 deg C

Humidity

95% Non-Condensing

Shock

Normal Truck Transport

Vibration

Normal Truck Transport

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High Power GaN Amplifier, SMA, Class AB PE15A5066](#)

43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High
Power GaN Amplifier, SMA, Class AB



TECHNICAL DATA SHEET

PE15A5066

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- Heatsink Required for Proper Operation Recommended Model: PE15G5068F

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High Power GaN Amplifier, SMA, Class AB PE15A5066](#)



43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High
Power GaN Amplifier, SMA, Class AB

TECHNICAL DATA SHEET

PE15A5066

Amplifier Power-up Precautions

- 1.) Confirm that proper ESD precautions and controls are always in place before handling any Amplifier module.
- 2.) Confirm adequate thermal management is in place to effectively dissipate heat away from the Amplifier package. The Amplifier operational baseplate temperature must be within the operational temperature range stated in the Amplifier datasheet. Depending on the design and thermal requirements, using a heatsink with cooling fan is always recommended for safe reliable operation. A heat sink without a cooling fan may also be used. Damage caused from overheating will void the warranty.
- 3.) Confirm adequate system grounding is established. The DC power supply and Amplifier must have a common ground in order to operate properly.
- 4.) Power Amplifiers may require additional DC Current when initially powered-up. Depending on the design, the input current draw could range from an additional 10% to 100% above the maximum rated DC current of the Amplifier. This varies based on product part number.
- 5.) Confirm the DC power supply, if limited, is set to allow for additional start-up current that's rated for the Power Amplifier.
- 6.) Confirm the system is designed and calibrated for 50 ohms. Any impedance mismatch may cause performance issues.
- 7.) Perform a CALIBRATION (if required) with the loads before connecting the Amplifier to the Network Analyzer to ensure proper performance.
- 8.) Use a fixed attenuator between the signal source and input port of the Amplifier to optimize the input VSWR match.
- 9.) Confirm the input power level at the input port of the amplifier does not exceed the maximum rated limit for input power (as stated in the Amplifier datasheet).
 P_{in} for Small Signal Gain = P1dB-SSG-10 dB
 P_{in} for P1dB = P1dB-SSG+1 dB
- 10.) Confirm the Network Analyzer is always connected to the Amplifier first before DC power is applied to the Amplifier.
- 11.) As long as the input and output ports of the amplifier are connected to a 50Ohm load and RF signal power is applied, the Amplifier can be powered up with DC voltage.
- 12.) Confirm the Amplifier output load is matched for a 50 Ohm impedance and will not exceed the maximum rated VSWR or Return Loss limit for the Amplifier. Exceeding the maximum rated VSWR or Return Loss limit will result in reflected signal power that could damage the Amplifier and void the warranty.
- 13.) **Power Amplifier connected to an Antenna for signal transmission** - It's strongly recommended to use a high power fixed attenuator pad or an Isolator between the output port of the Amplifier and input port to the antenna. Any reflected signal power due to impedance mismatch will likely damage the Amplifier and void the warranty.
- 14.) The attenuator or isolator used at the output port of the Amplifier must be rated to handle the output power level and operational frequency band of the amplifier.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High Power GaN Amplifier, SMA, Class AB PE15A5066](#)

43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High
Power GaN Amplifier, SMA, Class AB



TECHNICAL DATA SHEET

PE15A5066

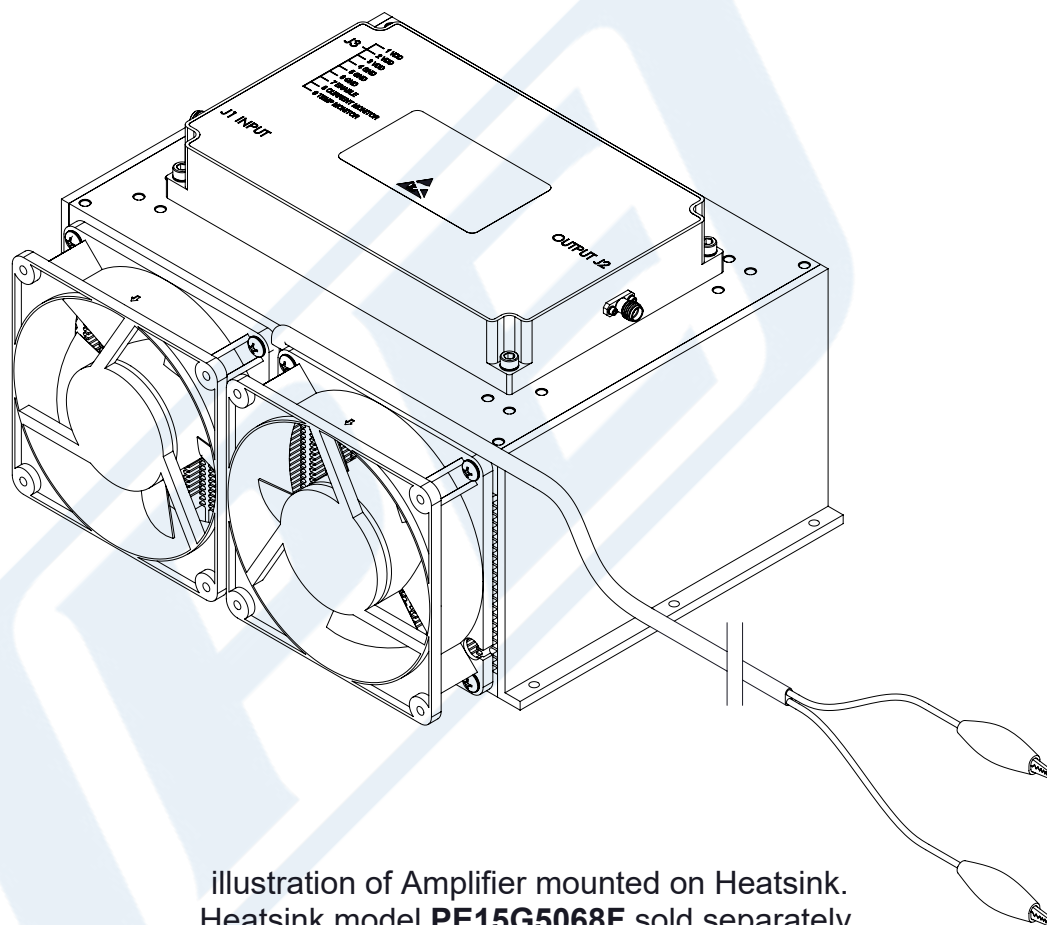


illustration of Amplifier mounted on Heatsink.
Heatsink model **PE15G5068F** sold separately.
(Picture shown for Reference Only)

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High Power GaN Amplifier, SMA, Class AB PE15A5066](#)


43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High
Power GaN Amplifier, SMA, Class AB




TECHNICAL DATA SHEET

PE15A5066

Functional Block Diagram

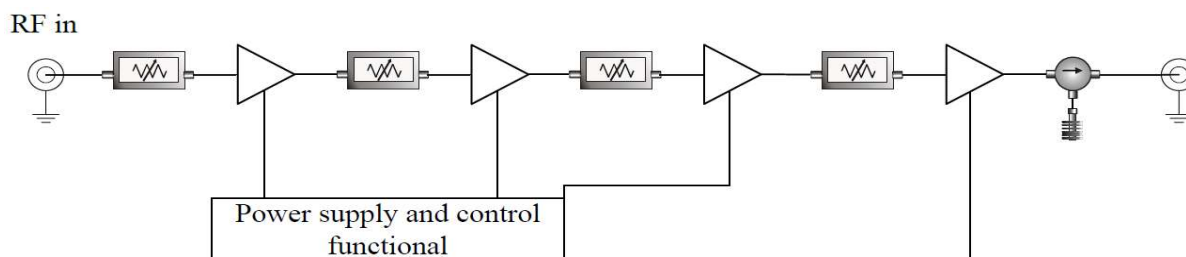

Typical Performance Data

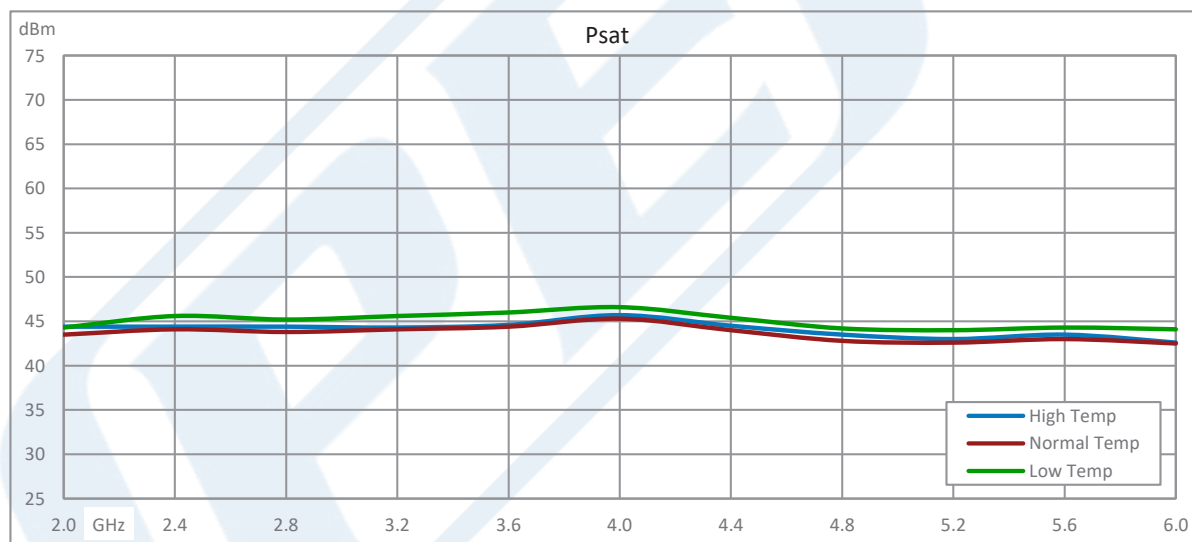


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High Power GaN Amplifier, SMA, Class AB PE15A5066](#)

43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High
Power GaN Amplifier, SMA, Class AB



TECHNICAL DATA SHEET

PE15A5066

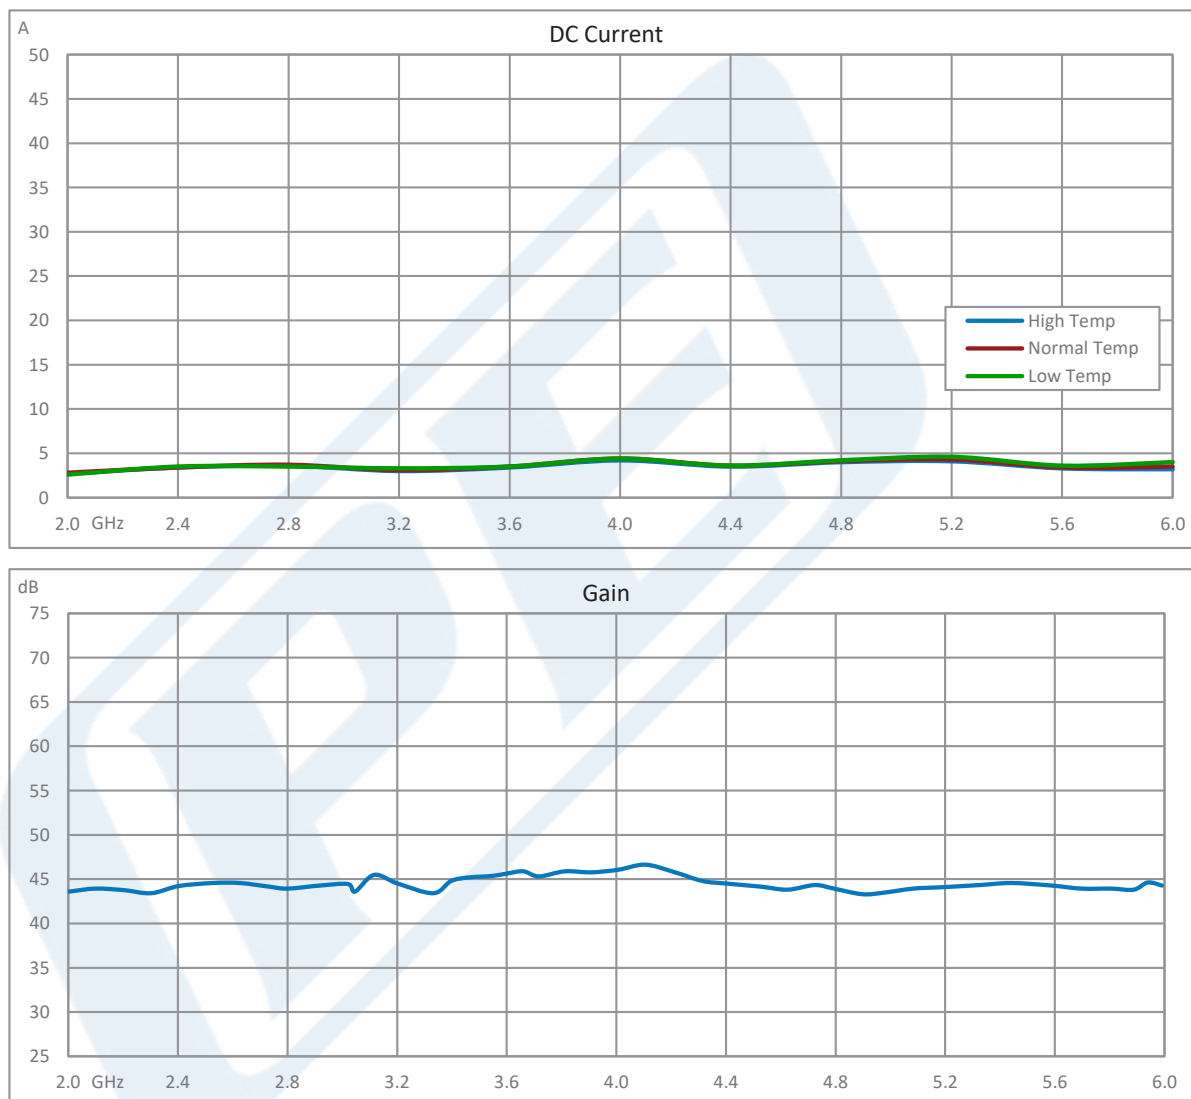


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High Power GaN Amplifier, SMA, Class AB PE15A5066](#)

43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High
Power GaN Amplifier, SMA, Class AB



TECHNICAL DATA SHEET

PE15A5066

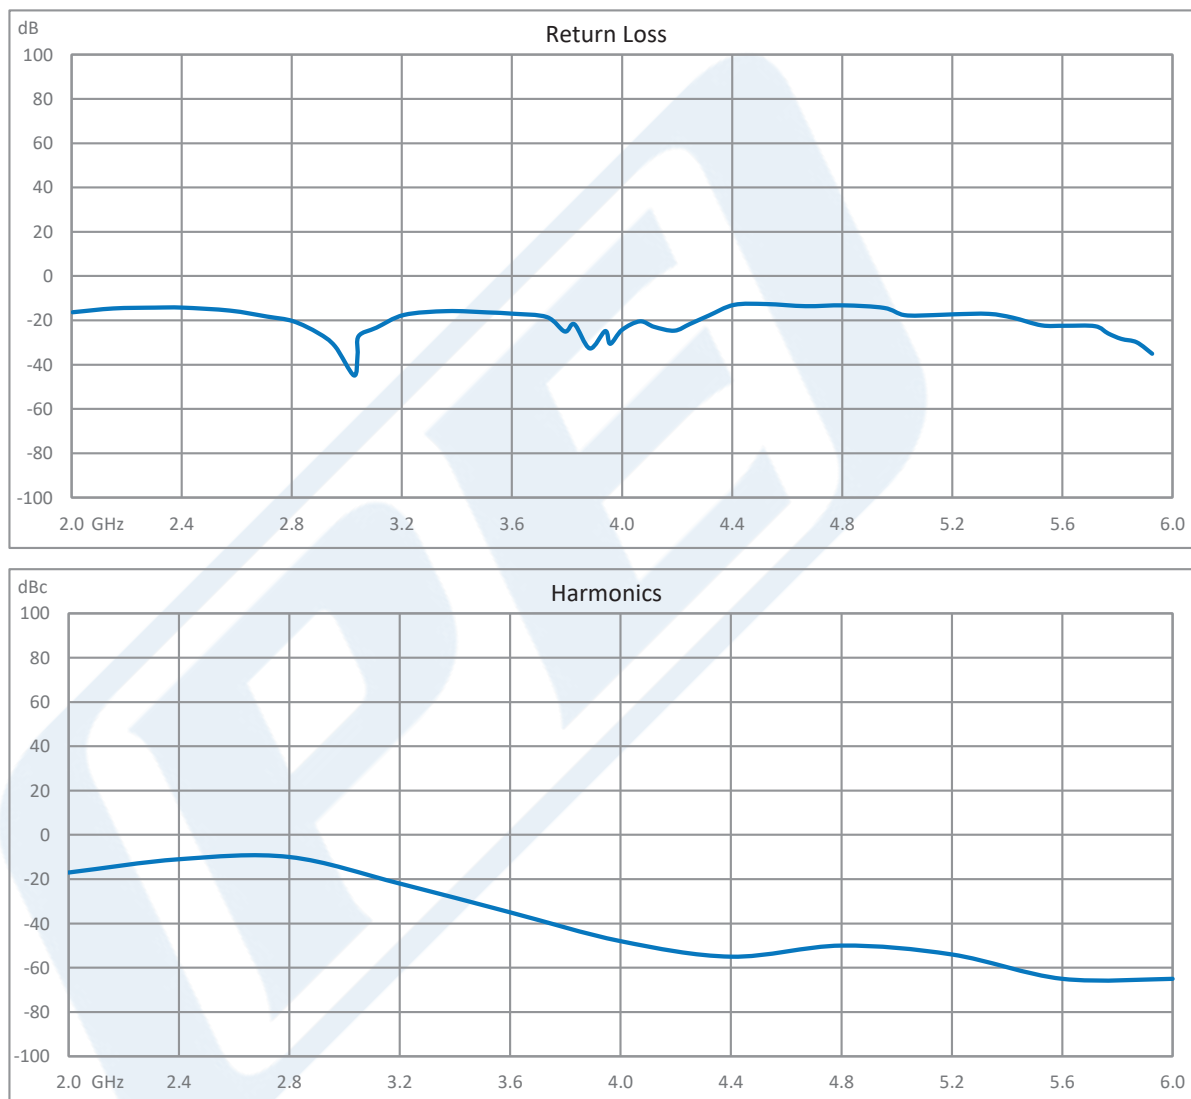

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High Power GaN Amplifier, SMA, Class AB PE15A5066](#)

43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High
Power GaN Amplifier, SMA, Class AB



TECHNICAL DATA SHEET

PE15A5066

43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High Power GaN Amplifier, SMA, Class AB from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High Power GaN Amplifier, SMA, Class AB PE15A5066](https://www.pasternack.com/6-ghz-high-power-amplifier-sma-pe15a5066-p.aspx)


URL: <https://www.pasternack.com/6-ghz-high-power-amplifier-sma-pe15a5066-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.


PE15A5066 CAD Drawing

43 dB Gain, 20 Watt Psat, 2 GHz to 6 GHz, High Power GaN Amplifier, SMA, Class AB

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/30/19	T.GALLA

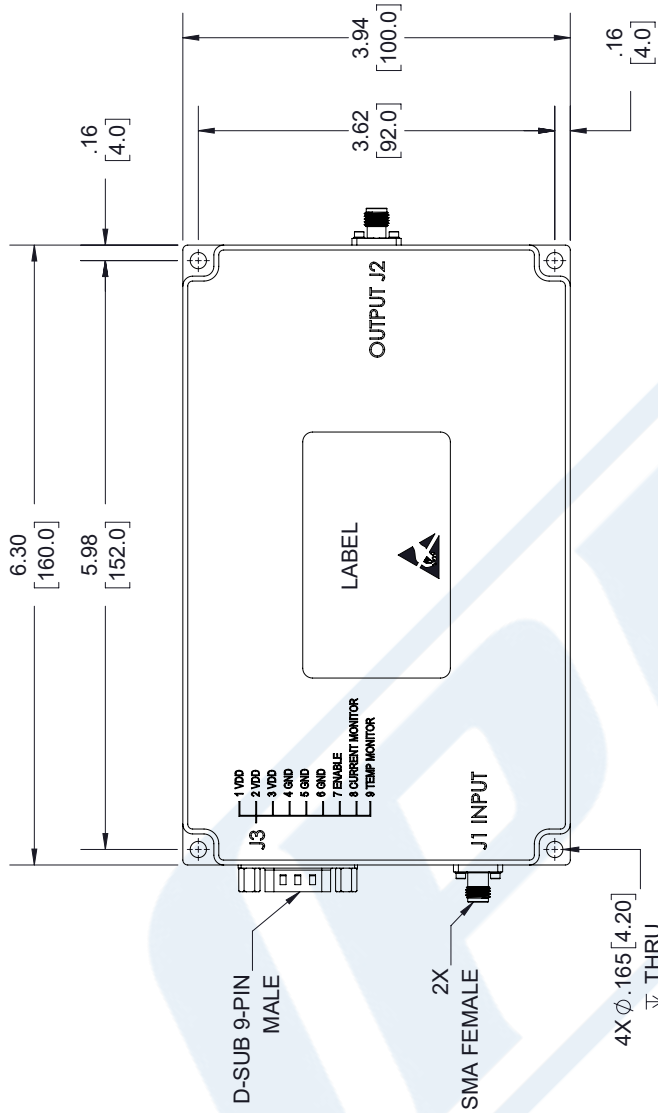

D-SUB 9-PIN, MALE		SPECIFICATIONS	
PIN #	DESCRIPTION		
1,2,3	VDD	28 VDC	
4,5,6	GND	Ground	
7	ENABLE	Amplifier Enable: TTL Logic High (3.3V) (Internally Pulled-Low)	
8	CURRENT MONITOR	Analog voltage relative to IDD @ 100mV per Ampere	
9	TEMP MONITOR	Analog voltage relative to Module's Temperature @ 10 mV/°C	



DETAIL A

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE IN INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X±.2 [5.08]
XX±.01 [.25]
XXX±.005 [0.13]

FRACTIONS
+1/32
-1/32

ANGLES ± 1°

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

THIRD-ANGLE PROJECTION

PE PASTERNAK
an INFINITI[®] brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
www.pasternack.com | e-mail: sales@pasternack.com

THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION.
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

SIZE A

CAGE 53919

DRAWN BY K.DANG

PART NUMBER PE15A5066

REV A

NOTES:


- ADEQUATE HEATSINK REQUIRED.

PE PASTERNAK
an INFINITI[®] brand

PE15A5066

S/N: XXXXX

LABEL:

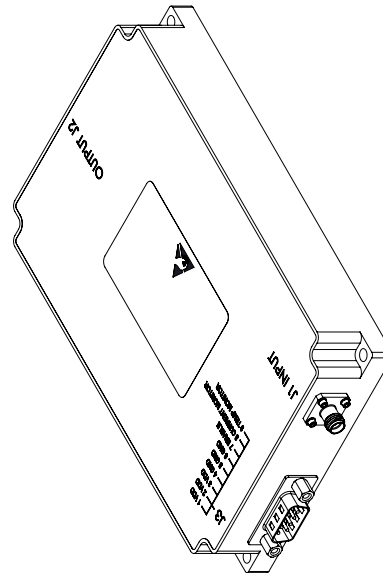

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.