



2.4 GHz 4 dBi Omnidirectional Antenna - N-Male Connector

Antennas Technical Data Sheet

PE51OM1024

Features

- High Performance in a compact lightweight design
- Durable UV-Stable fiberglass radome
- All weather operation
- Integral N-Male connector
- Optional magnetic mounts available

Applications

- 2.4 GHz ISM Band
- IEEE 802.11b, 802.11g and 802.11n Wireless LAN
- Public wireless hotspots
- WiFi Access Points
- Multipoint and mobile applications

Description

The HyperLink brand model PE51OM1024 is an economical yet high performance omnidirectional antenna designed for the 2.4 GHz ISM band. This compact and lightweight antenna is ideally suited for IEEE 802.11b, 802.11g and 802.11n wireless LANs, Bluetooth, public wireless hotspot application and other multipoint applications where wide coverage is desired.

Constructed for all weather operation, the PE51OM1024 features sealed collinear brass elements inside a durable UV-stable machine gray fiberglass radome. A vented end cap and drain holes in the base help prevent moisture build-up inside the antenna. These features allow the PE51OM1024 to be mounted in up or down positions.

The PE51OM1024 features an integral N-Male connector. This allows it to be mounted to various types of N-Female Bulkhead connectors and adapters as well as N-Female type magnetic mounts which are available separately or in kits with the PE51OM1024 antenna.

Configuration

Design	Omni
Band Type	Single
Radiation Pattern	Omni Directional
Polarization	Vertical
Connector Type	N Male
Number of Ports	1

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	2,400		2,500	MHz
Input VSWR			1.5:1	
Impedance		50		Ohms
Gain		4		dBi
Horizontal (Azimuth) Beam Width		Omnidirectional		
Vertical (Elevation) Beam Width		30		Degrees
Input Power			100	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4 GHz 4 dBi Omnidirectional Antenna - N-Male Connector PE51OM1024](#)



2.4 GHz 4 dBi Omnidirectional Antenna - N-Male Connector

Antennas Technical Data Sheet

PE510M1024

Mechanical Specifications

Radome Material

Fiberglass

Size

Base Diameter

1.2 in [30.48 mm]

Radome Diameter

0.75 in [19.05 mm]

Overall Length

7.9 in [200.66 mm]

Width

1.2 in [30.48 mm]

Height

1.2 in [30.48 mm]

Weight

0.8 lbs [362.87 g]

Environmental Specifications

Temperature


Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

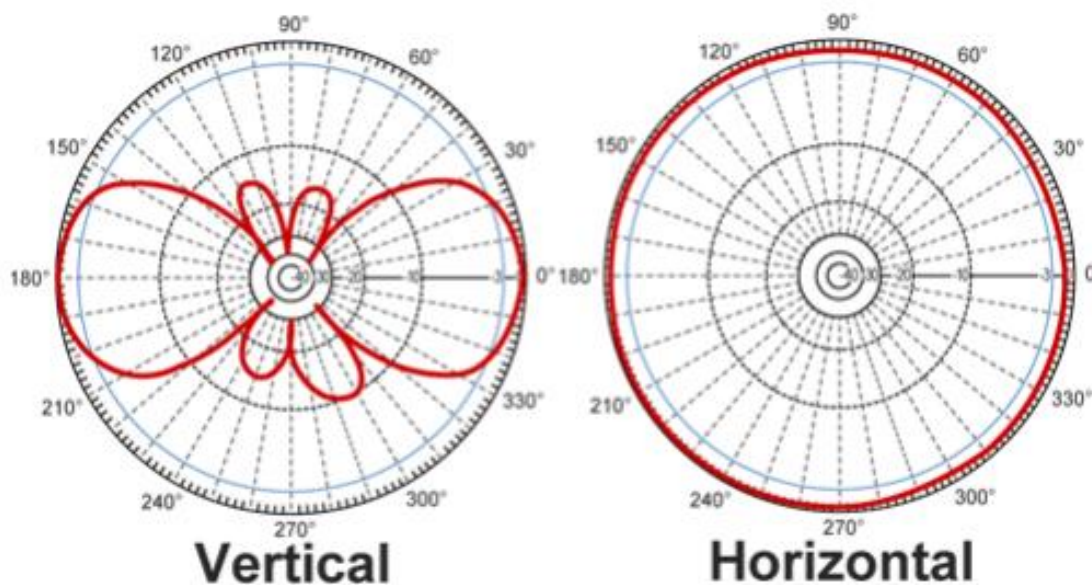

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4 GHz 4 dBi Omnidirectional Antenna - N-Male Connector PE510M1024](#)



2.4 GHz 4 dBi Omnidirectional Antenna - N-Male Connector

Antennas Technical Data Sheet

PE51OM1024

2.4 GHz 4 dBi Omnidirectional Antenna - N-Male Connector from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4 GHz 4 dBi Omnidirectional Antenna - N-Male Connector PE51OM1024](https://www.pasternack.com/single-antenna-4-dbi-gain-n-pe51om1024-p.aspx)

URL: <https://www.pasternack.com/single-antenna-4-dbi-gain-n-pe51om1024-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE51OM1024 CAD Drawing
2.4 GHz 4 dBi Omnidirectional Antenna - N-Male Connector

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/17/2020	M.MILLER

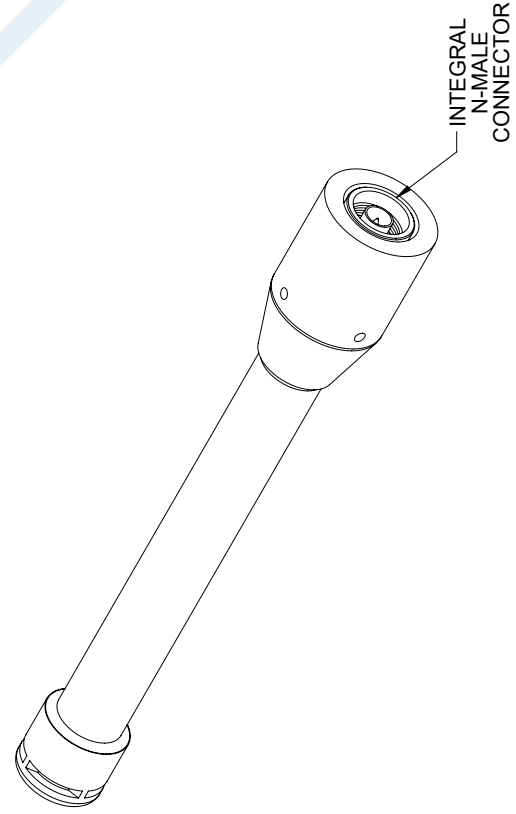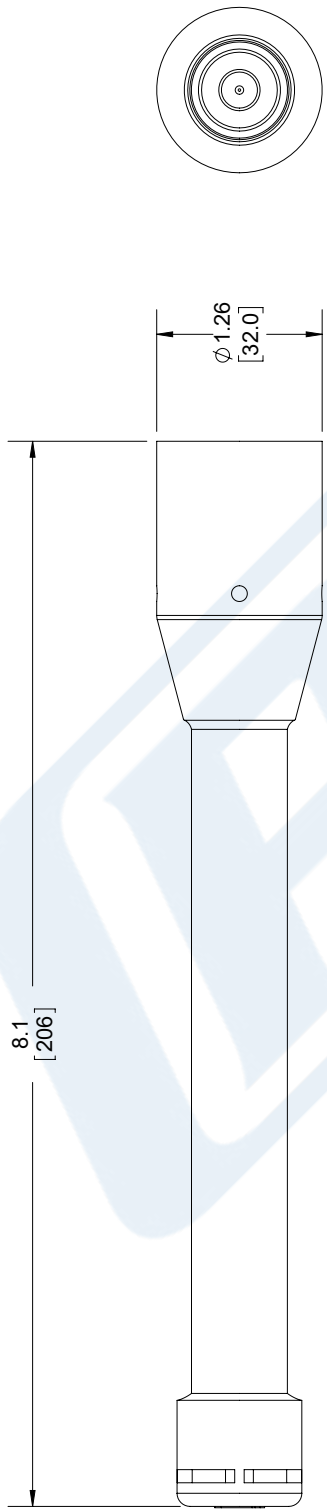

REGULATORY COMPLIANCE:
EU ROHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ± .2	[.08]	FRACTIONS
.XX = ± .02	[.51]	± 1/32
.XXX = ± .005	[.13]	ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305]	= +1 [25] / -0
12 [305] < L ≤ 60 [1524]	= +2 [51] / -0
60 [1524] < L ≤ 120 [3048]	= +4 [102] / -0
120 [3048] < L ≤ 300 [7620]	= +6 [152] / -0
300 [7620] < L	= +5% L / -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

PE PASTERNAK®
an INFINITI® brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

THIRD-ANGLE PROJECTION

THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	53919	K.DANG	PE51OM1024
			REV
			A