



2400-2500, 3300-3800, 5150-7125 MHz Flat Panel MIMO Antenna, 6 dBi Gain, 4 N Type Female Connectors

## Antennas Technical Data Sheet

**PEANFP1042**

### Features

- N Type Female Connector
- 4 x Vertical Polarization
- 4x4 MIMO Functionality
- Outdoor Rated Flat Panel Antenna
- 2.4 GHz, 3 GHz, 5 GHz, 6 GHz Wi-Fi Bands
- 6 dBi gain

### Applications

- Infotainment systems, Routers, Wi-Fi hotspots, HD video transmission, Gateways, Dash cameras, Public transportation
- Connected cars or self-driving cars, Fleet management, Logistics
- Public Safety Networks
- CBRS Networks
- Zigbee, Bluetooth, Wi-Fi

### Description

The PEANFP1042 Wi-Fi 6e Antenna from Pasternack's is a high performance directional antenna designed for the 2400 MHz to 7125 MHz bands and is available to ship same day. It is a UV protected, outdoor rated antenna with directional pattern. The PEANFP1042 is ideally suited for 802.11 protocols including 802.11ax as well as Zigbee, Bluetooth and is 4x4 MIMO capable.

The Pasternack's high performance PEANFP1042 is a rugged antenna providing broad coverage, low latency, increased network capacity and 6 dBi gain. This 4 port N Female directional antenna is suitable for commercial radios and access points in public and private networks that are equipped with N Type connectors.

This Wi-Fi 6e PEANFP1042 antenna with 4 N Female connectors, as well as our wide selection of superior quality RF parts, ships same day. Contact our knowledgeable and friendly technical support and sales staff for your answers on antennas or other Pasternack's products.

### Configuration

Design	Flat Panel
Application Band	Wi-Fi 6E
Band Type	Multi
Radiation Pattern	Directional
Polarization	Vertical
Cable Type	RG58/U
Cable Length	36 in [914.4 mm]
Connector Type	N Female
Number of Ports	4

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	2,400		7,125	MHz
Input VSWR			2:1	
Impedance		50		Ohms
Input Power			20	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2400-2500, 3300-3800, 5150-7125 MHz Flat Panel MIMO Antenna, 6 dBi Gain, 4 N Type Female Connectors PEANFP1042](#)



2400-2500, 3300-3800, 5150-7125 MHz Flat Panel MIMO  
Antenna, 6 dBi Gain, 4 N Type Female Connectors

## Antennas Technical Data Sheet

**PEANFP1042**

### Specifications by Band

Description	Band 1	Band 2	Band 3	Band 4	Band 5	Units
Range	2.4 to 2.5	3.3 to 3.8	5.15 to 7.125			GHz
Gain	6	6	6.5			dBi
Horizontal Beam Width	120	120	120			Degrees
Vertical Beam Width	60	60	55			Degrees

### Mechanical Specifications

Radome Material UV Resistant ABS

#### Size

Overall Length 11.41 in [289.81 mm]  
 Width 7.2 in [182.88 mm]  
 Height 2 in [50.8 mm]  
 Weight 4 lbs [1.81 kg]  
 Color White

### Environmental Specifications

#### Temperature

Operating Range -40 to +70 deg C  
 Wind Loading 124 MPH [199.56 KPH]  
 Humidity 5 to 95

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2400-2500, 3300-3800, 5150-7125 MHz Flat Panel MIMO Antenna, 6 dBi Gain, 4 N Type Female Connectors PEANFP1042](#)



2400-2500, 3300-3800, 5150-7125 MHz Flat Panel MIMO  
Antenna, 6 dBi Gain, 4 N Type Female Connectors

## Antennas Technical Data Sheet

**PEANFP1042**

2400-2500, 3300-3800, 5150-7125 MHz Flat Panel MIMO Antenna, 6 dBi Gain, 4 N Type Female Connectors from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2400-2500, 3300-3800, 5150-7125 MHz Flat Panel MIMO Antenna, 6 dBi Gain, 4 N Type Female Connectors PEANFP1042](https://www.pasternack.com/2400-2500-3300-3800-5150-7125-mhz-flat-panel-mimo-antenna-6-dbi-gain-4-n-type-female-connectors-peanfp1042)


URL: <https://www.pasternack.com/2400-2500-3300-3800-5150-7125-mhz-flat-panel-mimo-antenna-6-dbi-gain-4-n-type-female-connectors-peanfp1042-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PEANFP1042 CAD Drawing

2400-2500, 3300-3800, 5150-7125 MHz Flat Panel MIMO

Antenna, 6 dBi Gain, 4 N Type Female Connectors

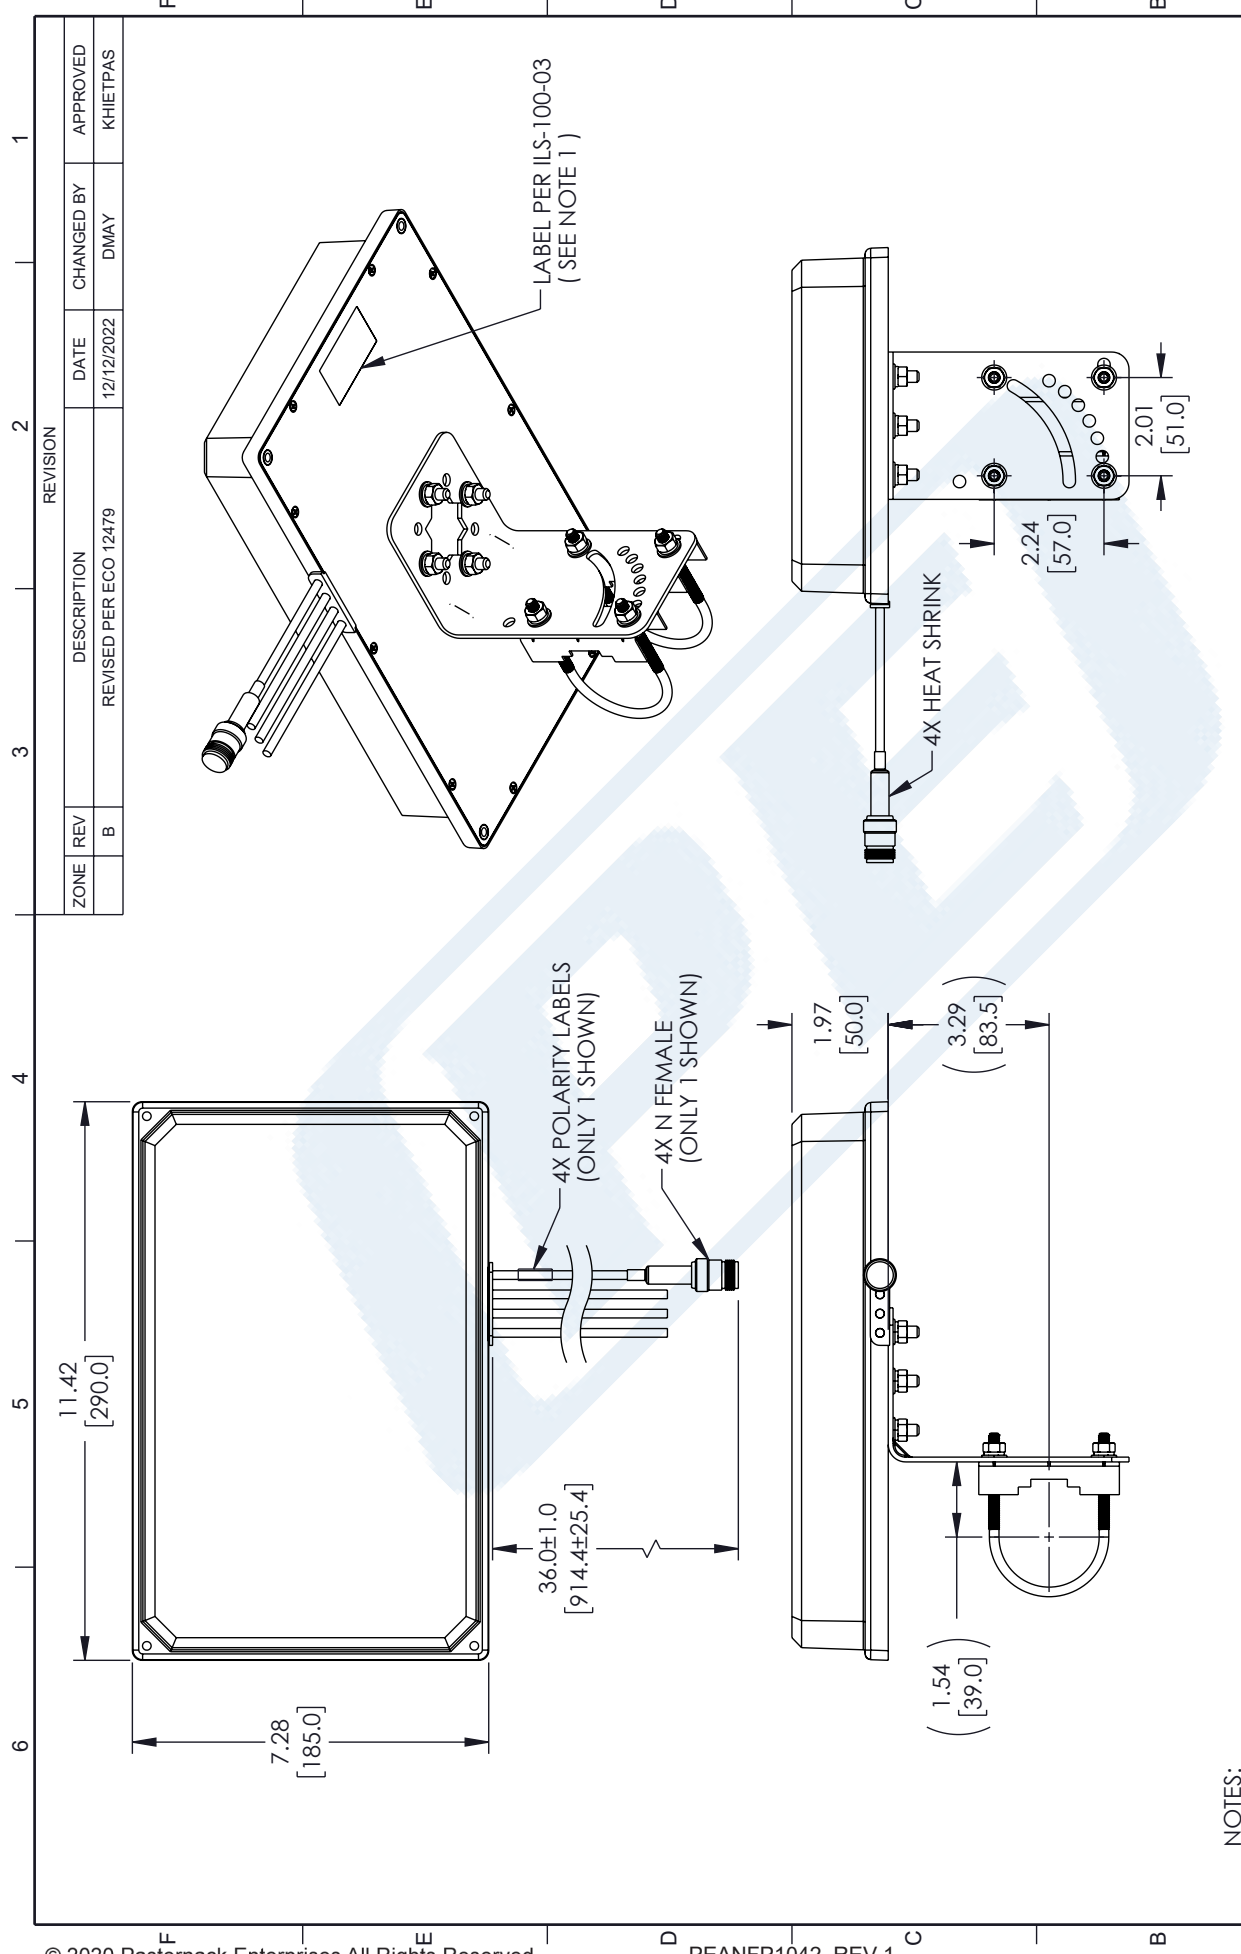

**NOTES:**

1. LABEL PER ILS-100-03 (FOR INTERNAL USE ONLY). LABEL LOCATION SHOWN IS APPROXIMATE.

**REGULATORY COMPLIANCE:**

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION).

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	REVISED PER ECO 12479	12/12/2022	DMAY	KHIETPAS

REVISION
1

<p><b>PE PASTERNAK</b> an INFINITI<sup>®</sup> brand</p>		<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p>
Website: <a href="http://www.Pasternack.com">www.Pasternack.com</a> Phone: 1.866.727.8376   1.949.261.1920		SCALE: NONE SHEET: 1 OF 1
DESCRIPTION: 2400-2500 / 3300-3800 / 5150-7125MHz 6 / 6 / 6.5 DBI 4 LEADS MIMO PANEL ANTENNA, POLE MOUNT, N FEMALE		
SIZE: A CAGE CODE: 53919 DRAWN BY: PSRINIVAS	ITEM NO.: PEANFP1042	REV: B

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS

**TOLERANCES:**

X = ±.2 [5] | FRACTIONS  
 XX = ±.02 [.5] | ± 1/32  
 XXX = ±.005 [.13] | ANGLES ± 1°

**CABLE LENGTH TOLERANCES:**

≤ 12 [305] = +1 [25] / -0  
 > 12 [305] ≤ 60 [1524] = +2 [51] / -0  
 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0  
 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0  
 > 300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE