

136 to 940 MHz Omni Antenna 2.5 dBi Gain,
NMO Connector, Stainless Steel



Antennas Technical Data Sheet

PEANOM1082

Features

- Vertically Polarized
- 2.5 dBi Gain
- NMO Connector
- Stainless Steel
- 1.5:1 VSWR Max
- 50 Watt Max Input Power
- Tunable Frequency

Applications

- Offroad/Overland Vehicles
- Mining/Industrial Heavy Equipment
- Commercial Trucking
- Fleet Management
- Farm Equipment

Description

Pasternack's PEANOM1082 is a vertical polarized antenna that ships same day from our ISO 9001:2015 certified facility. The antenna with 136 to 940 MHz frequency range has a maximum input VSWR of 1.5. This omni directional antenna has NMO male connectors.

This antenna is made of stainless steel, an overall length of 19.29 in, width of 2 in, and weighs 0.44 lbs. Pasternack's PEANOM1082 is a single band antenna operating from 136 to 940 MHz with 2.5 dBi gain.

Pasternack's experts are on hand to assist you with any inquiries. Order this PEANOM1082 antenna 7 days a week. 24 hours a day using our on-line ordering system with no MOQs (minimum order quantity) and same-day shipping.

Configuration

Band Type	Single
Radiation Pattern	Omni Directional
Polarization	Vertical
Connector Type	NMO

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range (Tunable)	136		940	MHz
Operational Bandwidth		5		MHz
Input VSWR			1.5:1	
Impedance		50		Ohms
Gain		2.5		dBi
Input Power			50	Watts


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [136 to 940 MHz Omni Antenna 2.5 dBi Gain, NMO Connector, Stainless Steel PEANOM1082](#)

136 to 940 MHz Omni Antenna 2.5 dBi Gain,
NMO Connector, Stainless Steel



Antennas Technical Data Sheet

PEANOM1082

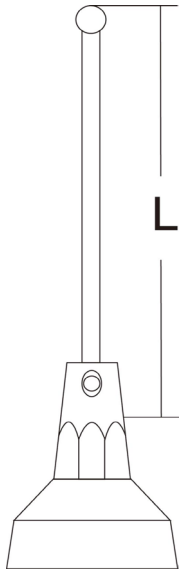

Frequency(MHz)	136	138	142	146	150	154	158	162	166
Length(mm)	521	490	476	458	447	434	423	408	395

Frequency(MHz)	170	174	200	210	220	230	240	250	260
Length(mm)	390	383	334	315	297	285	269	259	247

Frequency(MHz)	270	280	290	300	310	320	330	340	350
Length(mm)	238	227	219	208	203	195	185	180	174

Frequency(MHz)	360	370	380	390	400	410	420	430	440
Length(mm)	170	165	160	156	150	148	145	139	136

Frequency(MHz)	450	460	470	480	490	500	510	520	540
Length(mm)	133	128	125	120	115	112	108	107	105

Frequency(MHz)	570	600	630	680	690	720	750	780	800
Length(mm)	101	98	92	89	87	82	77	74	71

Frequency(MHz)	810	820	830	840	850	860	870	880	890
Length(mm)	68	66	65	64	62	61	60	59	58

Frequency(MHz)	900	910	920	930	940
Length(mm)	57	56	55	54	53

Mechanical Specifications

Radome Material

Stainless Steel

Size

Overall Length

19.29 in [489.97 mm]

Width

2 in [50.8 mm]

Height

2 in [50.8 mm]

Weight

0.44 lbs [199.58 g]

Environmental Specifications

Temperature

Operating Range

-40 to +80 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [136 to 940 MHz Omni Antenna 2.5 dBi Gain, NMO Connector, Stainless Steel PEANOM1082](#)

136 to 940 MHz Omni Antenna 2.5 dBi Gain,
NMO Connector, Stainless Steel



Antennas Technical Data Sheet

PEANOM1082

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

1: Loosen Screw, Sperate Whip and Base.

- 2: Find whip length of correct frequency according to cutting chart.
3: Measure the length of the steel whip and cut it from bottom side without cap.
4: Re-fix the steel whip and the base with screws.

136 to 940 MHz Omni Antenna 2.5 dBi Gain, NMO Connector, Stainless Steel from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [136 to 940 MHz Omni Antenna 2.5 dBi Gain, NMO Connector, Stainless Steel PEANOM1082](#)

URL: <https://www.pasternack.com/136-to-940-mhz-omni-antenna-2.5-dbi-gain-nmo-connector-stainless-steel-reflector-peanom1082-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEANOM1082 CAD Drawing

136 to 940 MHz Omni Antenna 2.5 dBi Gain, NMO Connector, Stainless Steel

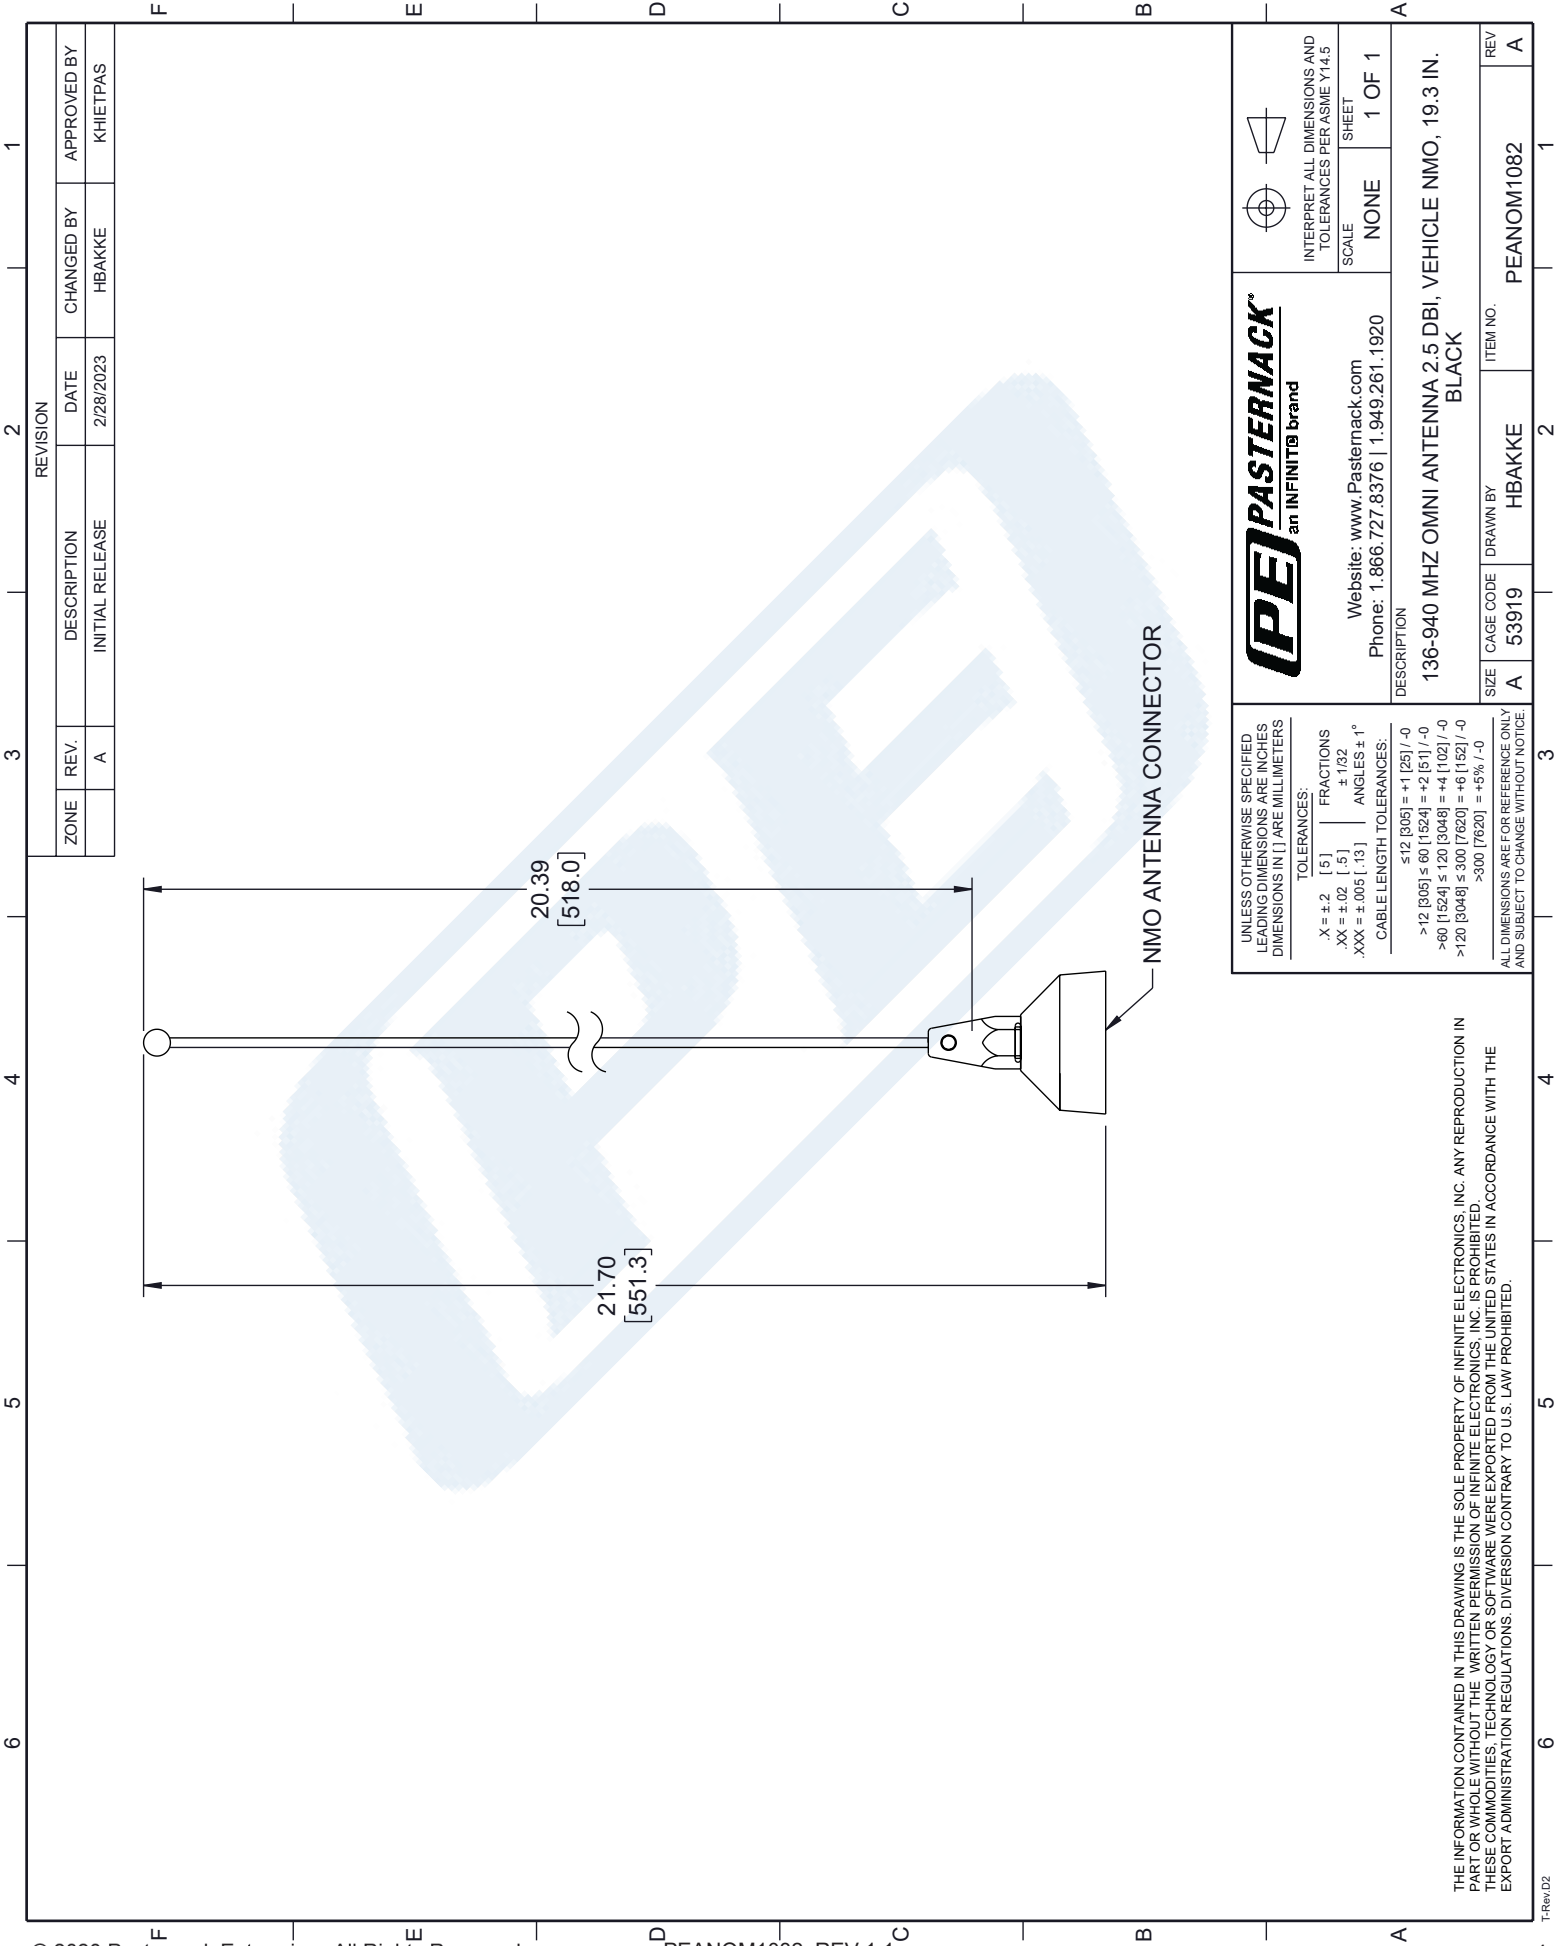

REVISION			
ZONE	REV.	DESCRIPTION	DATE
	A	INITIAL RELEASE	2/28/2023
		CHANGED BY	APPROVED BY
		HBAKKE	KHIETPAS

 PASTERNAK an INFINITO brand		 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920		SCALE	SHEET
DESCRIPTION		NONE	1 OF 1
136-940 MHZ OMNI ANTENNA 2.5 DBI, VEHICLE NMO, 19.3 IN. BLACK			
SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	53919	HBAKKE	PEANOM1082
			REV
			A

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = ±.2	[.5]	FRACTIONS	±.1/32
.XX = ±.02	[.5]	ANGLES	± 1°
.XXX = ±.005	[.13]	CABLE LENGTH TOLERANCES:	

≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.