

# 136-174 MHz Rubber Duck Antenna, 1.8 dBi gain, SMA Female Connector, Vertical Polarization



## Antennas Technical Data Sheet

## PEANRBD1020

### Features

- 136 MHz to 174 MHz, 1.8 dBi Gain
- SMA-Female connector
- Heliflex whip antenna
- Plug and play
- 50W power handling
- VSWR < 1.5:1
- Vertical polarization
- Black

### Applications

- PtP or PtMP applications
- Trunking for two-way radio comms
- VHF applications
- Public Safety / Emergency services
- Marine / Rail road communications
- P-25 applications exclusively supported
- Land mobile radio (LMR)
- Fixed and mobile services

### Description

Vertical polarized antenna PEANRBD1020 from Pasternack is part of our extensive in-stock omni directional antennas that ship the same day from our ISO 9001:2015 certified facility. The antenna with 136 to 174 MHz frequency range has a maximum input VSWR of 1.5:1. This omni directional antenna has SMA female connector.

This antenna has a black radome made of TPE, an overall length of 6.60 in, width of 0.50 in, and weighs 0.022 lbs. Pasternack's PEANRBD1020 is a single band antenna operating from 136 to 174 MHz with 1.8 dBi gain.

Pasternack's experts are on hand to assist you with any inquiries. Order this PEANRBD1020 antenna 7 days a week, 24 hours a day using our on-line ordering system with no MOQs (minimum order quantity) and same-day shipping.

### Configuration

Design	Rubber Duck
Band Type	Single
Radiation Pattern	Omni Directional
Polarization	Vertical
Connector Type	SMA Female

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	136		174	MHz
Input VSWR			1.5:1	
Impedance		50		Ohms
Gain		1.8		dBi
Input Power			50	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [136-174 MHz Rubber Duck Antenna, 1.8 dBi gain, SMA Female Connector, Vertical Polarization PEANRBD1020](#)

136-174 MHz Rubber Duck Antenna, 1.8 dBi gain,  
SMA Female Connector, Vertical Polarization



## Antennas Technical Data Sheet

**PEANRBD1020**

### Mechanical Specifications

Radome Material

TPE

#### Size

Overall Length

6.6 in [167.64 mm]

Width

0.5 in [12.7 mm]

Height

0.5 in [12.7 mm]

Weight

0.022 lbs [9.98 g]

### Environmental Specifications

#### Temperature

Operating Range

-40 to +80 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

136-174 MHz Rubber Duck Antenna, 1.8 dBi gain, SMA Female Connector, Vertical Polarization from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [136-174 MHz Rubber Duck Antenna, 1.8 dBi gain, SMA Female Connector, Vertical Polarization PEANRBD1020](#)

URL: <https://www.pasternack.com/1.8-dbi-rubber-duck-antenna-136-174-mhz-sma-female-connector-peanrbd1020-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEANRBD1020 CAD Drawing

136-174 MHz Rubber Duck Antenna, 1.8 dBi gain, SMA

Female Connector, Vertical Polarization

REVISION			
ZONE	REV.	DESCRIPTION	APPROVED BY
	A	INITIAL RELEASE	KHIETPAS

2

3

4

5

6

F


E

D

C

B

A

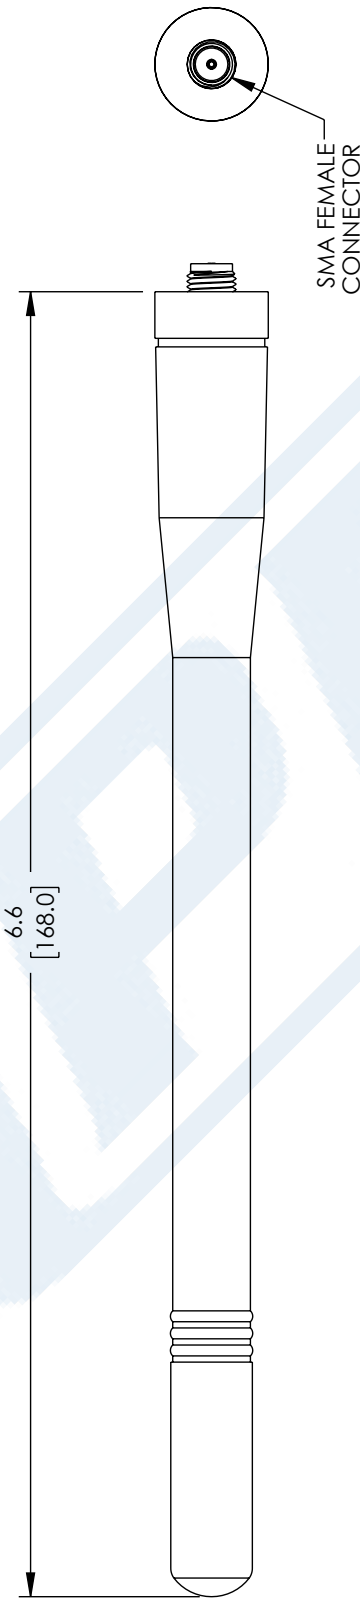

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
X = ±.2 [ 5 ]      FRACTIONS  
.XX = ±.02 [ .5 ]      ± 1/32  
.XXX = ±.005 [ .13 ]      ANGLES ± 1°  
CABLE LENGTH TOLERANCES:  
≤12 [305] = +1 [25] / -0  
>12 [305] ≤ 60 [1524] = +2 [51] / -0  
>60 [1524] ≤ 120 [3048] = +4 [102] / -0  
>120 [3048] ≤ 300 [7620] = +6 [152] / -0  
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
AND SUBJECT TO CHANGE WITHOUT NOTICE



Website: [www.Pasternack.com](http://www.Pasternack.com)  
Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION

136-174 MHz, Rubber duck Antenna, 1.8 dBi, with SMA-Female



INTERPRET ALL DIMENSIONS AND  
TOLERANCES PER ASME Y14.5  
SCALE NONE  
SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN  
PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.  
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE  
EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev.D2