



ANT-5GW-IPW2-NP

Outdoor Cellular Sub-6 5G Antenna

The ANT-5GW-IPW2-NP is an outdoor IP67-rated multiband dipole antenna for 5G New Radio, LTE, and cellular IoT (LTE-M, NB-IoT) applications.

The ANT-5GW-IPW2-NP provides a ground plane independent dipole antenna solution which mounts to metallic and non-metallic surfaces. The ANT-5GW-IPW2-NP housing is UV stabilized fiberglass and the antenna connects using an N plug (male pin) connector.

FEATURES

- Performance at 3300 MHz to 3800 MHz
 - VSWR: ≤ 1.9
 - Peak Gain: 0.5 dBi
 - Efficiency: 36%
- Performance at 2496 MHz to 2690 GHz
 - VSWR: ≤ 1.7
 - Peak Gain: 1.5 dBi
 - Efficiency: 40%
- Enhanced heat and chemical resistant UV stabilized fiberglass antenna housing material
- IP67 rated
- N plug (male pin) connector

APPLICATIONS

- Worldwide 5G/4G/3G/2G
- Cellular IoT: LTE-M (Cat-M1) and NB-IoT
- Private cellular networks
 - Citizens Broadband Radio Service (CBRS)
- 4.9 GHz Public Safety
- Emerging 5G C-Band applications
- Emerging 5G 2.5 GHz EBS applications

ORDERING INFORMATION

Part Number	Description
ANT-5GW-IPW2-NP	Outdoor cellular 5G antenna with N plug (male pin) connector

Available from Linx Technologies and select distributors and representatives.

TABLE 1. ELECTRICAL SPECIFICATIONS

Bands	Frequency Range	VSWR (max.)	Peak Gain (dBi)	Avg. Gain (dBi)	Efficiency (%)
71	617 MHz to 698 MHz	8.1	1.0	-2.8	54
12, 13, 14, 17, 26, 28, 29	698 MHz to 803 MHz	8.5	1.5	-2.7	56
5, 8, 20	791 MHz to 960 MHz	3.9	1.6	-2.7	56
1, 2, 3, 4, 25, 66	1710 MHz to 2200 MHz	2.4	1.2	-4.0	41
30, 40	2300 MHz to 2400 MHz	1.8	1.6	-4.0	40
7, 41	2496 MHz to 2690 MHz	1.7	1.5	-4.0	40
22, 42, 43, 48, 49, 52, n77, n78	3300 MHz to 3800 MHz	1.9	0.5	-7.5	36
CBRS	3550 MHz to 3700 MHz	1.6	2.4	-1.3	77
C-Band	3700 MHz to 4200 MHz	1.8	2.4	-2.0	68
n79	4400 MHz to 5000 MHz	2.7	3.7	-3.0	54

TABLE 2. MECHANICAL SPECIFICATIONS

Parameter	Value
Polarization	Linear
Radiation	Omnidirectional
Max Power	2 W
Wavelength	1/2-wave
Electrical Type	Dipole
Impedance	50 Ω
Connector Torque Recommended/Maximum	5 Nm/ 15 Nm
Operating Temperature Range	-30 °C to +70 °C
Weight	94.2 g (3.32 oz)
Dimensions	132.0 mm x Ø24.0 mm (5.20 in x Ø0.98 in)
Connection	N plug (male pin)
Ingress Protection Rating (IP)	IP67 rated
Antenna Color	White

Electrical specifications and plots measured with the antenna in a free space orientation.

PRODUCT DIMENSIONS

Figure 1 provides dimensions of the ANT-5GW-IPW2-NP antenna.

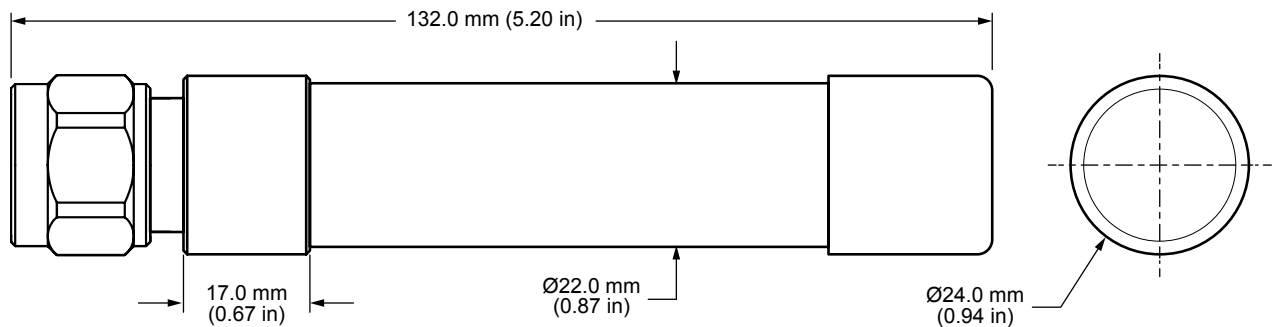


Figure 1. ANT-5GW-IPW2-NP Antenna Dimensions

PACKAGING INFORMATION

The ANT-5GW-IPW2-NP antenna is packaged in a clear plastic bag. Distribution channels may offer alternative packaging options.

IP (INGRESS PROTECTION) RATING


An ingress protection rating (IP rating) refers to the capability of a device to withstand the ingress of dust and/or water under specified conditions. IP rating is typically reserved for marketable product (device) rather than constituent components because design and assembly may affect performance of the device under testing. IP-rated antennas are designed to support the specified level of ingress protection and may be tested in a standalone configuration, however IP testing should be performed on the complete end product to ensure desired performance.

ANTENNA ORIENTATION

The ANT-5GW-IPW2-NP antenna is characterized in two antenna orientations as shown in Figure 2. The antenna free space orientation characterizes use of an antenna attached to an enclosure-mounted connector which is connected by cable to a printed circuit board. Although the antenna is a dipole not requiring a ground plane for function, characterization with an adjacent ground plane (102 mm x 102 mm) provides insight into antenna performance when attached directly to a connector on a metal enclosure. The two orientations represent the most common end-product use cases.



ANT-5GW-IPW2-NP in Free Space

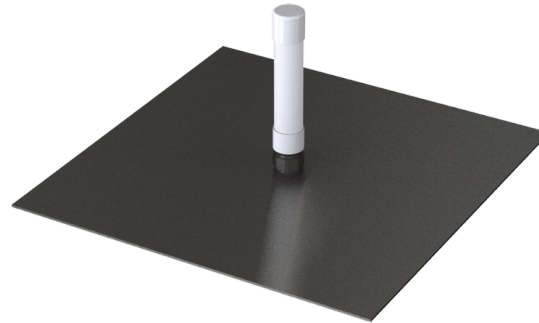

ANT-5GW-IPW2-NP at Center of 300 mm x 300 mm Ground Plane

Figure 2. ANT-5GW-IPW2-NP Test Orientations

FREE SPACE, NO GROUND PLANE

The charts on the following pages represent data taken with the antenna oriented in free space as shown in Figure 3.



Figure 3. ANT-5GW-IPW2-NP No Ground Plane (Free Space)

VSWR

Figure 4 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

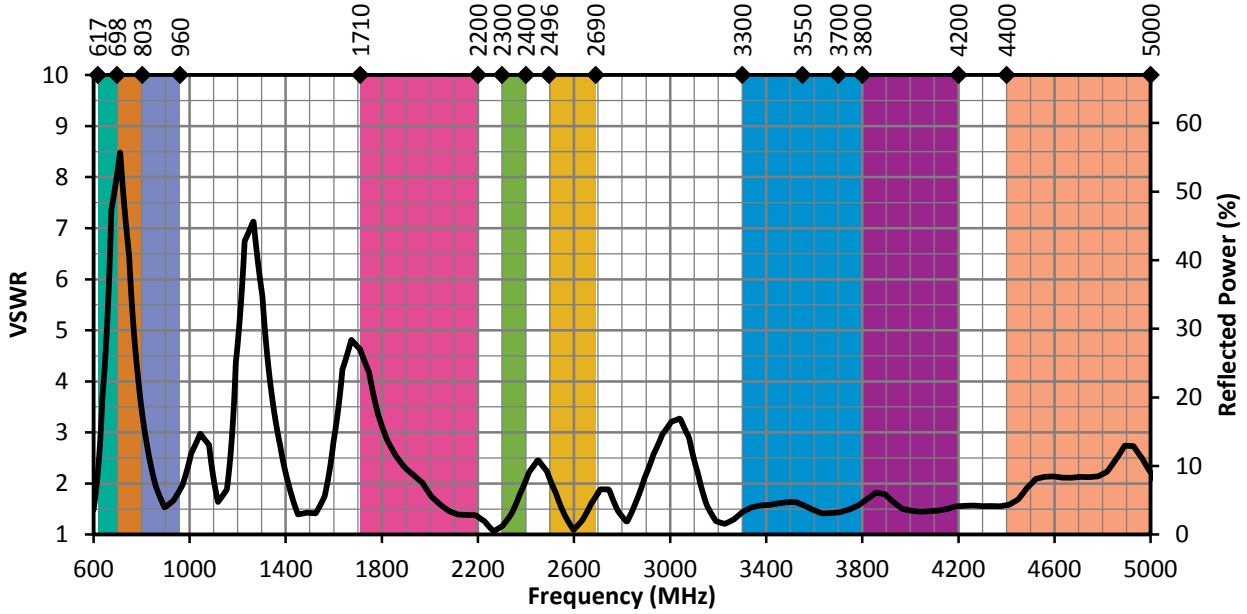


Figure 4. ANT-5GW-IPW2-NP VSWR, Free Space

RETURN LOSS

Return loss (Figure 5), represents the loss in power at the antenna due to reflected signals. Like VSWR, a lower return loss value indicates better antenna performance at a given frequency.

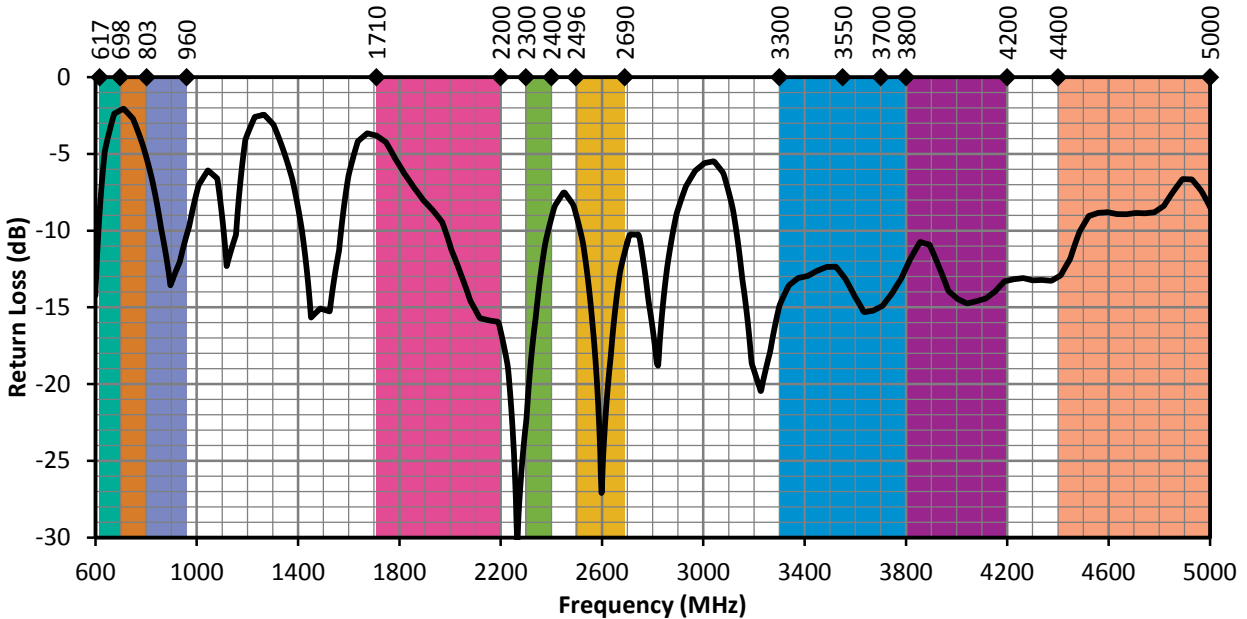


Figure 5. ANT-5GW-IPW2-NP Return Loss, Free Space

PEAK GAIN

The peak gain across the antenna bandwidth is shown in Figure 6. Peak gain represents the maximum antenna input power concentration across 3-dimensional space, and therefore peak performance at a given frequency, but does not consider any directionality in the gain pattern.

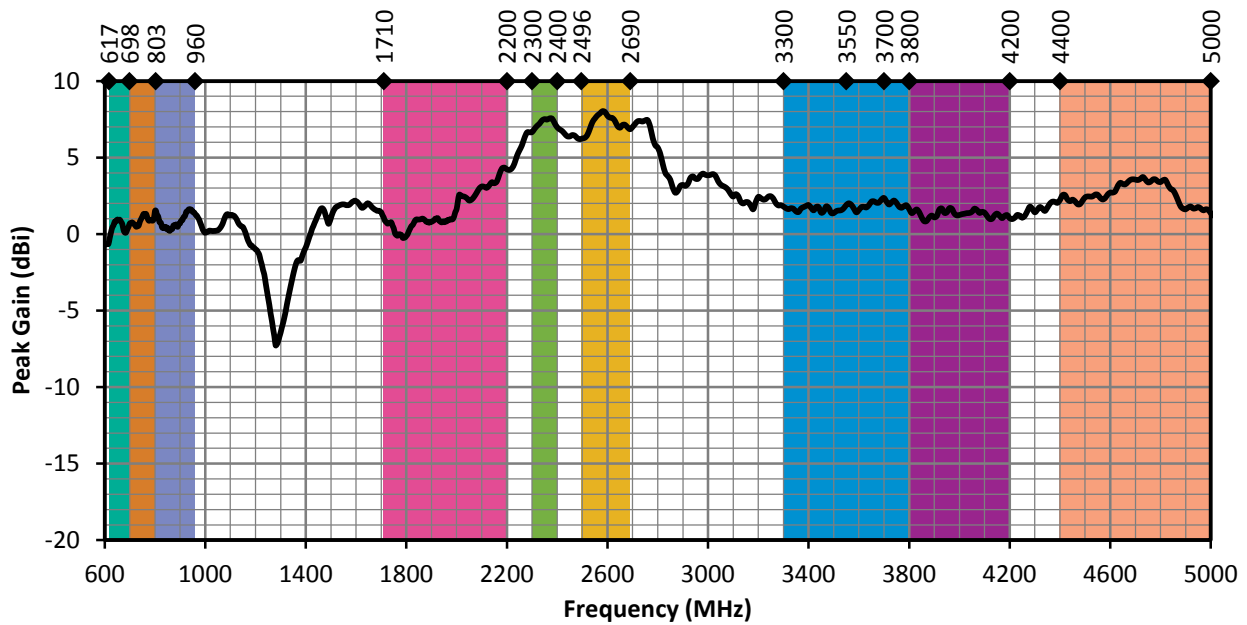


Figure 6. ANT-5GW-IPW2-NP Peak Gain, Free Space

AVERAGE GAIN

Average gain (Figure 7), is the average of all antenna gain in 3-dimensional space at each frequency, providing an indication of overall performance without expressing antenna directionality.

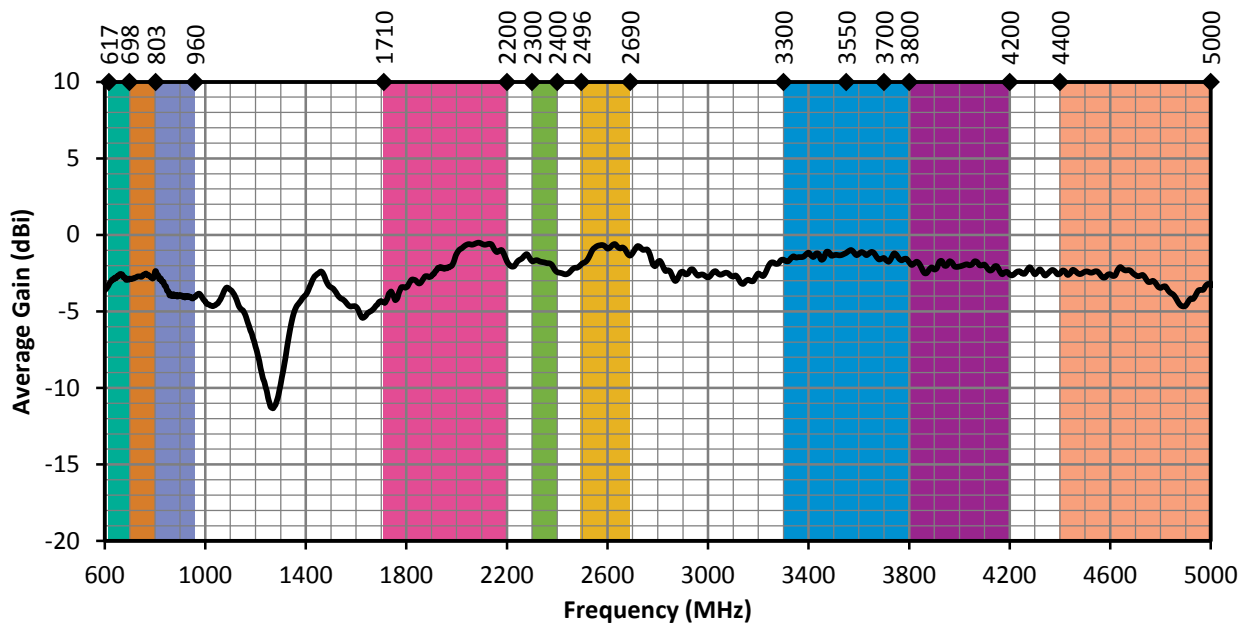


Figure 7. ANT-5GW-IPW2-NP Antenna Average Gain, Free Space

RADIATION EFFICIENCY

Radiation efficiency (Figure 8), shows the ratio of power delivered to the antenna relative to the power radiated at the antenna, expressed as a percentage, where a higher percentage indicates better performance at a given frequency.

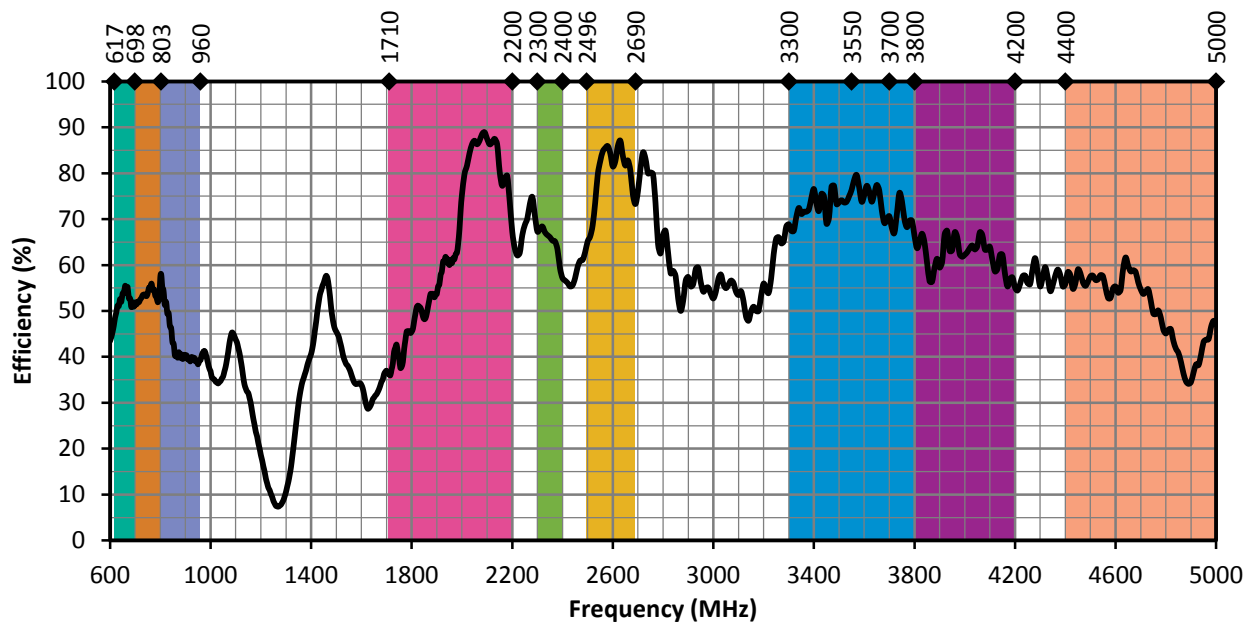


Figure 8. ANT-5GW-IPW2-NP Antenna Efficiency, Free Space




RADIATION PATTERNS

Radiation patterns provide information about the directionality and 3-dimensional gain performance of the antenna by plotting gain at specific frequencies in three orthogonal planes. Antenna radiation patterns for a free space orientation are shown in Figure 9 using polar plots covering 360 degrees. The antenna graphic at the top of the page provides reference to the plane of the column of plots below it. Note: when viewed with typical PDF viewing software, zooming into radiation patterns is possible to reveal fine detail.




RADIATION PATTERNS - FREE SPACE



617 MHz TO 698 MHz (660 MHz)

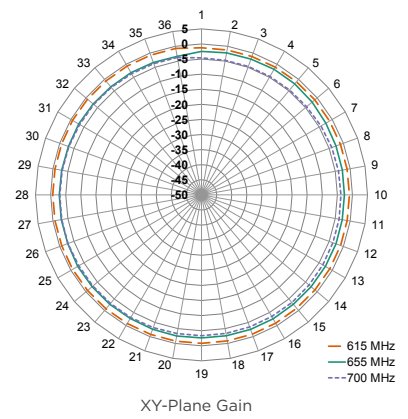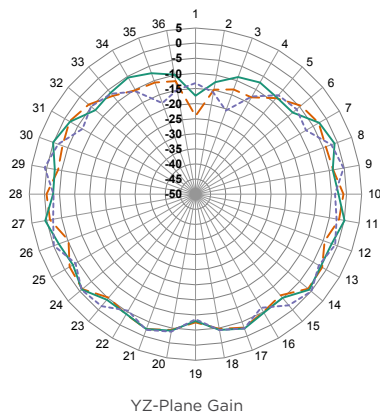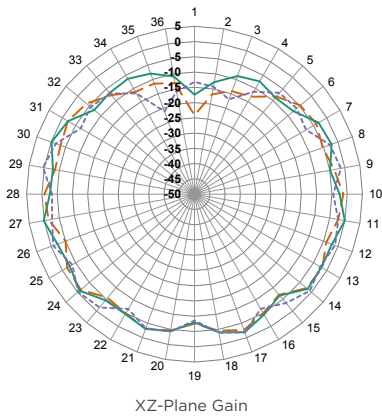


698 MHz TO 803 MHz (750 MHz)

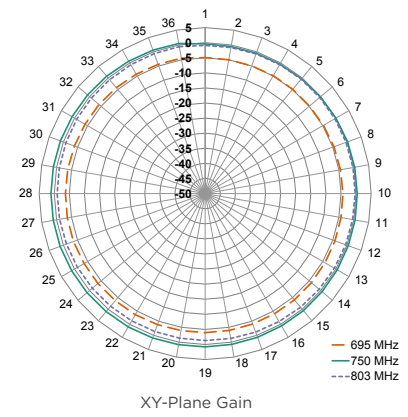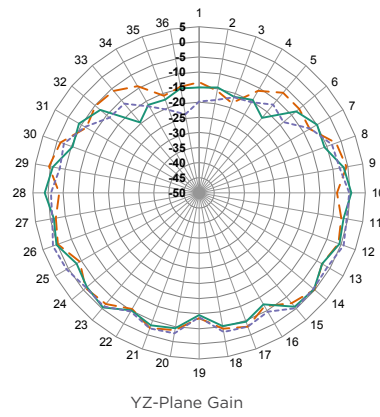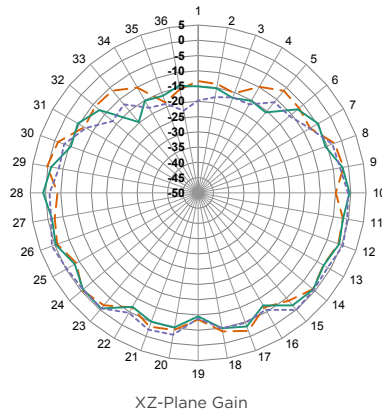


RADIATION PATTERNS - FREE SPACE


791 MHz TO 960 MHz (870 MHz)

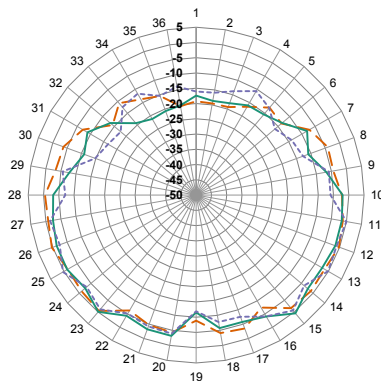

XZ-Plane Gain

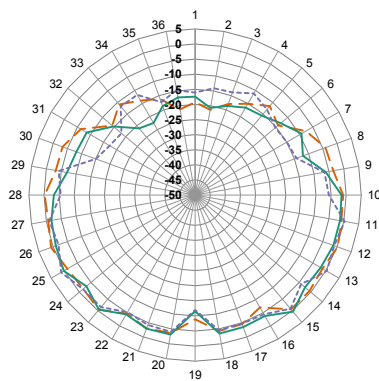


YZ-Plane Gain

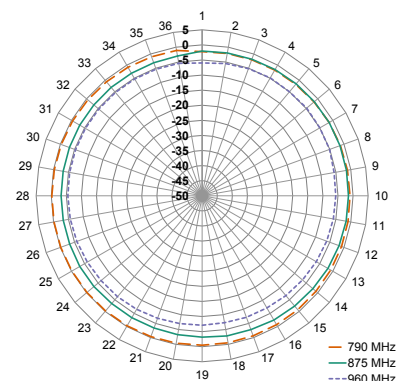


XY-Plane Gain


1710 MHz TO 2200 MHz (1950 MHz)

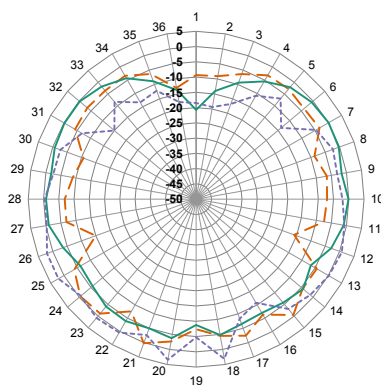

XZ-Plane Gain

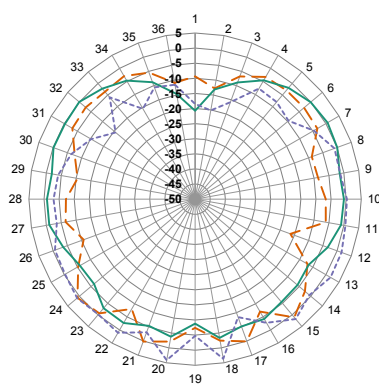


YZ-Plane Gain

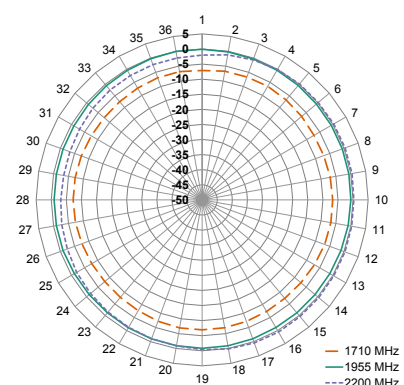


XY-Plane Gain


2300 MHz TO 2400 MHz (2350 MHz)

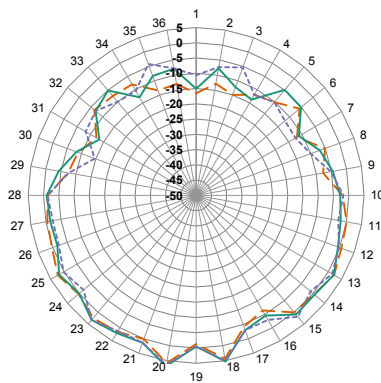

XZ-Plane Gain

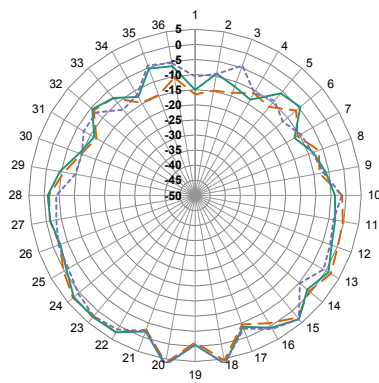


YZ-Plane Gain

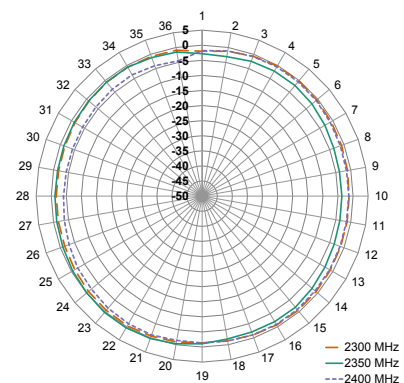


XY-Plane Gain

RADIATION PATTERNS - FREE SPACE


2496 MHz TO 2690 MHz (2600 MHz)

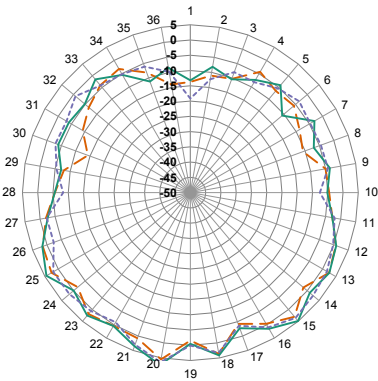

XZ-Plane Gain

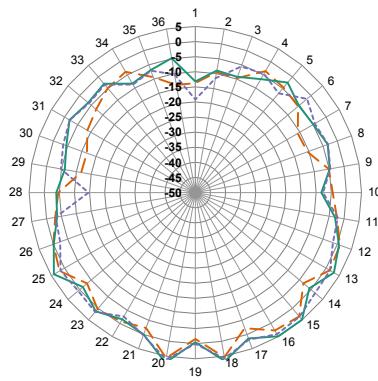


YZ-Plane Gain

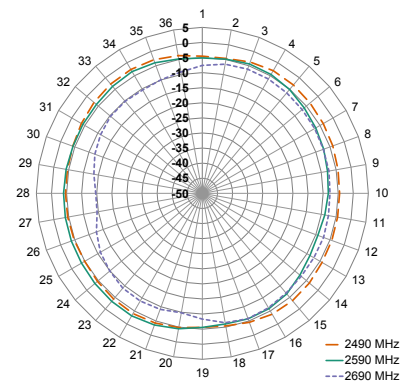


XY-Plane Gain

— 2490 MHz
— 2590 MHz
- - 2690 MHz


3300 MHz TO 3800 MHz (3550 MHz)

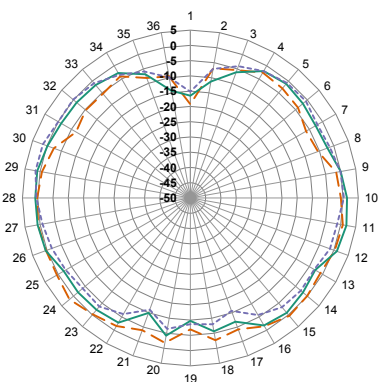

XZ-Plane Gain

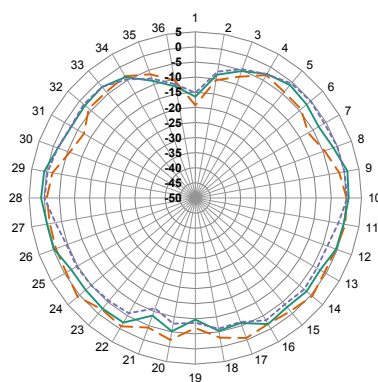


YZ-Plane Gain

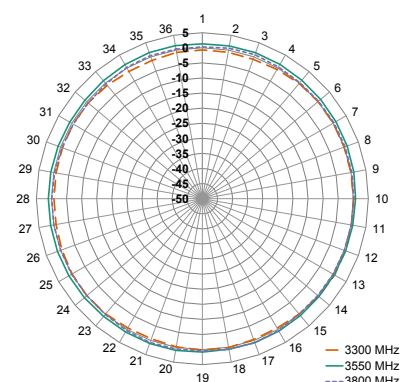


XY-Plane Gain

— 3300 MHz
— 3550 MHz
- - 3800 MHz


3550 MHz TO 3700 MHz (3620 MHz)

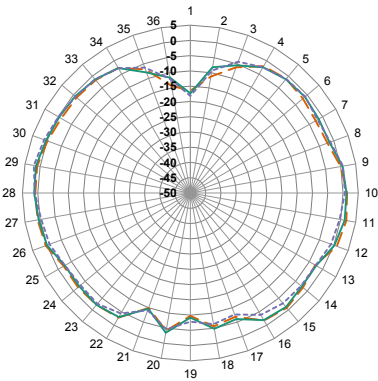

XZ-Plane Gain

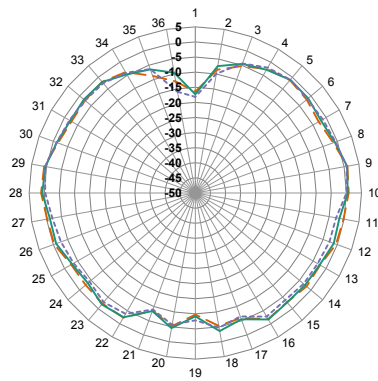

YZ-Plane Gain

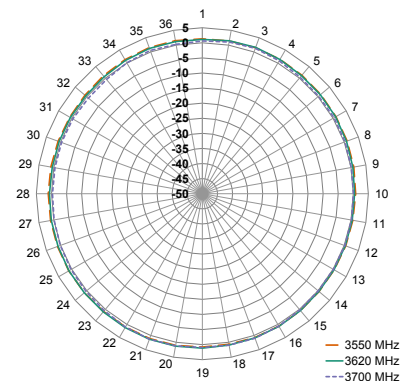


XY-Plane Gain

— 3550 MHz
— 3620 MHz
- - 3700 MHz

RADIATION PATTERNS - FREE SPACE

3700 MHz TO 4200 MHz (3950 MHz)

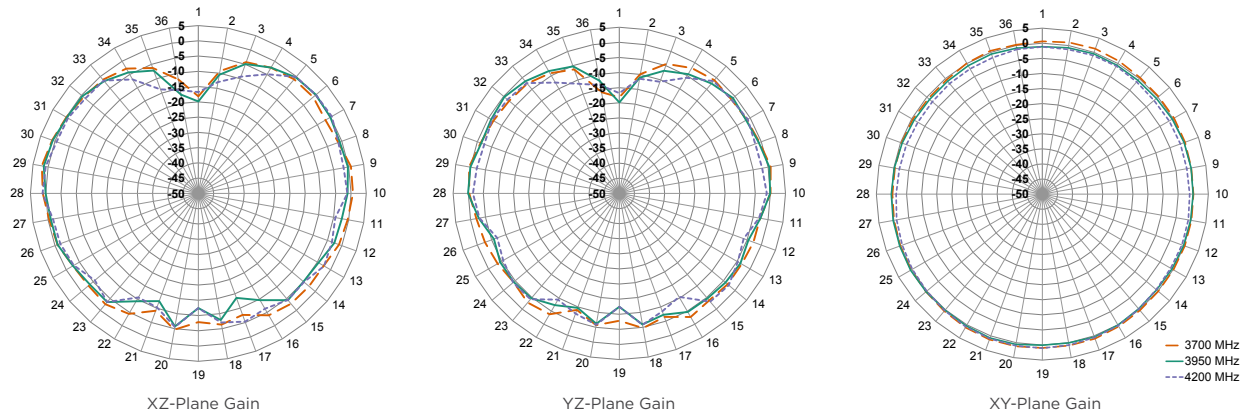

4400 MHz TO 5000 MHz (4700 MHz)

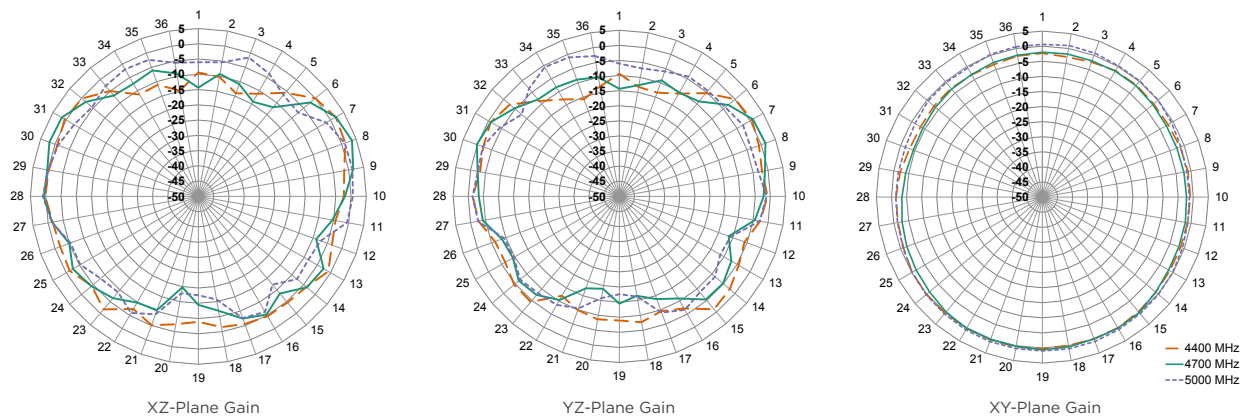


Figure 9. Radiation Patterns for ANT-5GW-IPW2-NP, Free Space

CENTER OF GROUND PLANE

The charts on the following pages represent data taken with the antenna oriented at the center of the 300 mm x 300 mm ground plane as shown in Figure 10.

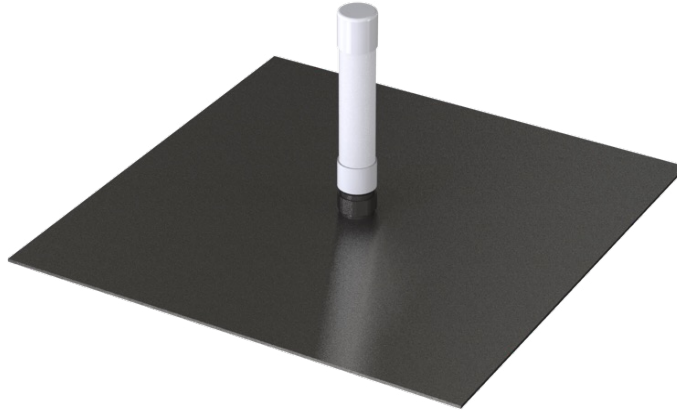


Figure 10. ANT-5GW-IPW2-NP at Center of Ground Plane

VSWR

Figure 11 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

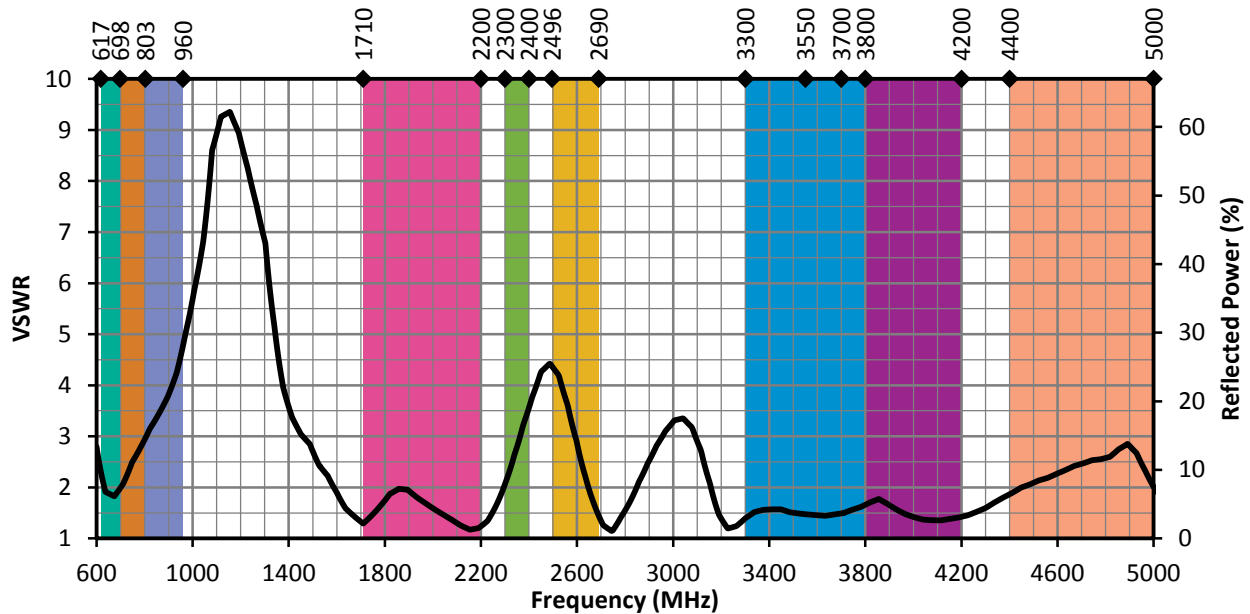


Figure 11. ANT-5GW-IPW2-NP VSWR, Center of Ground Plane

RETURN LOSS

Return loss (Figure 12), represents the loss in power at the antenna due to reflected signals. Like VSWR, a lower return loss value indicates better antenna performance at a given frequency.

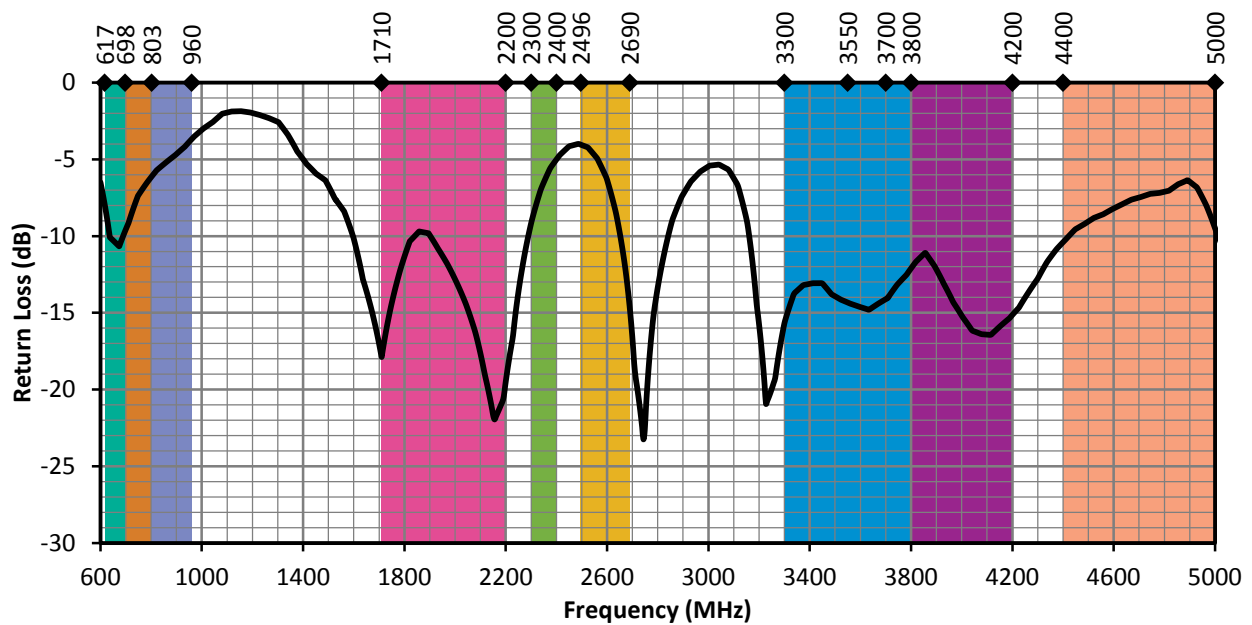


Figure 12. ANT-5GW-IPW2-NP Return Loss, Center of Ground Plane

PEAK GAIN

The peak gain across the antenna bandwidth is shown in Figure 13. Peak gain represents the maximum antenna input power concentration across 3-dimensional space, and therefore peak performance at a given frequency, but does not consider any directionality in the gain pattern.

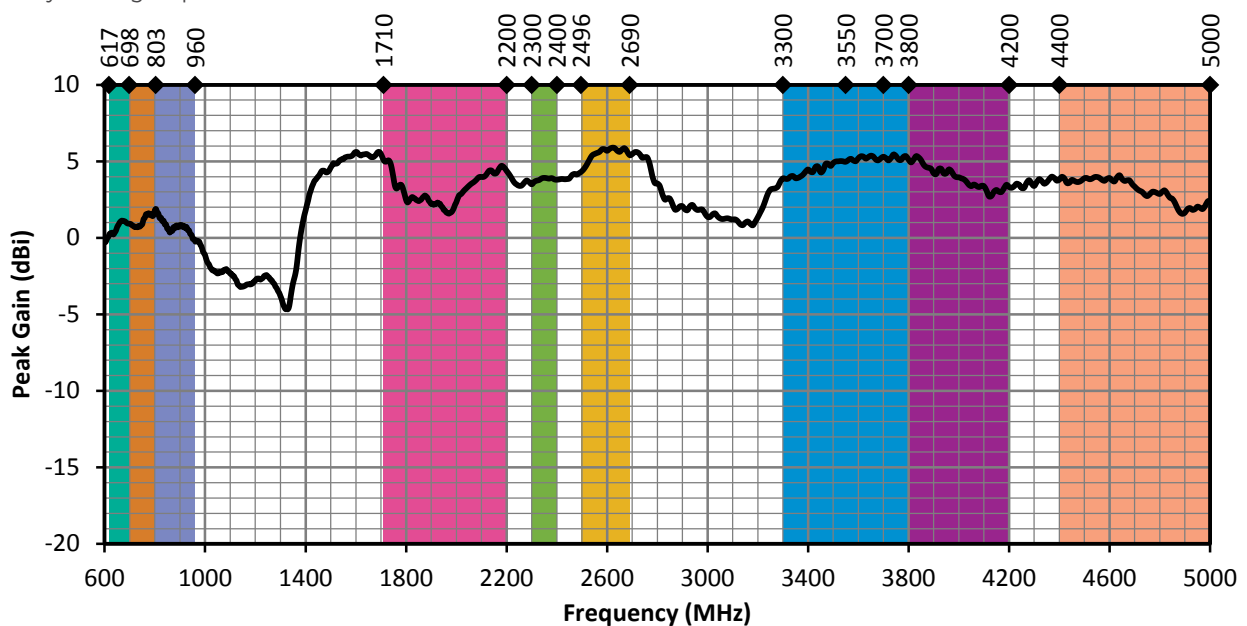


Figure 13. ANT-5GW-IPW2-NP Peak Gain, Center of Ground Plane

AVERAGE GAIN

Average gain (Figure 14), is the average of all antenna gain in 3-dimensional space at each frequency, providing an indication of overall performance without expressing antenna directionality.

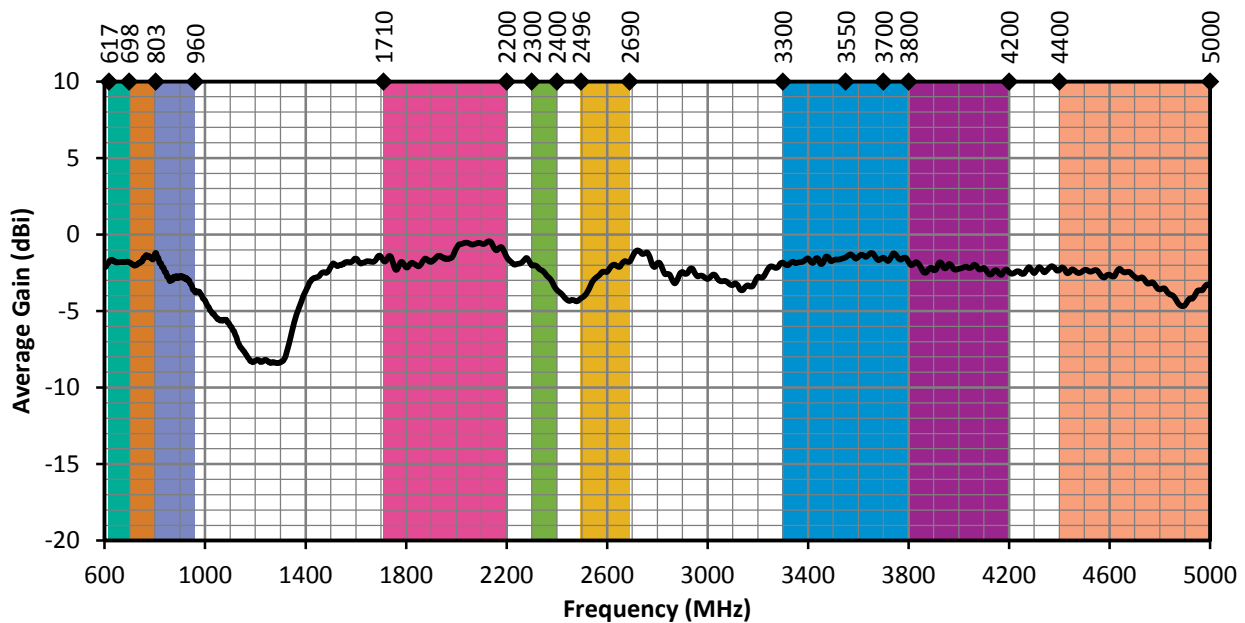


Figure 14. ANT-5GW-IPW2-NP Antenna Average Gain, Center of Ground Plane

RADIATION EFFICIENCY

Radiation efficiency (Figure 15), shows the ratio of power delivered to the antenna relative to the power radiated at the antenna, expressed as a percentage, where a higher percentage indicates better performance at a given frequency.


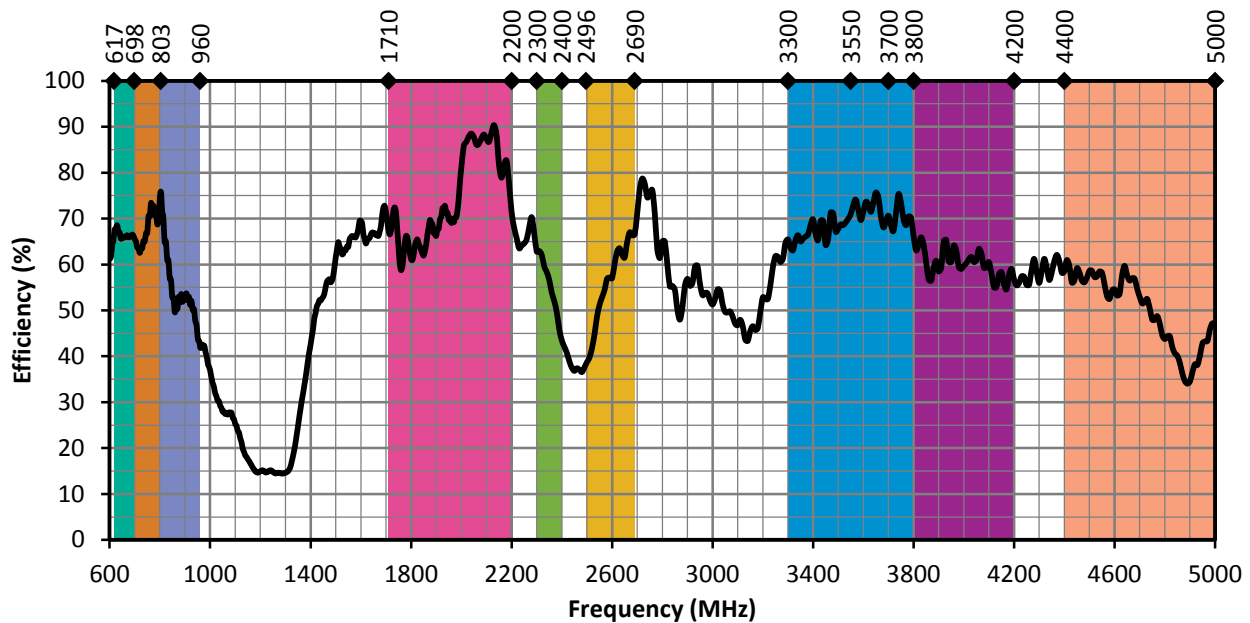


Figure 15. ANT-5GW-IPW2-NP Antenna Efficiency, Center of Ground Plane


RADIATION PATTERNS

Radiation patterns provide information about the directionality and 3-dimensional gain performance of the antenna by plotting gain at specific frequencies in three orthogonal planes. Antenna radiation patterns for an orientation at the center of the ground plane are shown in Figure 16 using polar plots covering 360 degrees. The antenna graphic at the top of the page provides reference to the plane of the column of plots below it. Note: when viewed with typical PDF viewing software, zooming into radiation patterns is possible to reveal fine detail.

RADIATION PATTERNS - CENTER OF GROUND PLANE

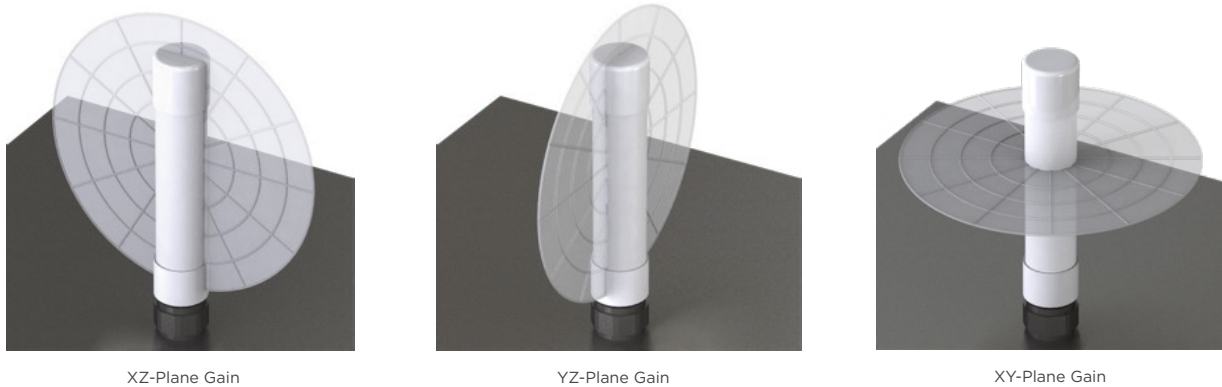

617 MHz TO 698 MHz (660 MHz)

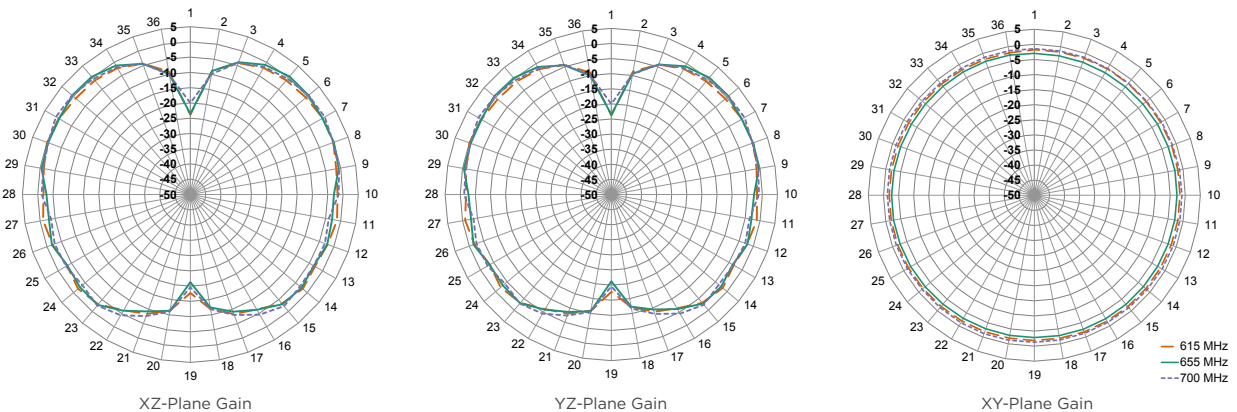

698 MHz TO 803 MHz (750 MHz)


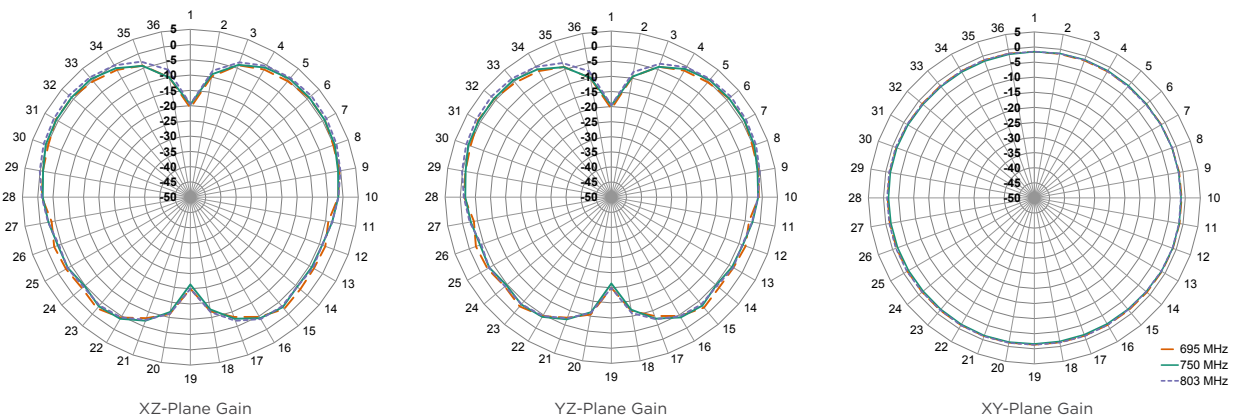



Figure 16. Radiation Patterns for ANT-8/9-IPW1-SMA, Straight

RADIATION PATTERNS - CENTER OF GROUND PLANE


791 MHz TO 960 MHz (870 MHz)

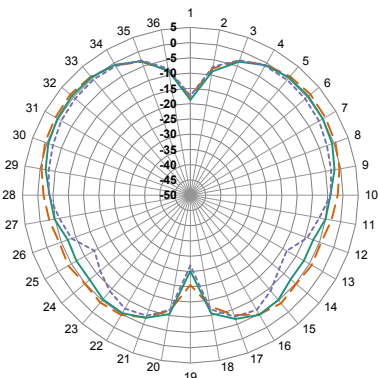

XZ-Plane Gain

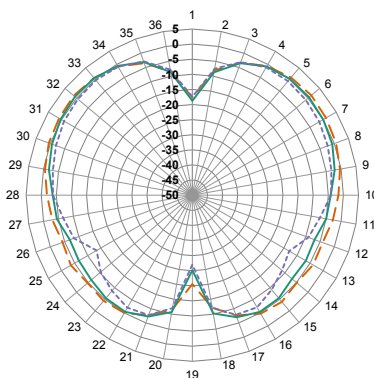


YZ-Plane Gain

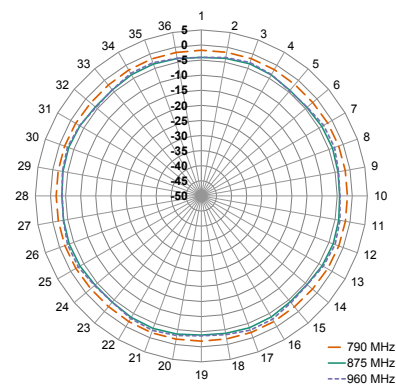


XY-Plane Gain


1710 MHz TO 2200 MHz (1950 MHz)

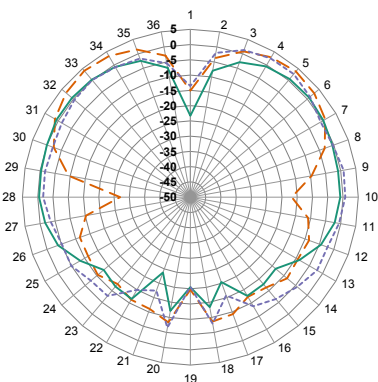

XZ-Plane Gain

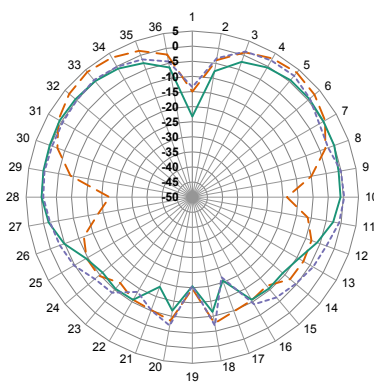


YZ-Plane Gain

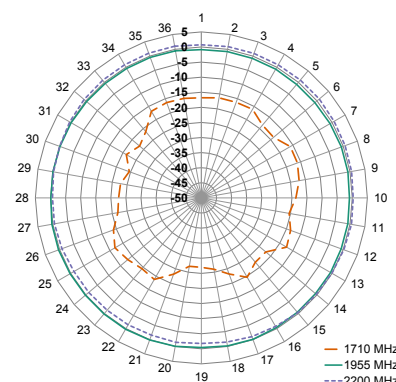


XY-Plane Gain


2300 MHz TO 2400 MHz (2350 MHz)

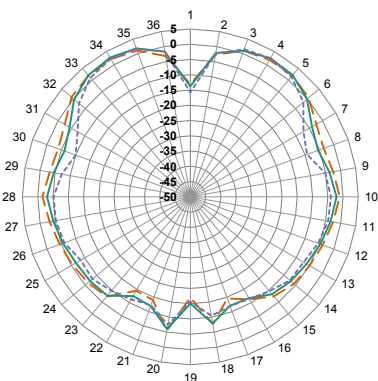

XZ-Plane Gain

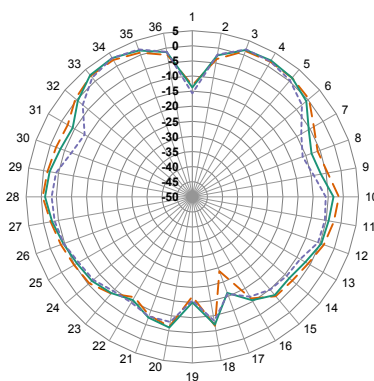


YZ-Plane Gain

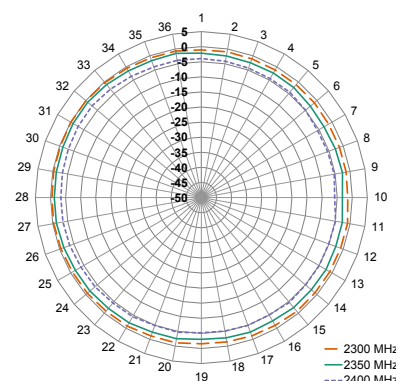


XY-Plane Gain

RADIATION PATTERNS - CENTER OF GROUND PLANE


2496 MHz TO 2690 MHz (3620 MHz)

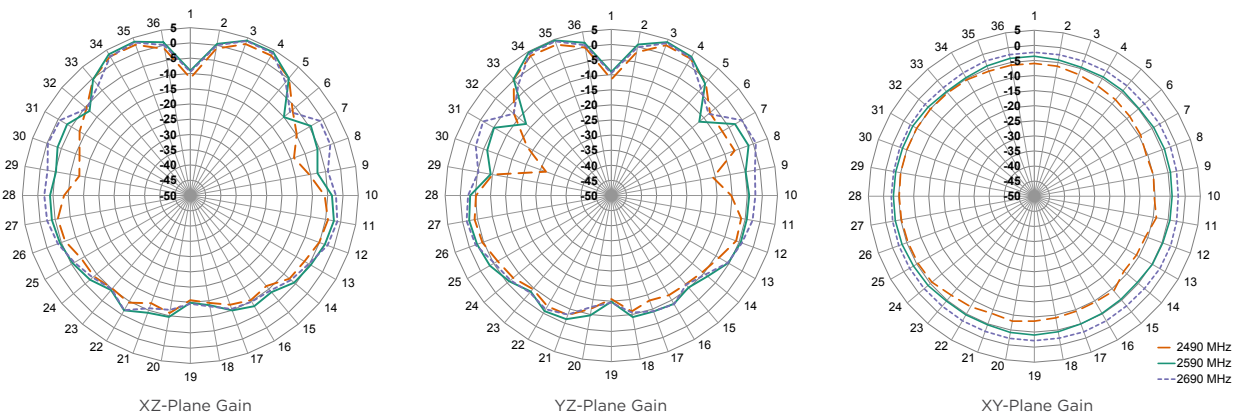

3300 MHz TO 3800 MHz (3550 MHz)

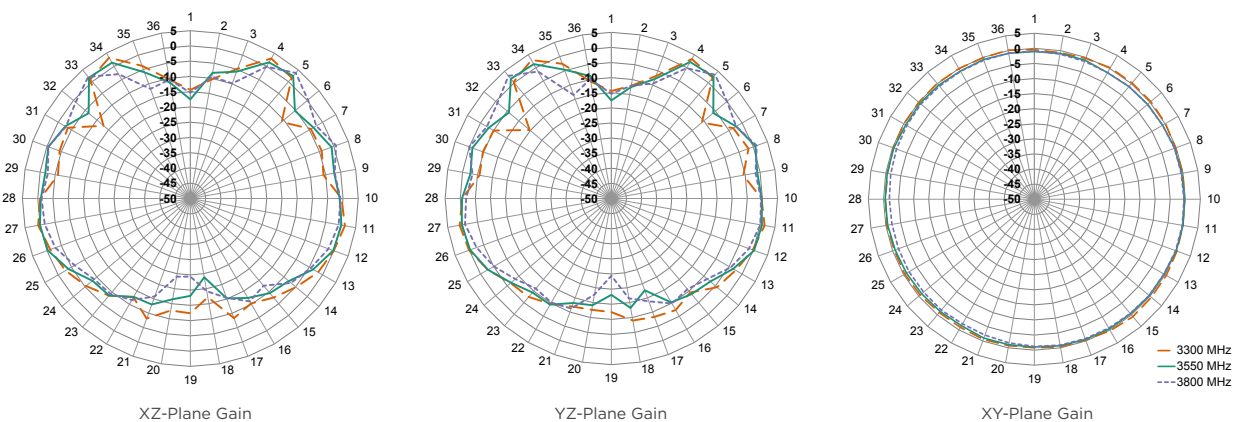


3550 MHz TO 3700 MHz (3620 MHz)

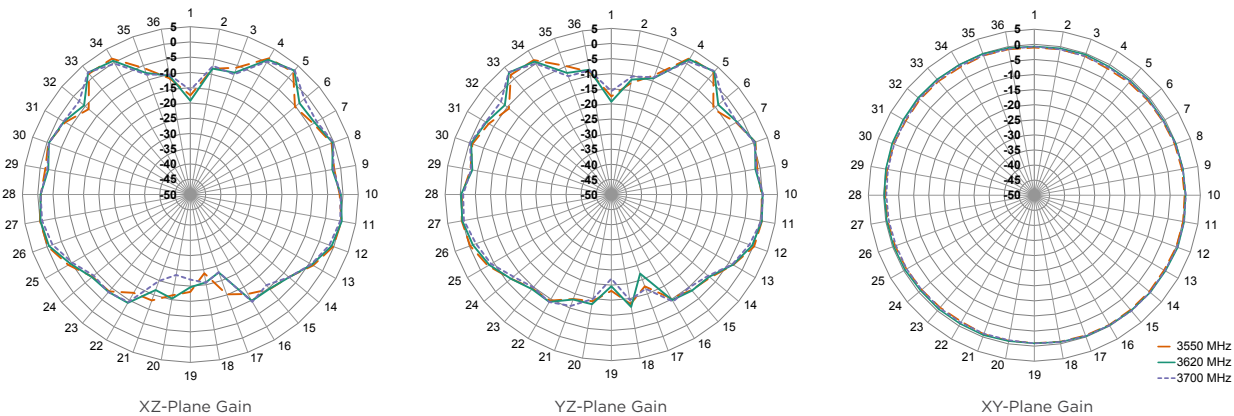

RADIATION PATTERNS - CENTER OF GROUND PLANE

3700 MHz TO 4200 MHz (3950 MHz)

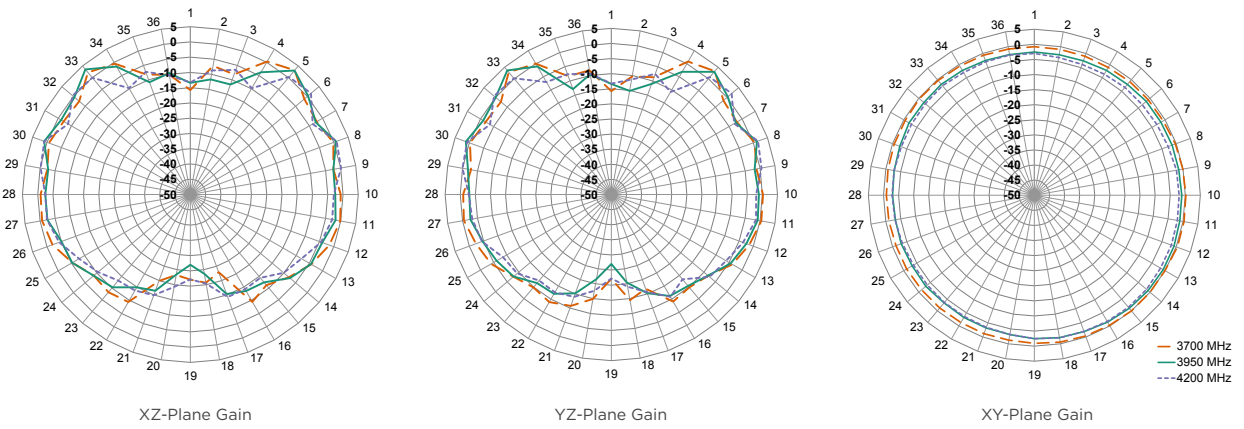

4400 MHz TO 5000 MHz (4700 MHz)

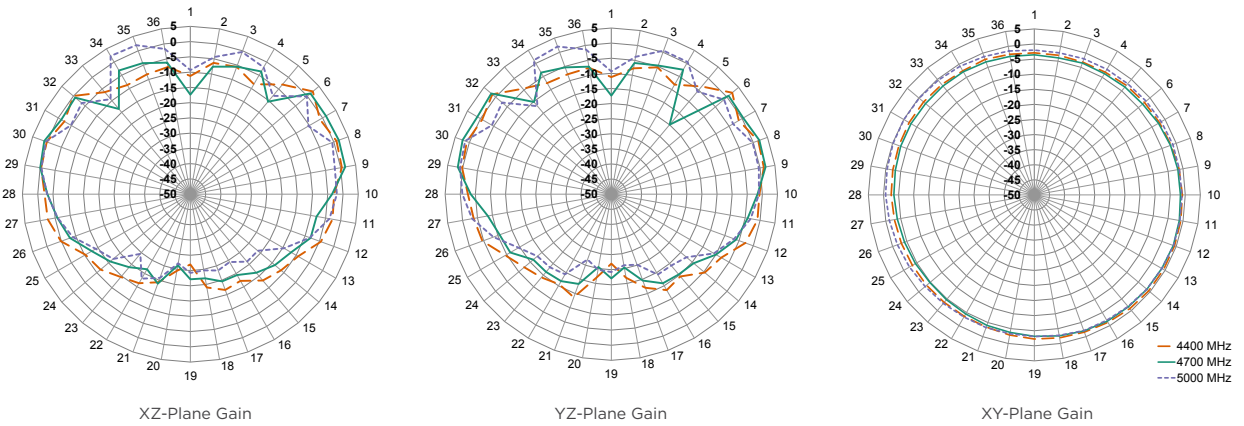


Figure 16. Radiation Patterns for ANT-5GW-IPW2-NP, Center of Ground Plane

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE Connectivity, TE, TE connectivity (logo), Linx and Linx Technologies are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

09/22 Original