



WR-75 Waveguide Isolator from 10 GHz to 15 GHz, 18 dB Typical Isolation, Cover Flange

Waveguide Isolators Technical Data Sheet

PEWIR1008

Features

- Waveguide Isolator
- WR-75
- Full M Band Frequency Range 10 to 15 GHz
- Mates with Cover Flange
- 1.3:1 VSWR
- 18 dB isolation across the full band

Applications

- Radar Systems
- Military
- Wireless Radio Systems
- Telecom Infrastructure
- Communication Systems
- R&D Labs
- Microwave Radio Systems

Description

The PEWIR1008 is a Waveguide Isolator offering 18 dB minimum isolation over the full M band frequency range of 10 to 15 GHz. The design achieves high isolation with wide band performance and the WR-75 waveguide uses compatible cover flanges on all ports and has a power rating of 10 watts (CW).

Pasternack offers a wide variety of isolators and waveguide isolators to fit your needs. These are two-port devices that transmit microwave or radio frequency power in one direction only and block the signal in the opposite direction. They can be thought of as a diode for RF energy. Isolators are used to isolate equipment from the effects of conditions outside of the equipment. For instance they are used to prevent a microwave source being detuned by a mismatched load. Pasternack's waveguide isolators feature excellent insertion loss, full WR band high isolation and reliability.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	10		15	GHz
Circulator				
VSWR		1.3:1		
Insertion Loss		0.5		dB
Isolation		18		dB
Forward Power (CW)			10	Watts
Input Power (Peak)			5	KWatts
Termination				
VSWR			1.05:1	
Input Power (CW)			2	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-75 Waveguide Isolator from 10 GHz to 15 GHz, 18 dB Typical Isolation, Cover Flange PEWIR1008](#)



WR-75 Waveguide Isolator from 10 GHz to 15 GHz,
18 dB Typical Isolation, Cover Flange

Waveguide Isolators Technical Data Sheet

PEWIR1008

Mechanical Specifications

Size

Configuration

Waveguide Size

WR-75

Flange Type

Cover

Body Material and Plating

Aluminum

Environmental Specifications

Temperature

Operating Range


-10 to 65 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

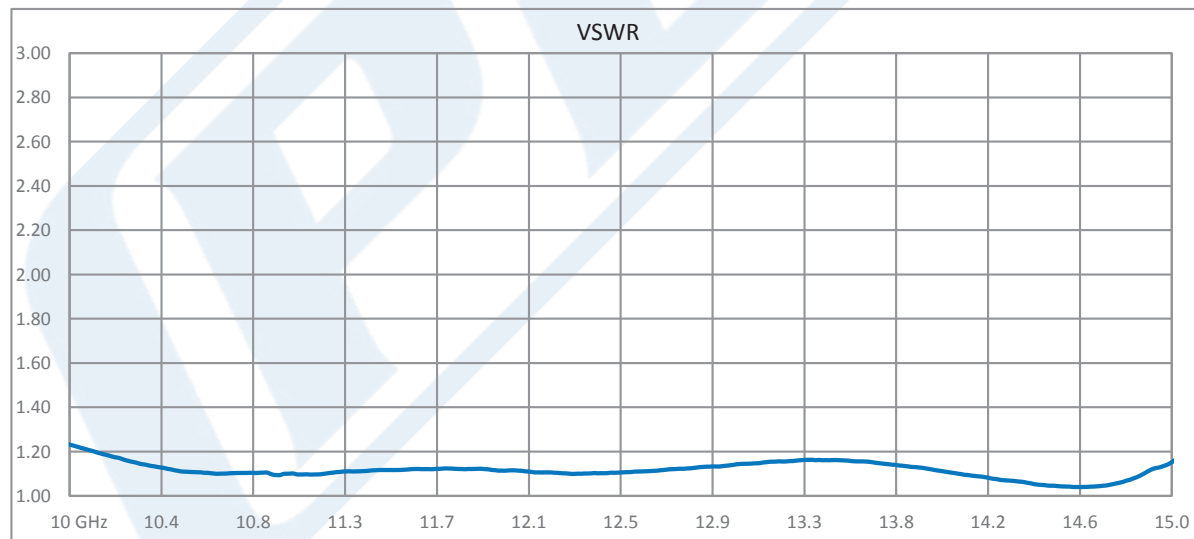


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-75 Waveguide Isolator from 10 GHz to 15 GHz, 18 dB Typical Isolation, Cover Flange PEWIR1008](#)



WR-75 Waveguide Isolator from 10 GHz to 15 GHz,
18 dB Typical Isolation, Cover Flange

Waveguide Isolators Technical Data Sheet

PEWIR1008

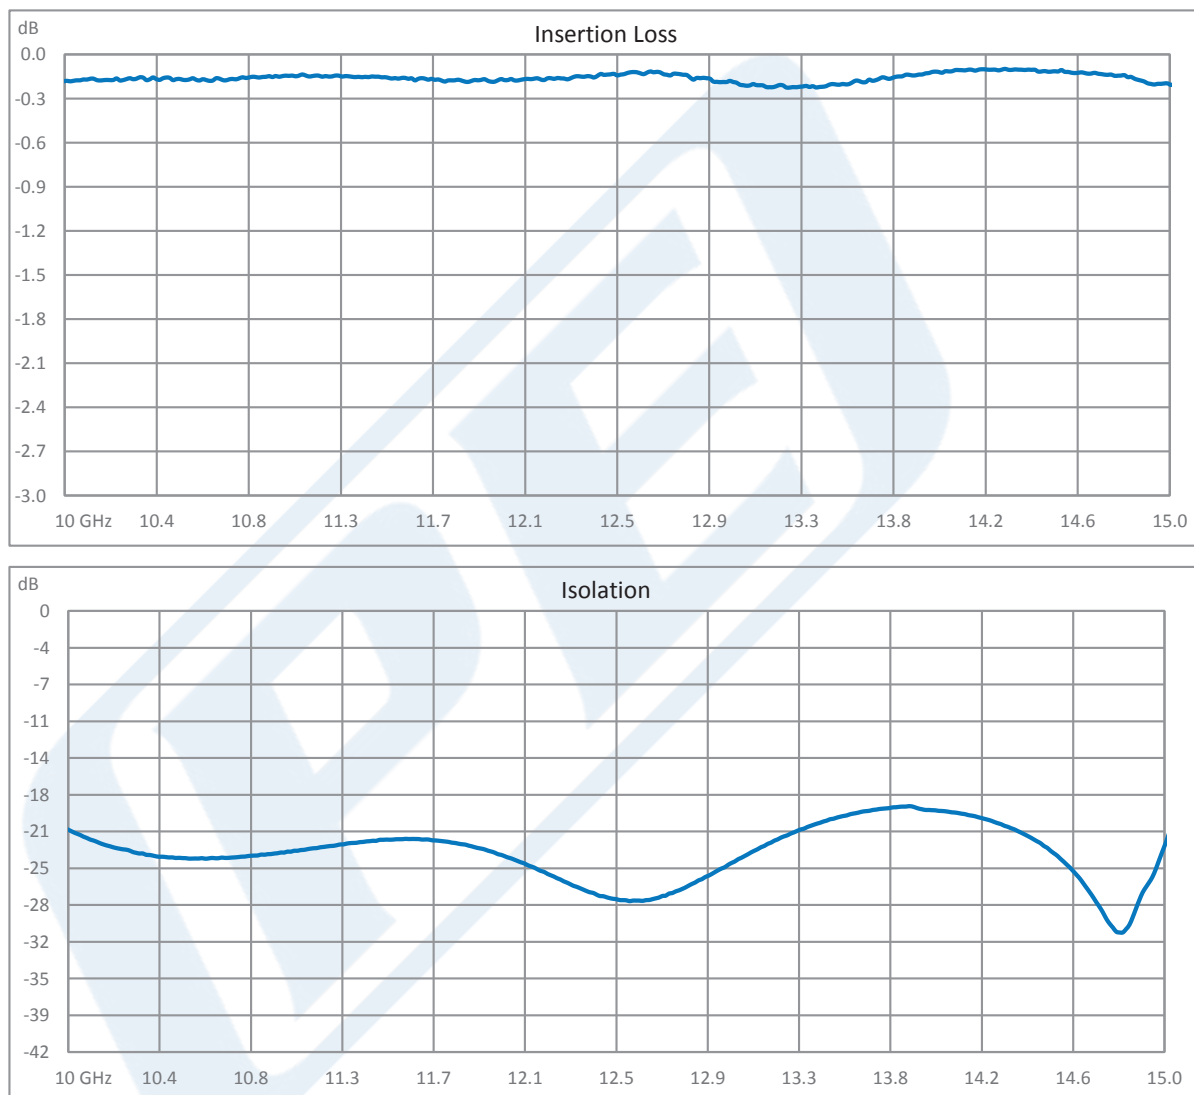

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-75 Waveguide Isolator from 10 GHz to 15 GHz, 18 dB Typical Isolation, Cover Flange PEWIR1008](#)



WR-75 Waveguide Isolator from 10 GHz to 15 GHz, 18 dB Typical Isolation, Cover Flange

Waveguide Isolators Technical Data Sheet

PEWIR1008

WR-75 Waveguide Isolator from 10 GHz to 15 GHz, 18 dB Typical Isolation, Cover Flange from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-75 Waveguide Isolator from 10 GHz to 15 GHz, 18 dB Typical Isolation, Cover Flange PEWIR1008](https://www.pasternack.com/wr75-waveguide-isolator-15ghz-18db-pewir1008-p.aspx)

URL: <https://www.pasternack.com/wr75-waveguide-isolator-15ghz-18db-pewir1008-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

