



10 dB WR-112 Directional Waveguide Broadwall Coupler With UG-51/U Square Cover Flange and E-Plane Coupled Port from 7.05 GHz to 10 GHz

The FMWCP1023 is a WR-112 Directional Broadwall waveguide coupler that operates in the frequency range of 7.05 to 10 GHz. This Waveguide component has a typical VSWR of 1.05:1. These designs are made of painted copper alloy and incorporate a broad wall configuration that result in a mid-band nominal coupling value of 10, 20, or 30 dB. Common applications for this component would be where power measurements are required within a system for measuring/sampling power or frequency monitoring with minimal signal loss to the main transmission line. Fairview Microwave offers a complete family of waveguide Crossguide and Broadwall couplers that are in-stock and ship same day.

Electrical Specifications*

Description	Min	Тур	Max	Units		
Frequency Range	7.05		10	GHz		
Directivity		40		dB		
Insertion Loss	0.15					
Main Line VSWR	1.05:1					
Nominal Coupling Level		10		dB		

^{*} Values at 25°C, sea level

Mechanical Specifications

Size

Length

Height

Weight

Configuration

Design Size

Input Flange

Flange Type Flange Designation

Material Plating

Output Flange

Flange Type
Flange Designation
Material
Plating

Coupled Flange(s)

Flange Type Square Cover Flange Designation UG-51/U Material Copper Alloy Plating Silver

Compliance Certifications (visit www.FairviewMicrowave.com for current

document)

RoHS Compliant REACH Compliant

12/17/2015

18.62 in [472.95 mm]

3.997 in [101.52 mm]

Directional E-Plane Broadwall

3.05 lbs [1.38 Kg]

WR-112

UG-51/U

Square Cover

Copper Alloy Silver

Square Cover

Copper Alloy Silver

UG-51/U

Features:

• Broadwall Waveguide Coupler

our own will lorow

- 10 dB Nominal Coupling Level
- 7.05 GHz to 10 GHz Frequency Range
- Body and Flanges made of Copper Alloy
- Low VSWR

Applications:

- Test Benches
- Radar
- Satellite
- Microwave Radio
- Attenuation Measurements
- Power Measurements
- Source Leveling

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com






Plotted and Other Data


Notes:

• Values at 25 °C, sea level

Typical Performance Data

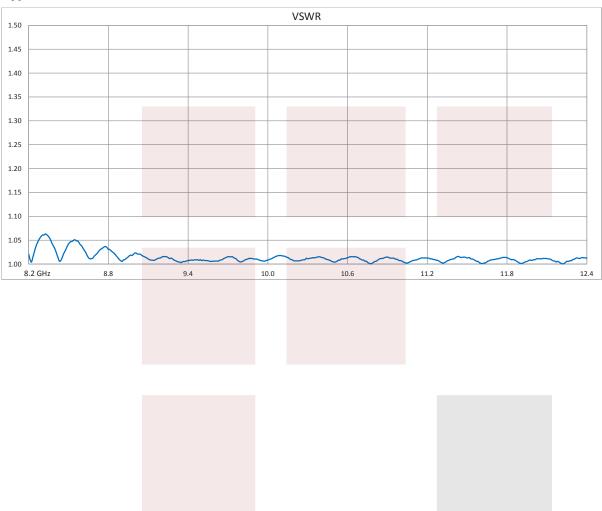



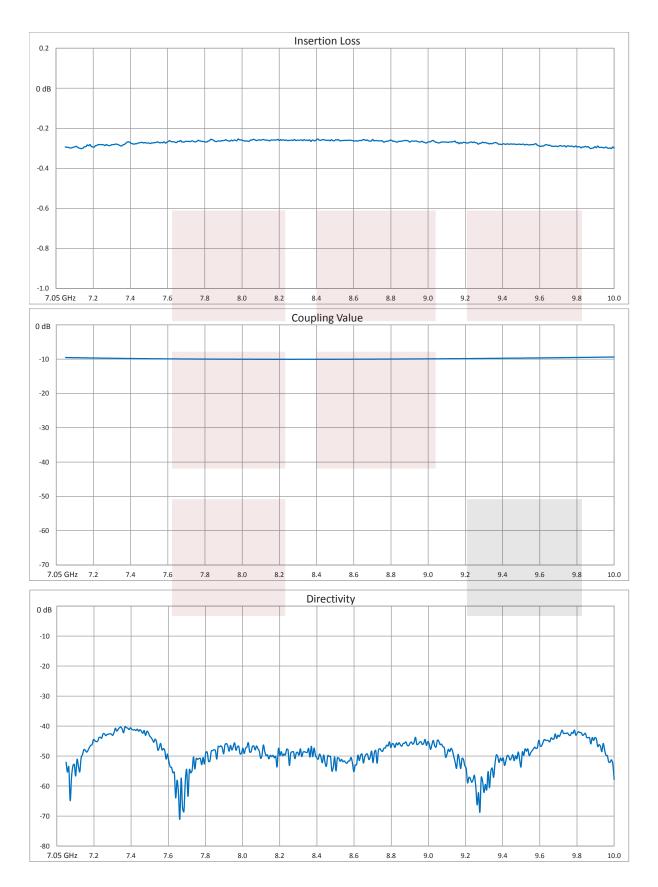






10 dB WR-112 Directional Waveguide Broadwall Coupler With UG-51/U Square Cover Flange and E-Plane Coupled Port from 7.05 GHz to 10 GHz from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: 10 dB WR-112 Directional Waveguide Broadwall Coupler With UG-51/U Square Cover Flange and E-Plane Coupled Port from 7.05 GHz to 10 GHz FMWCP1023

URL: http://www.fairviewmicrowave.com/10-db-wr-112-directional-waveguide-broadwall-coupler-ug51-square-e-fmw-cp1023-p.aspx

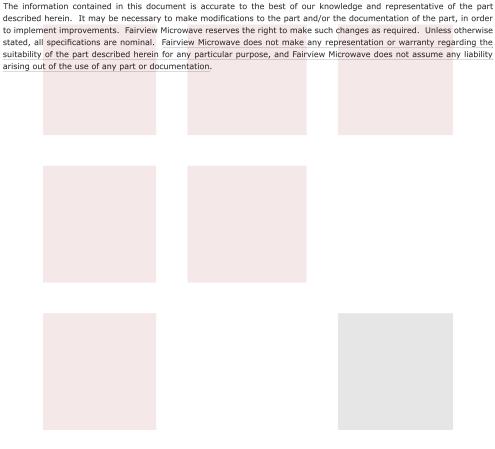





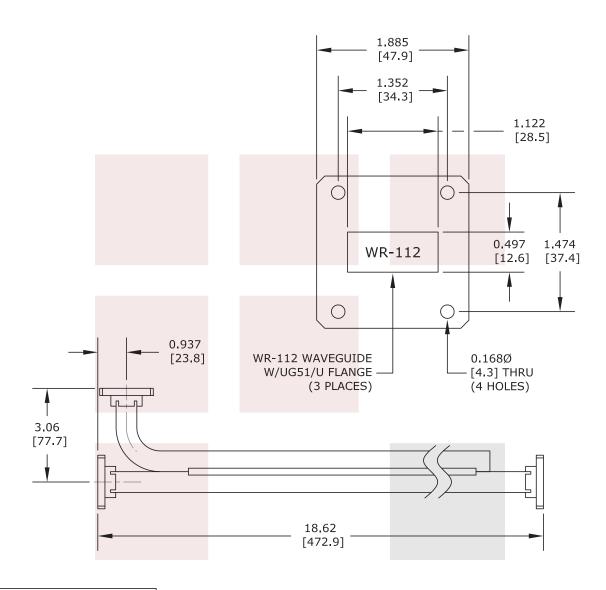

st THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE $\ \#1$ ON TITLE BLOCK.

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].							
10 dB WR-112 Directional Waveguide Broadwall Coupler With UG-51/U Square Cover Flange and E-Plane Coupled Port from 7.05 GHz to 10 GHz	DWG NO FMWCP1023			CAGE CODE 3FKR5				
	CAD FILE 041316	SHEET	SCALE	≣ N/A	SIZE A	2233		