

17.3 dB Coupler 5 - 2000 MHz



MACP-011068

Rev. V3

Features


- Surface Mount Package
- 17.3 dB Coupler
- 260°C Reflow Compatible
- RoHS Compliant and Lead Free
- Available on Tape and Reel

Description

The MACP-011068 is a 17.3 dB coupler offered in a surface mount package.

Ideally suited for 75 Ω power monitoring in CATV DOCSIS 3.1 nodes and line extenders.

Functional Schematic



Pin Configuration³

| Pin # | Function | Pin # | Function |
|-------|----------|-------|----------------------|
| 1 | Input | 4 | External 75 Ω |
| 2 | Ground | 5 | Not Connected |
| 3 | Coupled | 6 | Output |

3. MACOM recommends connecting unused package pins to ground.

Ordering Information^{1,2}

| Part Number | Package |
|----------------|----------------|
| MACP-011068 | 900 piece reel |
| MACP-011068-TB | Sample Board |

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

17.3 dB Coupler 5 - 2000 MHz



MACP-011068

Rev. V3

Electrical Specifications: Freq. = 5 - 2000 MHz, T_A = 25°C, Z₀ = 75 Ω, P_{IN} = 0 dBm

| Parameter | Frequency Test Conditions (MHz) | Units | Min. | Typ. | Max. |
|--------------------------------|--|-------|----------------|-------------------|--------------------|
| Coupling (pin1-3) | 5 - 2000 | dB | 16.8 | 17.3 | 17.8 |
| Main Line Loss (pin 1-6) | 5 - 1225 1225 - 1800 1800 - 2000 | dB | — | 0.6 1.1 1.4 | 0.7 1.25 1.6 |
| Input Return Loss (pin 1) | 5 - 1225 1225 - 1800 1800 - 2000 | dB | 20 18 16 | 26 24 20 | — |
| Output Return Loss (pin 6) | 5 - 1225 1225 - 1800 1800 - 2000 | dB | 18 15 14 | 26 19 17 | — |
| Coupled Return Loss (pin 3) | 5 - 1225 1225 - 1800 1800 - 2000 | dB | 20 20 20 | 27 25 23 | — |
| Isolation (Pin 1-4) | 5 - 1225 1225 - 1800 1800 - 2000 | dB | 26 21 20 | 34 26 23 | — |

Absolute Maximum Ratings^{4,5}

| Parameter | Absolute Maximum |
|--------------------------|------------------|
| Input Power ⁶ | 2 W |
| DC Current | 500 mA |
| Operating Temperature | -40°C to +85°C |

4. Exceeding any one or combination of these limits may cause permanent damage to this device.
5. MACOM does not recommend sustained operation near these survivability limits.
6. Specified at +25°C only and measured at 800 MHz.


17.3 dB Coupler 5 - 2000 MHz



MACP-011068

Rev. V3

Electrical Specifications: $T_A = 25^\circ\text{C}$, 0 $Z_0 = 75 \Omega$, $P_{in} = 0 \text{ dBm}$

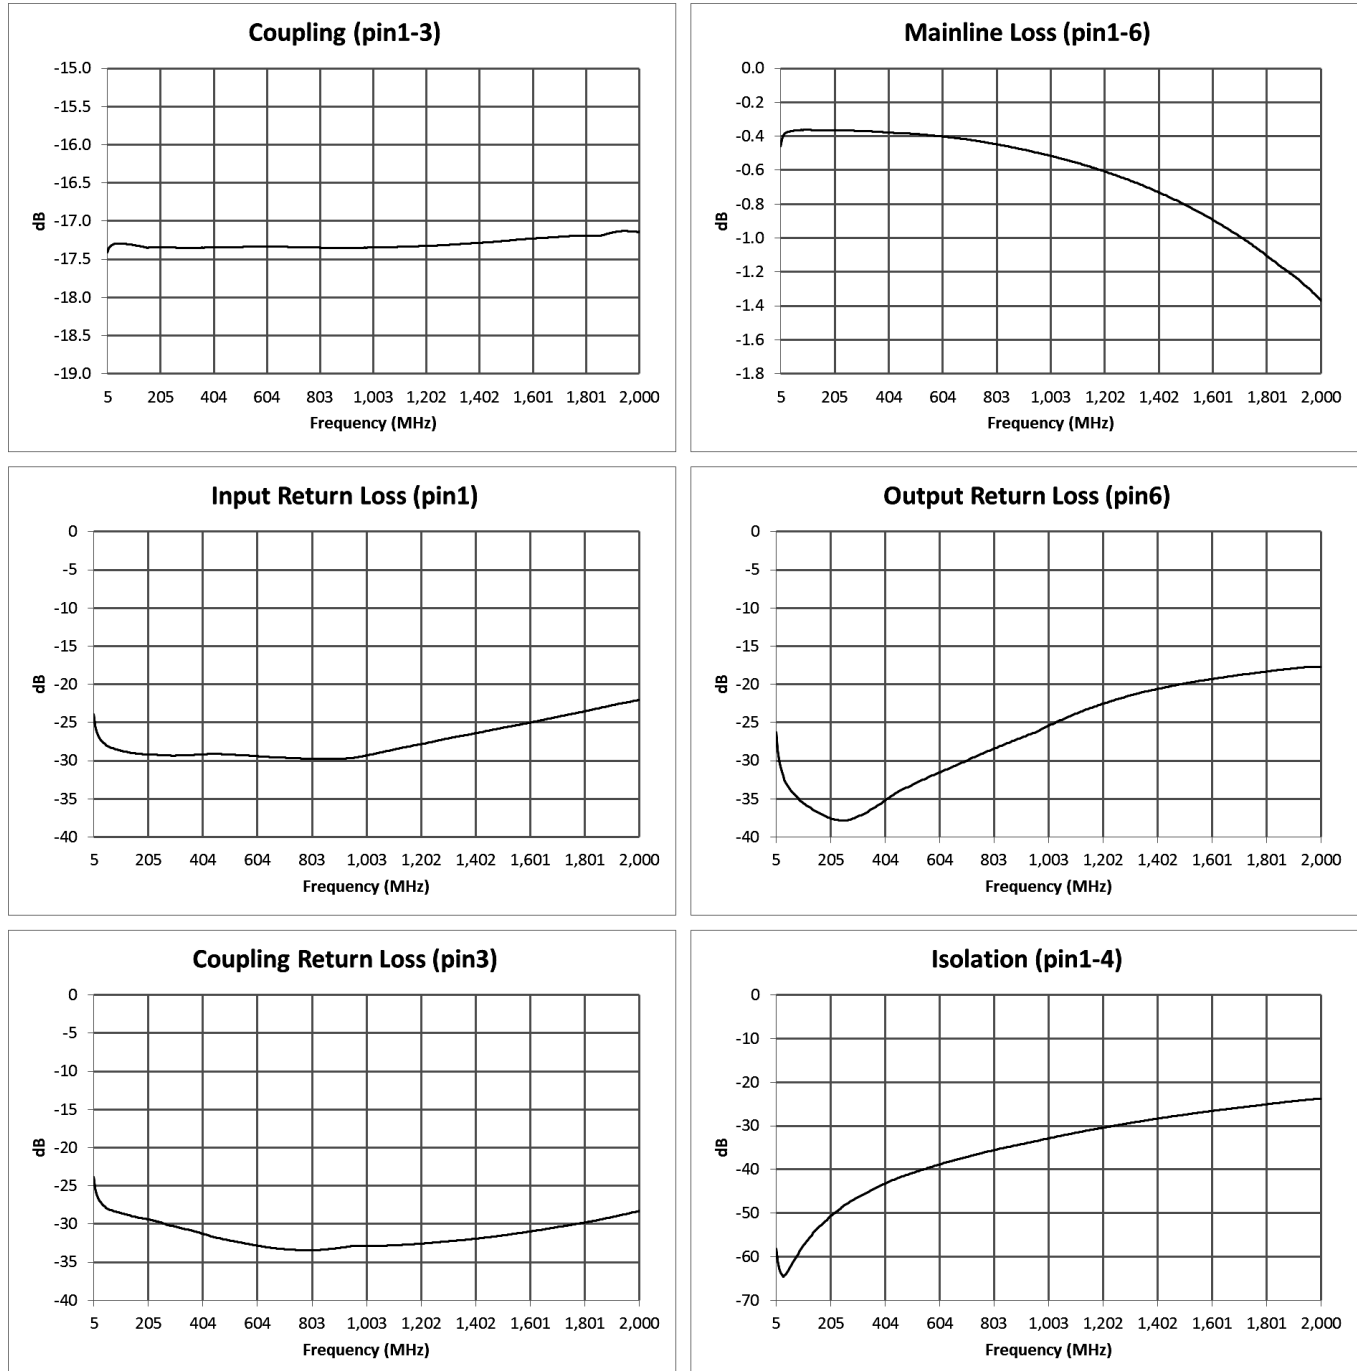


17.3 dB Coupler 5 - 2000 MHz



MACP-011068


Rev. V3

PCB Layout⁷

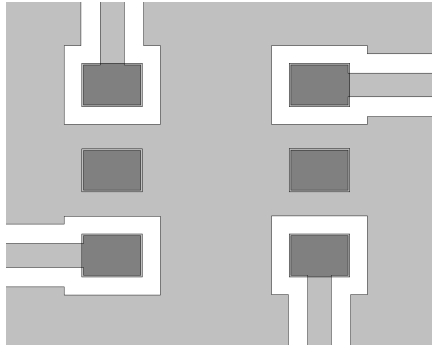


7. Recommended PCB layout shown above uses 1.6 mm FR4, Grounded coplanar wave guide, transmission line width 0.70 mm and gap 0.57 mm.

Outline Drawing^{8,9,10,11}

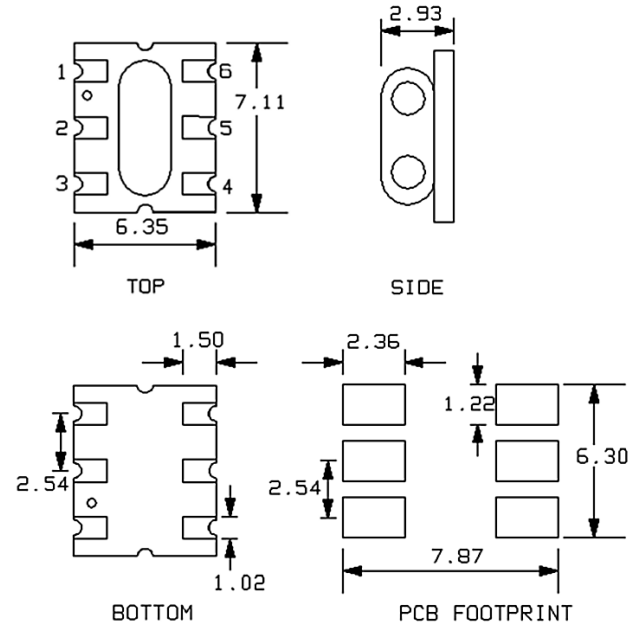


- 8. Dimensions in mm.
- 9. Tolerance: ± 0.2 mm unless otherwise noted.
- 10. Model number and lot code are printed on the reel.
- 11. Finish: Electroless nickel immersion gold (ENIG).

Application Schematic

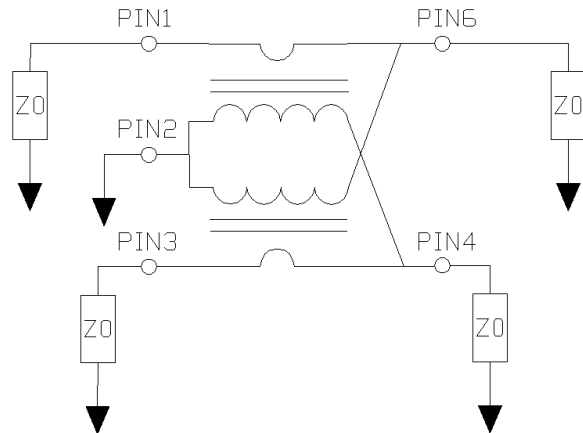

Carrier Tape Orientation

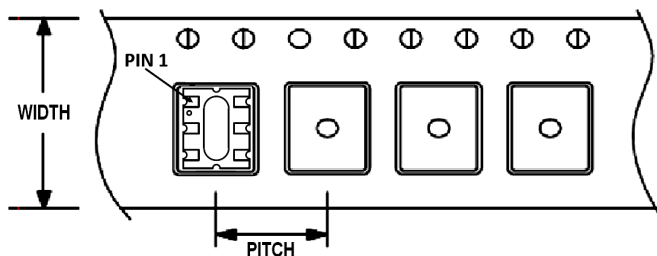

Tape & Reel Information

| Parameter | Units | Value |
|--|-------|-------|
| Qty per reel | - | 900 |
| Reel Size | mm | 330 |
| Tape Width | mm | 16.0 |
| Pitch | mm | 12.0 |
| Orientation | - | F15 |
| Reference Application Note ANI-019 for orientation | | |

17.3 dB Coupler

5 - 2000 MHz



MACP-011068

Rev. V3

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.