

WR-22 Waveguide 30 dB Broadwall Coupler, UG Cover Flange,  
2.4mm Female Coupled Port, 33 GHz to 50 GHz, Copper

## Waveguide Couplers Technical Data Sheet

**PEW22CP005-30**

The PEW22CP005-30 is a WR-22 Directional Broadwall waveguide coupler with 2.4mm female coupled port that operates in the frequency range of 33 to 50 GHz. This Waveguide component has a maximum VSWR of 1.5:1. These designs are made of copper alloy and incorporate a broad wall configuration that result in a mid-band nominal coupling value of 10, 20, 30, 40 or 50 dB. Common applications for this component would be where power measurements are required within a system for measuring/sampling power or frequency monitoring with minimal signal loss to the main transmission line. Pasternack offers a complete family of waveguide Crossguide and Broadwall couplers that are in-stock and ship same day.

### Features

- Three Port Broadwall Waveguide Coupler
- 30±1 dB Nominal Coupling Level
- Integrated 2.4mm Female Connector coupled port
- 33 GHz to 50 GHz Frequency Range
- Main Line VSWR < 1.1:1
- Max Power 70W (CW)

### Applications

- Test Benches
- Radar
- Satellite
- Microwave Radio
- Attenuation Measurements
- Power Measurements
- Source Leveling

### Electrical Specifications


Description	Minimum	Typical	Maximum	Units
Frequency Range	33		50	GHz
<b>Coupler</b>				
Nominal Coupling Level		30		dB
Directivity	30			dB
Insertion Loss			0.4	dB
Main Line VSWR			1.1:1	
Secondary Line VSWR			1.5:1	
Coupling Flatness			±1	dB
Input Power (CW)			70	Watts
Input Power, Peak			10	kWatts

### Mechanical Specifications

#### Size

Length	4.33 in [109.98 mm]
Width	1.13 in [28.7 mm]
Height	1.13 in [28.7 mm]
Weight	0.17 lbs [77.11 g]
Flange Type	UG Cover

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-22 Waveguide 30 dB Broadwall Coupler, UG Cover Flange, 2.4mm Female Coupled Port, 33 GHz to 50 GHz, Copper PEW22CP005-30](#)



WR-22 Waveguide 30 dB Broadwall Coupler, UG Cover Flange,  
2.4mm Female Coupled Port, 33 GHz to 50 GHz, Copper

## Waveguide Couplers Technical Data Sheet

**PEW22CP005-30**

Flange Material and Plating  
RF Connector Type

Copper, Gold  
2.4mm Female

Coupler Body Material and Plating

Copper, Gold

### Environmental Specifications

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

WR-22 Waveguide 30 dB Broadwall Coupler, UG Cover Flange, 2.4mm Female Coupled Port, 33 GHz to 50 GHz, Copper from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-22 Waveguide 30 dB Broadwall Coupler, UG Cover Flange, 2.4mm Female Coupled Port, 33 GHz to 50 GHz, Copper PEW22CP005-30](#)

URL: <https://www.pasternack.com/wr22-waveguide-30db-broadwall-coupler-ug-50mhz-pew22cp005-30-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PEW22CP005-30 CAD Drawing

WR-22 Waveguide 30 dB Broadwall Coupler, UG Cover Flange,  
2.4mm Female Coupled Port, 33 GHz to 50 GHz, Copper

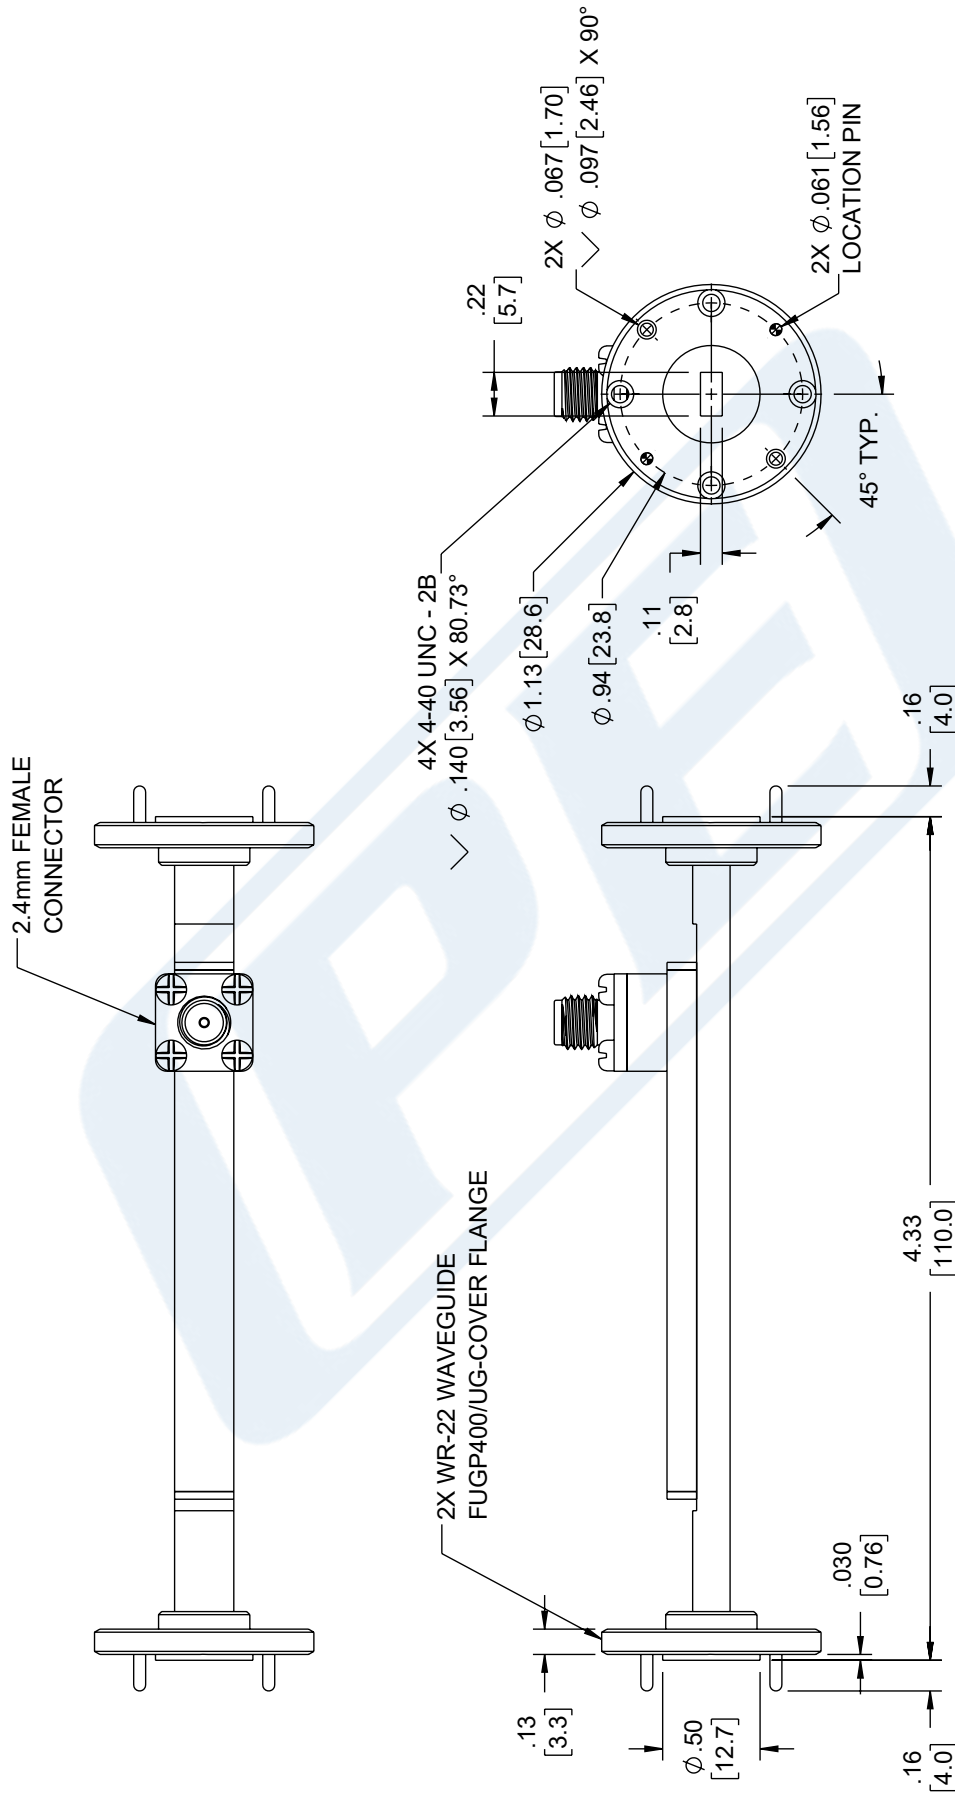

<b>PE PASTERNAK</b> an INFINITO brand		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE: NONE SHEET: 1 OF 1
Website: <a href="http://www.Pasternack.com">www.Pasternack.com</a> Phone: 1.866.727.8376   1.949.261.1920		DESCRIPTION: WR-22 Waveguide broadwall coupler, 30dB with 2.4mm female connector
SIZE: A	CAGE CODE: 53919	DRAWN BY: HBAKKE ITEM NO.: PEW22CP005-30
REV: A		

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
 .X = ±.2 [5] FRACTIONS  
 .XX = ±.02 [.5] ±.1/32  
 .XXX = ±.005 [.13] ANGLES ± 1°  
 CABLE LENGTH TOLERANCES:  
 ≤12 [305] = +1 [25] / -0  
 >12 [305] ≤ 60 [1524] = +2 [51] / -0  
 >60 [1524] ≤ 120 [3048] = +4 [102] / -0  
 >120 [3048] ≤ 300 [7620] = +6 [152] / -0  
 >300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
AND SUBJECT TO CHANGE WITHOUT NOTICE.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.  
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.