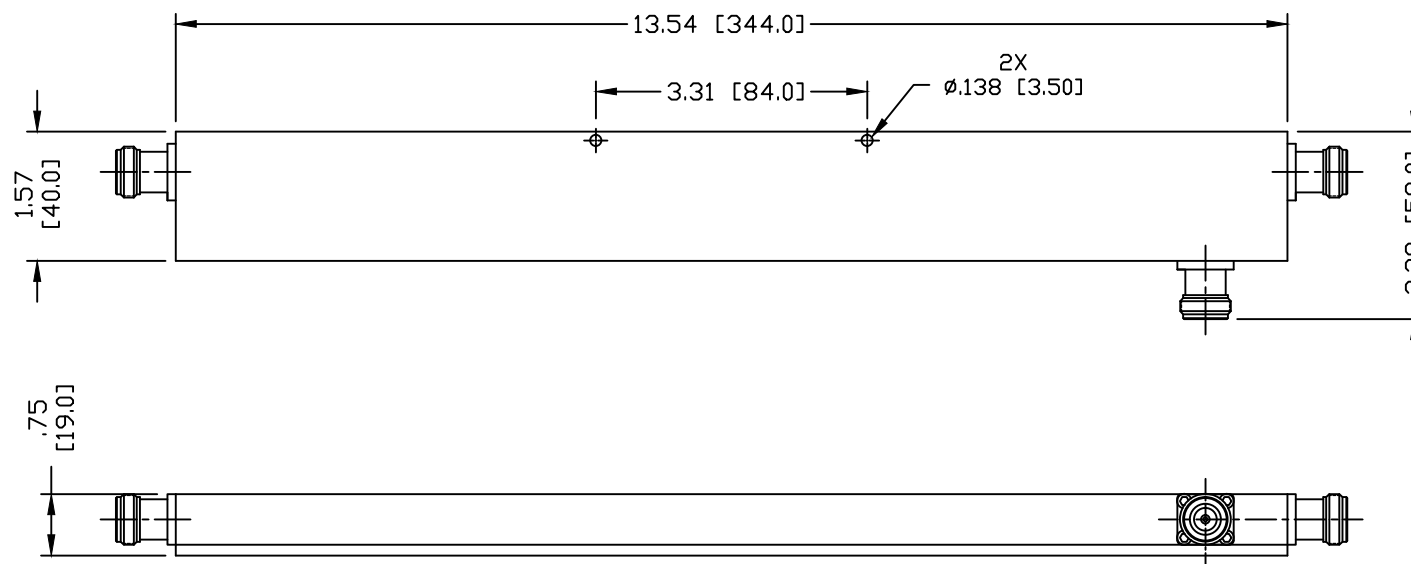


PART NO.

RFDC-20DBPS-NF

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	08/19/19	JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms
 OPERATION FREQUENCY BAND: 138-960 MHz
 COUPLING: -20dB
 COUPLING TOLERANCE: ± 2.0 dB
 INSERTION LOSS: ≤ 0.40 dB
 ISOLATION: ≥ 35 dB
 VSWR: ≤ 1.30
 AVERAGE POWER: 200 WATT
 COLOR: RED
 TEMPERATURE: $-35^{\circ}\text{C} \sim +65^{\circ}\text{C}$
 APPLICATION: INDOOR
 REGULATORY COMPLIANCE/CERTIFICATIONS: IP60

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN	
C. ZUNIGA	08/19/19
CHECKED	
ORJ DRAWN	
C. ZUNIGA	08/19/19

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY
 TO RF INDUSTRIES. ANY
 UNAUTHORIZED USE OF
 THIS DRAWING IS
 EXPRESSLY PROHIBITED
 WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY
 VIOLATION IS PUNISHABLE
 UNDER U.S. COPYRIGHT
 LAWS.

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

20dB DIRECTIONAL COUPLER
N FEMALE - 138-960 MHz

SIZE	CABLE GROUP	DWG NO.	REVISION
A		RFDC-20DBPS-NF	—
SCALE:	ENGINEERING ID:		
NTS	000000		SHEET 1 OF 1