
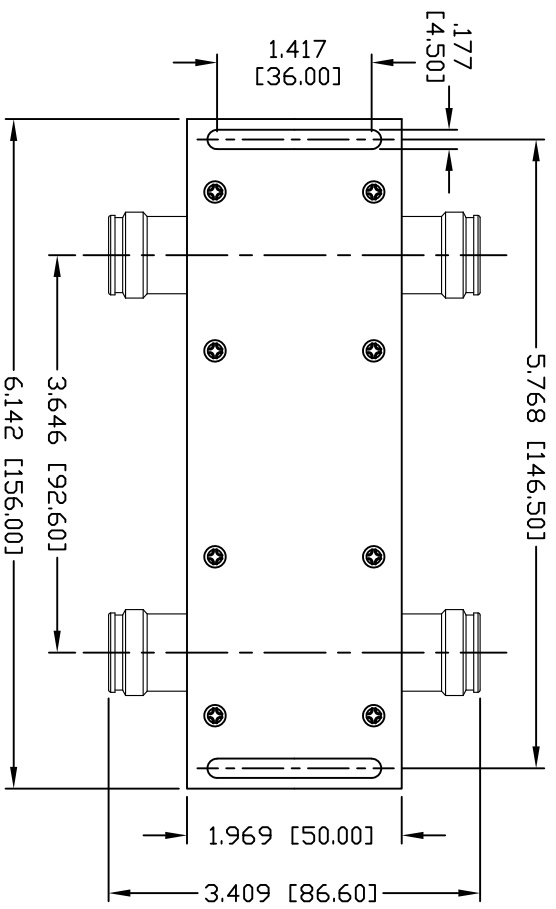


PART NO.		RHHC-3DBC-43F		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	11/19/20	JDMc

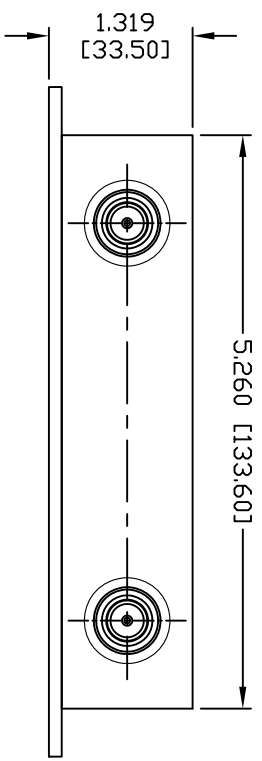

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 OPERATION FREQUENCY BAND: 555-2700 MHZ
 3RD INTERMODULATION: ≤ -161 dBc @ 2x43 dBm
 COUPLING: 3.1 dB
 POWER: 300 WATT AVERAGE
 INSERTION LOSS (dB): ≤ 1.0
 ISOLATION: 20 dB MIN.
 RF PEAK POWER: 1.5 KW MAX.
 VSWR: ≤ 1.25
 COLOR: BLACK
 OPERATION TEMPERATURE: -35°C ~ +65°C
 APPLICATION: INDOOR/OUTDOOR
 REGULATORY COMPLIANCE/CERTIFICATIONS: RoHS/IP65

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN	11/19/20
CHECKED	
ORD DRAWN	11/19/20
C. ZUÑIGA	

ROHS COMPLIANT

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

RF Connectors
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340

3dB HYBRID COUPLER
4.3-10 FEMALE - 555-2700 MHZ

SIZE	CABLE GROUP	DWG NO.	REVISION
A		RHHC-3DBC-43F	—

SCALE: NTS ENGINEERING ID: 000000 SHEET 1 OF 1