

0.5 GHz to 2 GHz, N Type High Currnet Bias
Tee, Rated 7 Amps and 100 Volts, DC Pin

Bias Tees Technical Data Sheet

PE1657

Features

- High Current Bias Tee
- 1 GHz to 6 GHz Frequency Range
- Insertion Loss: 0.2 dB Typ
- Isolation: 30 dB typ
- VSWR: 1.2:1 typ
- RF Input Power Handling 50W max
- 50 Ohms Input and Output Matched
- N Type Male RF Input Connector
- N Type Female RF Output Connector
- DC Connector: Solder Post Pin
- Operational Temperature: -55°C to +105°C
- Rating: 7 Amps DC Current and +100V max DC Voltage

Applications

- Biasing for Antenna Amplifiers, Laser Diodes, Photo Diodes, Optical Modulators
- Test & Measurement
- SATCOM
- Wireless Communications
- Systems
- Power over Ethernet
- Base Stations and Radios

Description

The PE1657 is a High Current Bias Tee that operates from 1 GHz to 6 GHz. This general purpose Bias Tee is used in applications that require a source of DC voltage and current to be injected into an RF circuit without affecting the RF signal through the main transmission path. The module is designed for a 50 ohm input/output impedance and displays impressive typical performance that includes 0.2 dB insertion loss, 30 dB RF to Bias Port Isolation, and 1.2:1 VSWR. The Bias Tee is rated for 7 Amps and +100 Volts max DC voltage. Maximum RF input power handling is 50W. The compact package uses an N Type Male connector at the RF input and an N Type Female connector at the RF output. A Solder Post Pin is used for the DC port. Operational Temperature is -55°C to +105°C.


Configuration

RF Port Connector	N Male
DC/RF Port Connector	N Female
DC Port Connector	DC Pin

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.5		2	GHz
Impedance		50		Ohms
VSWR		1.2:1	1.4:1	
Insertion Loss		0.2	0.5	dB
RF to Bias Isolation		30		dB
DC Voltage			100	Vdc
DC Current			7	A
Input Power (CW)			50	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0.5 GHz to 2 GHz, N Type High Currnet Bias Tee, Rated 7 Amps and 100 Volts, DC Pin PE1657](#)

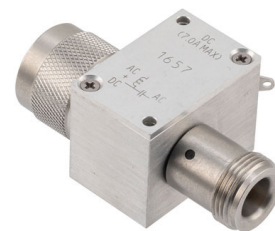

0.5 GHz to 2 GHz, N Type High Currnet Bias
Tee, Rated 7 Amps and 100 Volts, DC Pin

Bias Tees Technical Data Sheet

PE1657

Bias Path Resistance	0.01	0.01	Ohm
----------------------	------	------	-----

Electrical Specification Notes:
Values at +25°C, sea level.

Mechanical Specifications

Size

Length	1.29 in [32.77 mm]
Width	0.85 in [21.59 mm]
Height	1 in [25.4 mm]
Weight	0.05 lbs [22.68 g]

Environmental Specifications

Temperature


Operating Range	-55 to +105 deg C
Storage Range	-60 to +90 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0.5 GHz to 2 GHz, N Type High Currnet Bias Tee, Rated 7 Amps and 100 Volts, DC Pin PE1657](#)

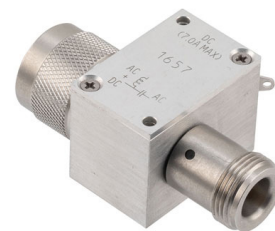


0.5 GHz to 2 GHz, N Type High Current Bias
Tee, Rated 7 Amps and 100 Volts, DC Pin


Bias Tees Technical Data Sheet

PE1657

Typical Performance Data

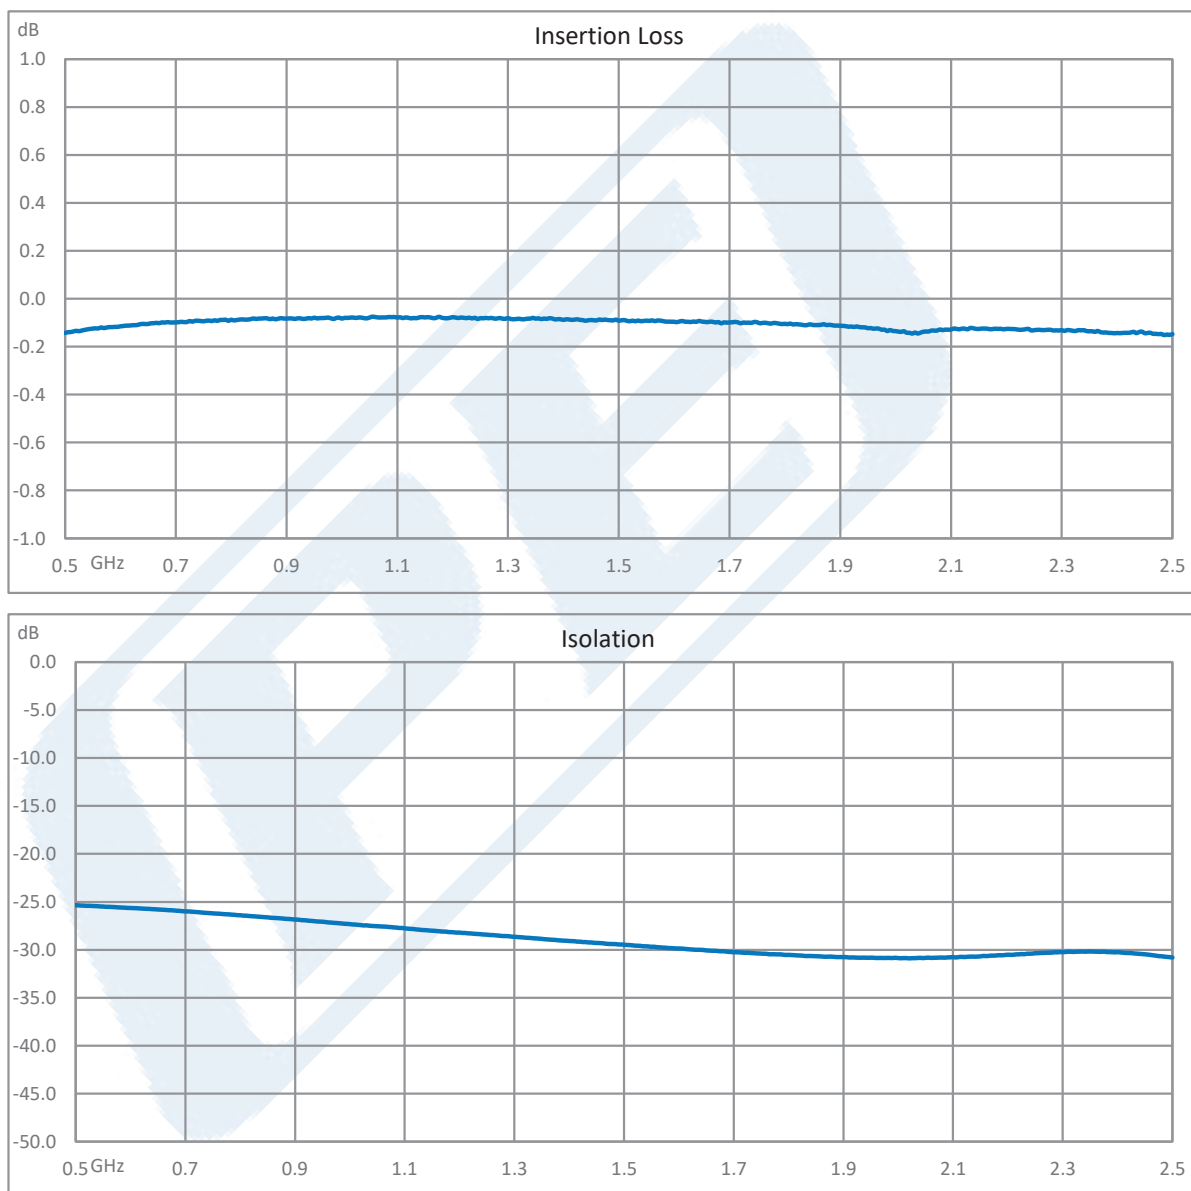


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0.5 GHz to 2 GHz, N Type High Current Bias Tee, Rated 7 Amps and 100 Volts, DC Pin PE1657](#)

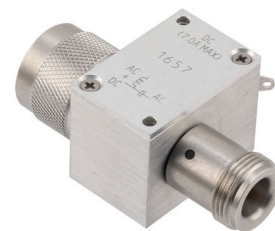

0.5 GHz to 2 GHz, N Type High Current Bias
Tee, Rated 7 Amps and 100 Volts, DC Pin

Bias Tees Technical Data Sheet

PE1657

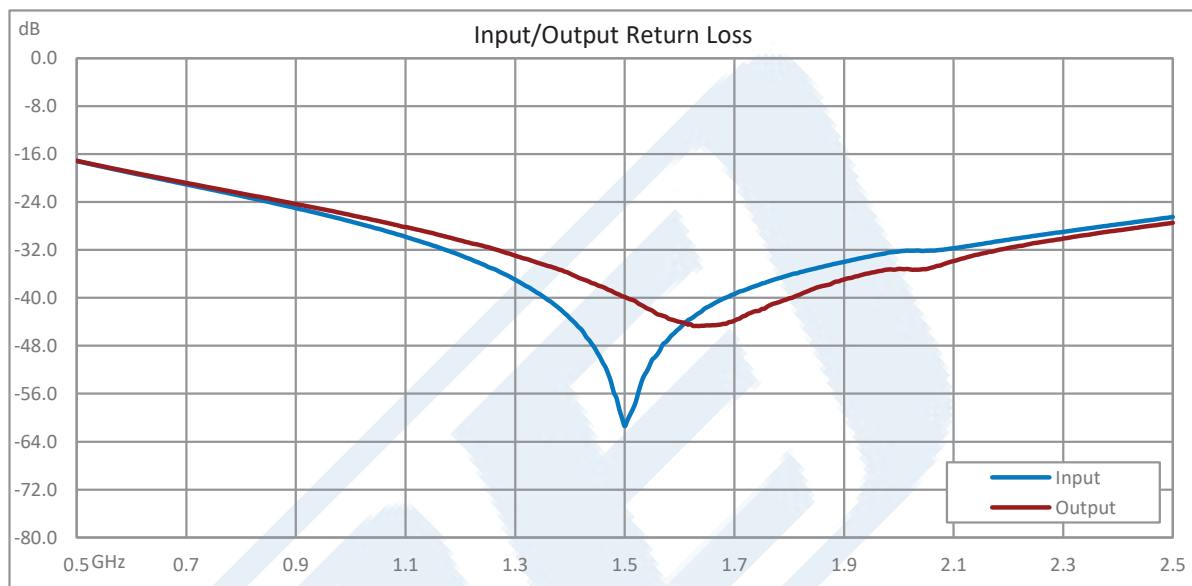

0.5 GHz to 2 GHz, N Type High Current Bias Tee, Rated 7 Amps and 100 Volts, DC Pin from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0.5 GHz to 2 GHz, N Type High Current Bias Tee, Rated 7 Amps and 100 Volts, DC Pin PE1657](https://www.pasternack.com/500-mhz-2-ghz-bias-tee-7000-ma-100-volts-dc-pe1657-p.aspx)

URL: <https://www.pasternack.com/500-mhz-2-ghz-bias-tee-7000-ma-100-volts-dc-pe1657-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.