



6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm

Phase Shifters and Trimmers Technical Data Sheet

PE82P5021

Features

- Programmable Phase Shifter
- 18 GHz to 26 GHz
- Phase Shift 0° to 360° typ
- TTL Digital Control
- 6 Control Bits
- Step Size 5.625° typ
- Insertion Loss 14 dB typ
- Phase Flatness +/- 5° typ
- Input P1dB +23 dBm typ
- Maximum RF Input Power +11 dBm
- 50 Ohm Design
- DC Bias +12V @ 20 mA
- Micro-D15 Female Connector
- Field Replaceable Female 2.92mm RF Connectors
- Operational Temperature Range -40°C to +85°C
- Rugged and Compact Aluminum Nickel Plated Package Design
- Environmental Test Conditions Altitude, Vibration, Humidity, Shock
- Single DC Control Operation
- Low Phase Error

Applications

- Test & Measurement
- Military & Commercial
- Communications
- Military Electronic Systems
- Research & Development

Description

The PE82P5021 is a 6 Bit Digitally Controlled Programmable Phase Shifter that operates across a frequency band from 18 to 26 GHz. The 50 Ohm design has a phase shift range from 0° to 360° with 6 control bits and a step size of 5.625°. Impressive typical performance includes 14 dB insertion loss, +/- 5° phase flatness, input 1 dB compression point of +23 dBm, and a maximum RF input power level of +11 dBm. The unit requires +12Vdc bias voltage with 20 mA DC current. The low profile pin package is aluminum with Nickel plating and supports field replaceable 2.92mm RF connectors and a Micro-D15 female connector for DC Bias and Command Control functions. The module has an operational temperature range from -40°C to +85°C and is guaranteed to meet a series of environmental test conditions for Altitude, Vibration, Humidity, and Shock.

Electrical Specifications (Values at +25° C, Sea Level)

Description	Minimum	Typical	Maximum	Units
Frequency Range	18		26	GHz
Impedance		50		Ohms
Phase Shift		360		Degrees
Phase LSB Step		5.625		Degrees
Input VSWR		2.5:1	3.5:1	
Insertion Loss*		14	16	dB
Phase Flatness		±5	±25	Degrees
IL Temperature Coefficient		0.008		dB/deg C
Input 1 dB Compression Point			23	
DC Voltage		12		Volts
DC Current		20		mA
Input Power, CW			11	dBm
Control Bits		6		

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm PE82P5021](#)



6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm

Phase Shifters and Trimmers Technical Data Sheet

PE82P5021

*at 0V DC Control

Absolute Maximum Rating

Parameter	Rating
Biasing	+12V +/-10%
RF input Power	+11 dBm

Mechanical Specifications

Size

Length	1.772 in [45.01 mm]
Width/Diameter	1.693 in [43 mm]
Height	0.551 in [14 mm]
Weight	0.13 lbs [58.97 g]
Body Material and Plating	Aluminum, Nickel

Configuration

Input Connector	2.92mm Female
Input Connector Specification	Field Replaceable
Output Connector	2.92mm Female
Output Connector Specification	Field Replaceable

Environmental Specifications

Temperature

Operating Range	-40 to 85 deg C
Storage Range	-50 to 105 deg C

Humidity	100% RH at 35°C, 95% RH at 40°C
Shock	20G for 11 msec half sine wave, 3 axis both directions
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Altitude	30,000 Feet

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm PE82P5021](#)

6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm




Phase Shifters and Trimmers Technical Data Sheet


PE82P5021

Typical Performance Data


Insertion Loss @+25°C

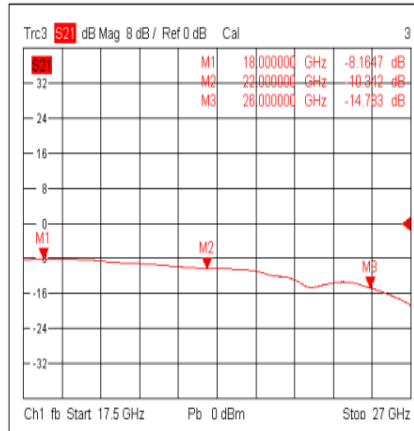


Input VSWR @+25°C

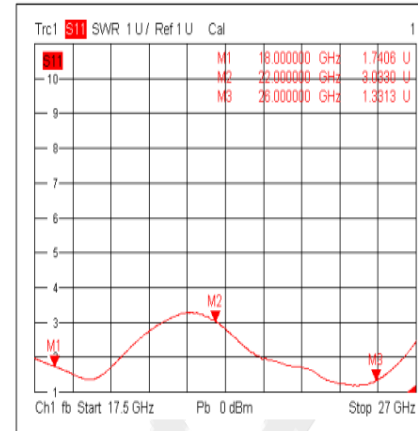

Output VSWR @+25°C

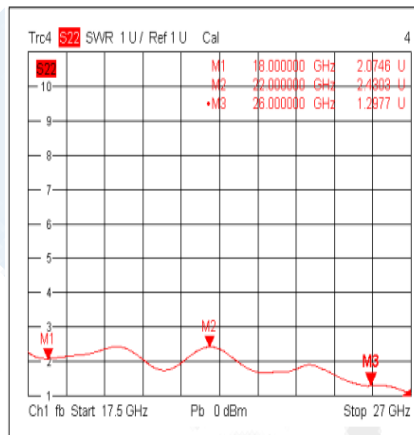

Insertion Loss @-40°C

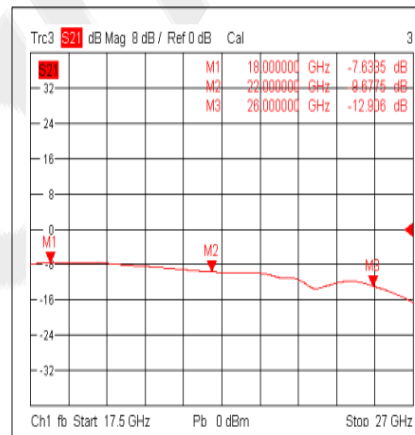

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm PE82P5021](#)


6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm




Phase Shifters and Trimmers Technical Data Sheet

PE82P5021


Input VSWR @-40°C

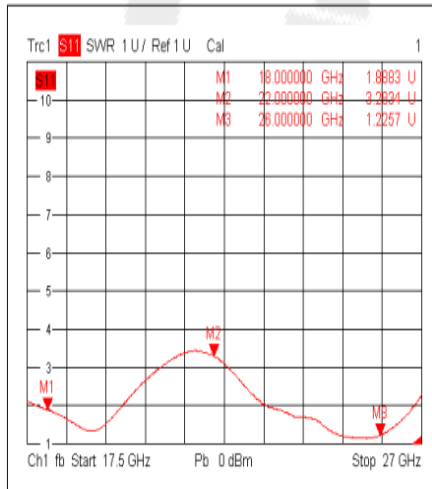


Output VSWR @-40°C

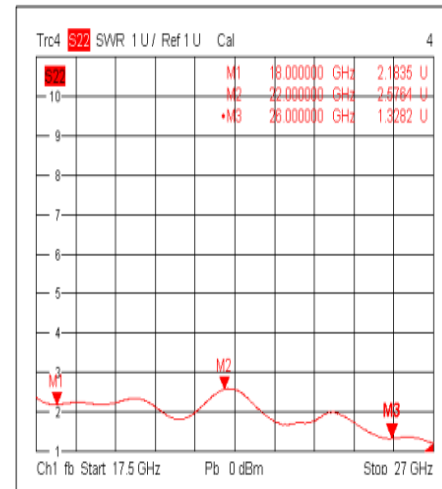

Insertion Loss @+85°C

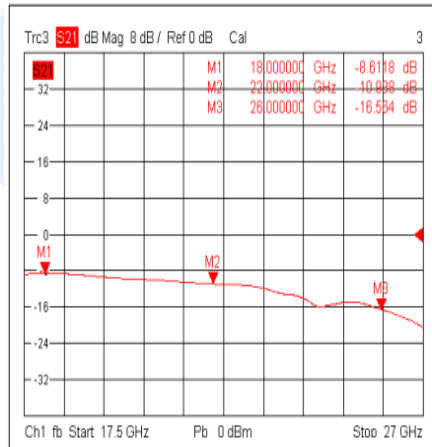

Input VSWR @+85°C

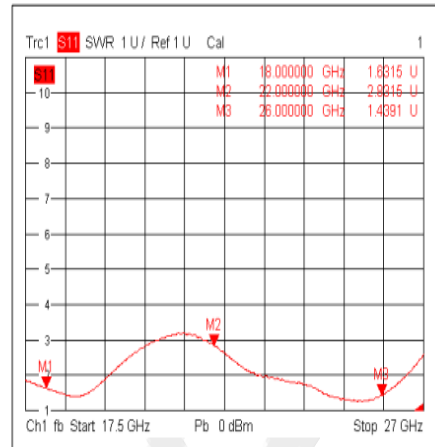

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm PE82P5021](#)


6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm




Phase Shifters and Trimmers Technical Data Sheet

PE82P5021


Output VSWR @+85°C

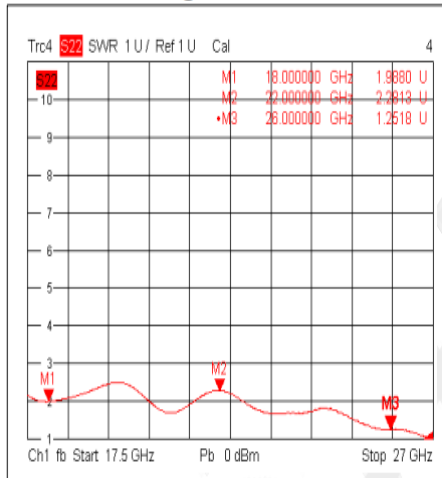


Insertion Loss vs. Frequency

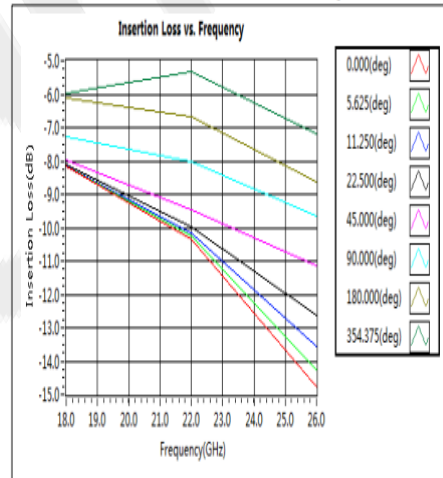

Input VSWR vs. Frequency(S11)

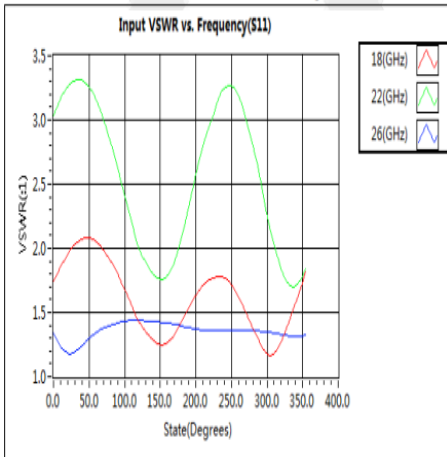

Output VSWR vs. Frequency(S22)

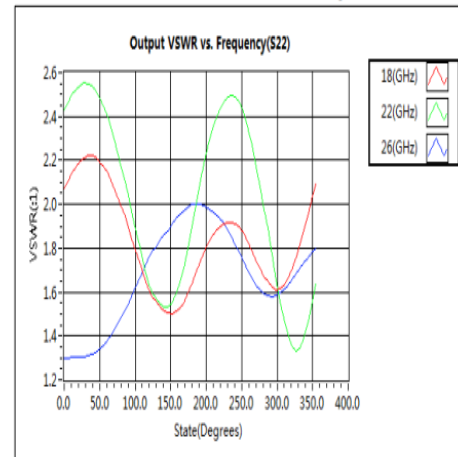

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm PE82P5021](#)


6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm




Phase Shifters and Trimmers Technical Data Sheet

PE82P5021


Phase Error vs. Frequency

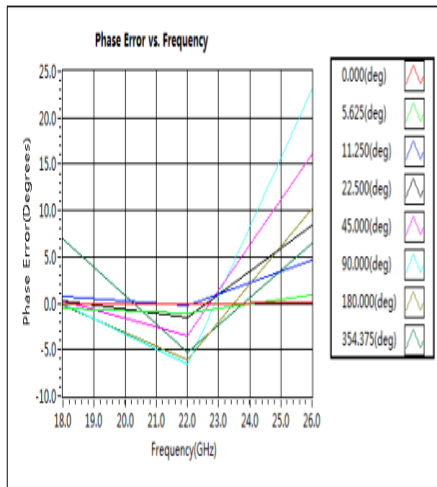


Phase Error vs. State

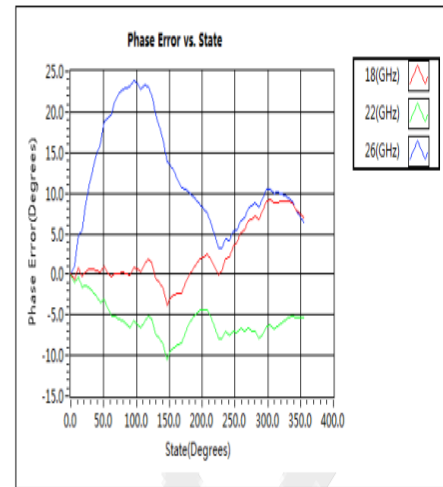

Normalized Loss . All States

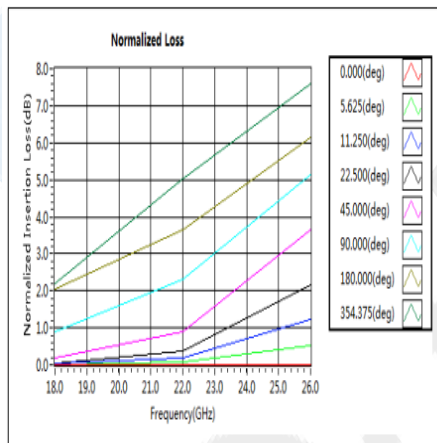

Relative Phase Shift vs. Frequency

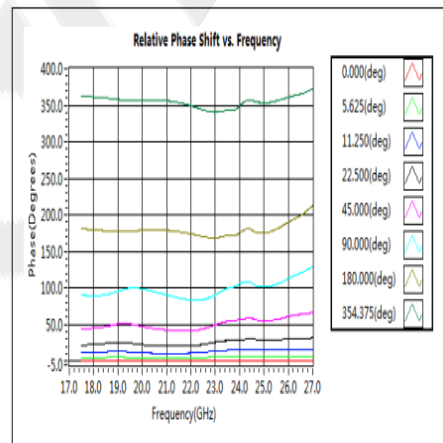

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm PE82P5021](#)




6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm

Phase Shifters and Trimmers Technical Data Sheet

PE82P5021

Attenuation vs. Frequency

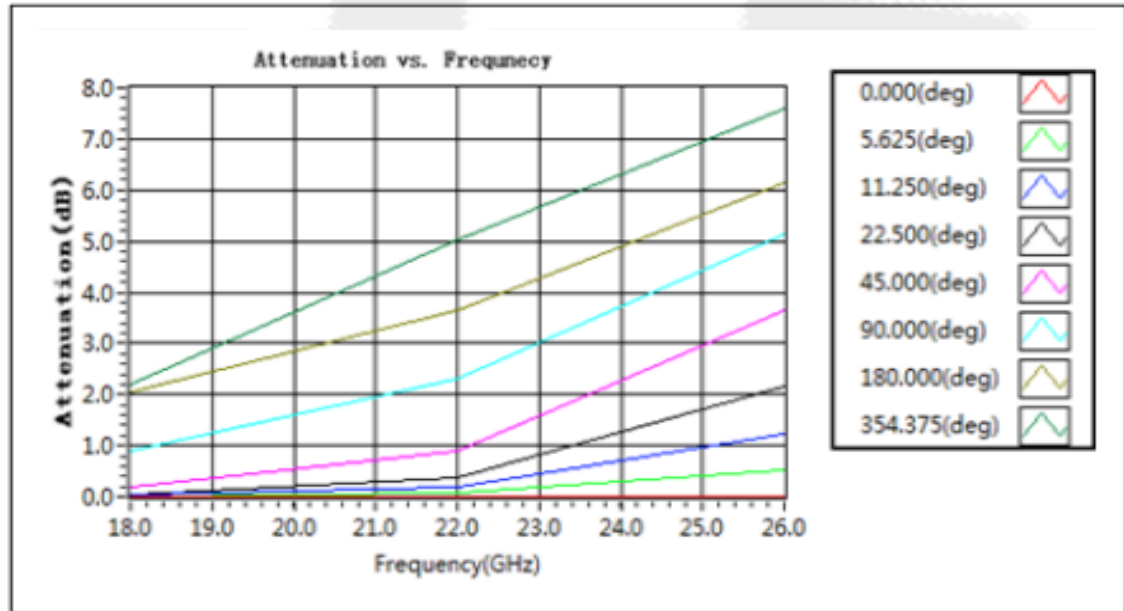

6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm PE82P5021](https://www.pasternack.com/programmable-phase-shifter-26-ghz-0-0-degrees-2.92mm-pe82p5021-p.aspx)

URL: <https://www.pasternack.com/programmable-phase-shifter-26-ghz-0-0-degrees-2.92mm-pe82p5021-p.aspx>

PE82P5021 CAD Drawing

6 Bit TTL Programmable Phase Shifter, 18 GHz to 26 GHz, 360 degree Phase Range, 11.25 degree Control Step Size, +20 dBm Max Pin, 2.92mm

