



## 2 Way 2.92mm Resistive Power Divider From DC to 26.5 GHz Rated at 1 Watt

### Power Dividers Technical Data Sheet

**PE2065**

#### Features

- 2-Way Power Divider
- Resistive Design
- DC to 26.5 GHz Frequency Range
- Insertion Loss 8.5 dB Typ
- Max Power 1 Watt (CW)

#### Applications

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM

#### Description

Pasternack carries a wide selection of power dividers to fit your needs. These components are essential in many systems, allowing the combination of multiple signals or splitting of a single signal into multiple signals with equal magnitude and phase. Pasternack's resistive and Wilkinson power dividers come with excellent performance featuring minimal loss, high isolation and low VSWR. They are available in both narrow and broad bandwidths with a variety of connector types such as 2.92mm, BNC, N and SMA.

The PE2065 is a 2-way resistive power divider that operates from DC to 26.5 GHz and can handle up to 1 Watt (CW) with 8.5 dB typ insertion loss. The package interface uses 2.92mm connectors and is REACH and RoHS compliant.

#### Electrical Specifications

Design	Resistive
Number of Output Ports	2

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		26.5	GHz
Impedance		50		Ohms
Input VSWR			1.4:1	
Insertion Loss		8.5		dB
Amplitude Balance		1		dB
Phase Balance		±4		Degrees
Input Power (CW)			1	Watts

Electrical Specification Notes:  
 Insertion loss includes splitting loss.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way 2.92mm Resistive Power Divider From DC to 26.5 GHz Rated at 1 Watt PE2065](#)



## 2 Way 2.92mm Resistive Power Divider From DC to 26.5 GHz Rated at 1 Watt

### Power Dividers Technical Data Sheet

**PE2065**

#### Mechanical Specifications

##### Size

Length	0.5 in [12.7 mm]
Width	0.5 in [12.7 mm]
Height	0.38 in [9.65 mm]
Weight	0.041 lbs [18.6 g]

##### Configuration

Package Type	Connectorized
Input Connector	2.92mm Male
Output Connectors	2.92mm Female

##### Mechanical Specification Notes:

2.92mm connectors mate both electrically and mechanically with all 3.5mm and SMA connectors.

#### Environmental Specifications

##### Temperature

Operating Range	-65 to +125 deg C
-----------------	-------------------

#### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	
REACH Compliant	12/17/2015

#### Plotted and Other Data

##### Notes:

2 Way 2.92mm Resistive Power Divider From DC to 26.5 GHz Rated at 1 Watt from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way 2.92mm Resistive Power Divider From DC to 26.5 GHz Rated at 1 Watt PE2065](http://www.pasternack.com/2-way-2.92mm-resistive-power-divider-dc-to-26.5-ghz-rated-at-1-watt-pe2065)

URL: <http://www.pasternack.com/2-way-2.92-power-divider-dc-26.5-ghz-1-watts-pe2065-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE2065 CAD Drawing

2 Way 2.92mm Resistive Power Divider From DC to 26.5 GHz Rated at 1 Watt

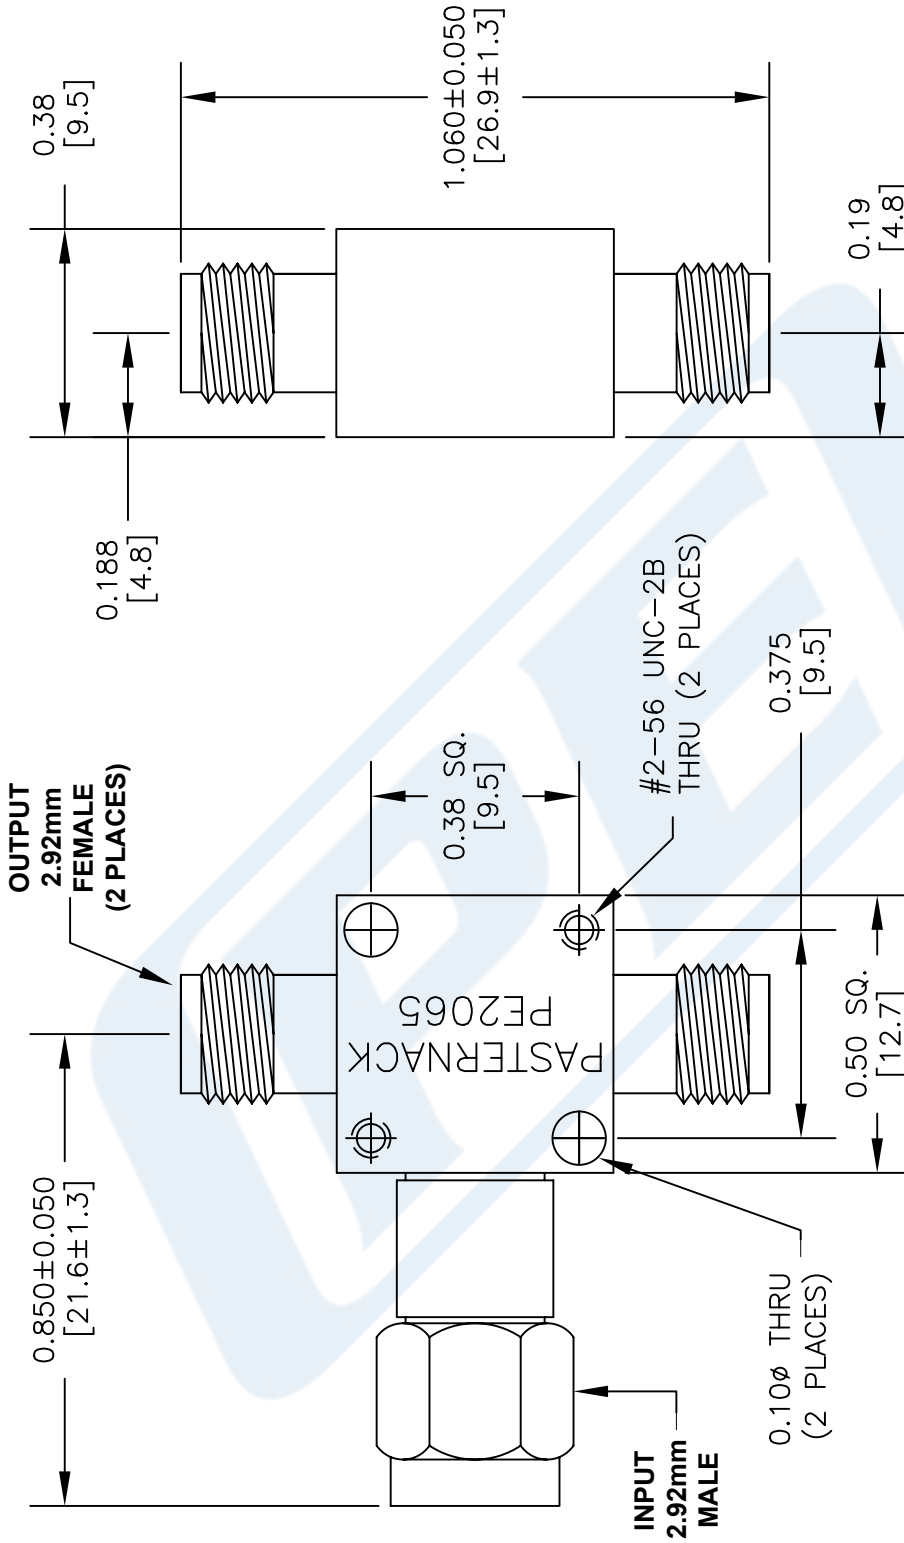

**STANDARD TOLERANCES**

DECIMAL ±0.01  
 .XX ±0.005  
 .XXX ±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

DWG TITLE

**PE2065**

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES [mm].

**PE PASTERNAK**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 040116

SCALE N/A

SIZE A

3045