


MOUNTING BRACKET INCLUDED

PART NO.		RFPT-43F-A6		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	09/11/18	JDMc

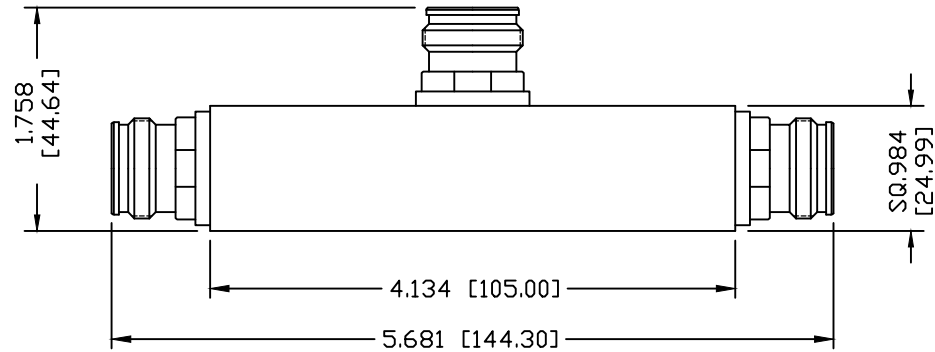

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 340-2700 MHz
 COUPLING: 6dB
 FLUCTUATE:
 340-960: ±1.2
 1710-2700: ±0.5
 POWER RATING: 200W
 VSWR:
 340-960: 1.3:1
 1710-2700: 1.25:1
 3RD INTERMODULATION: -155 dBc (RELATIVE TO CARRIER)
 3RD INTERMODULATION TEST METHOD: 2x43dBm CARRIERS
 TEMPERATURE RANGE: -35°C ~ +85°C
 APPLICATION: INDOOR/OUTDOOR
 REGULATORY COMPLIANCE/CERTIFICATIONS: RoHS/IP65

NOTES:
 ALL CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER OUTLINE DRAWING <hr/> ALL DIMENSIONS ARE REFERENCE ONLY <hr/> UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		RoHS COMPLIANT		RFconnectors <small>DIVISION OF RF INDUSTRIES, LTD.</small>		<small>7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX</small>	
DRAWN C. ZUNIGA		09/11/18		6 dB POWER TAPPER 4.3-10 FEMALE - 350-2700 MHz			
CHECKED		PROPRIETARY AND CONFIDENTIAL THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.		SIZE A	CABLE GROUP	DWG NO. RFPT-43F-A6	REV —
ORJ DRAWN C. ZUNIGA		09/11/18		SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1	