


MOUNTING BRACKET INCLUDED

PART NO.		RFPT-43F-C10		
REV	DESCRIPTION	DWN	DATE	APPROVED
—	ENGINEERING RELEASE	CZS	09/11/18	JDMc

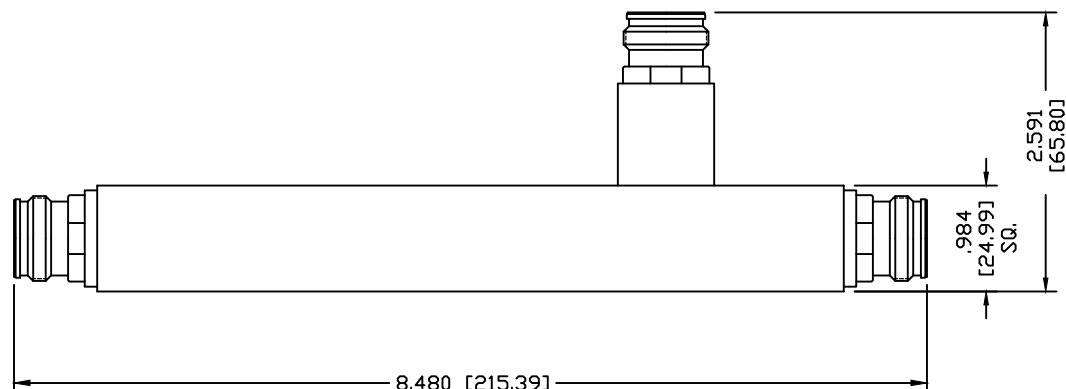

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 698–2700 MHz
 COUPLING: 10 ± 1.0 dB
 INSERTION LOSS: 0.5 ± 0.2
 VSWR: 1.35:1
 POWER RATING: 200W
 3RD INTERMODULATION: -160 dBc (RELATIVE TO CARRIER)
 3RD INTERMODULATION TEST METHOD: 2x43dBm CARRIERS
 TEMPERATURE RANGE: $-35^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 APPLICATION: INDOOR/OUTDOOR
 REGULATORY COMPLIANCE/CERTIFICATIONS: RoHS/IP65

NOTES:

ALL CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER OUTLINE DRAWING		RoHS COMPLIANT	RFconnectors DIVISION OF RF INDUSTRIES, LTD.		7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX	
ALL DIMENSIONS ARE REFERENCE ONLY						
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		PROPRIETARY AND CONFIDENTIAL THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.		10 dB POWER TAPPER 4.3-10 FEMALE - 698-2700 MHz		
DRAWN C. ZUNIGA	09/11/18	SIZE A	CABLE GROUP	DWG NO. RFPT-43F-C10	REVISION —	
CHECKED		SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1		
ORJ DRAWN C. ZUNIGA	09/11/18					