
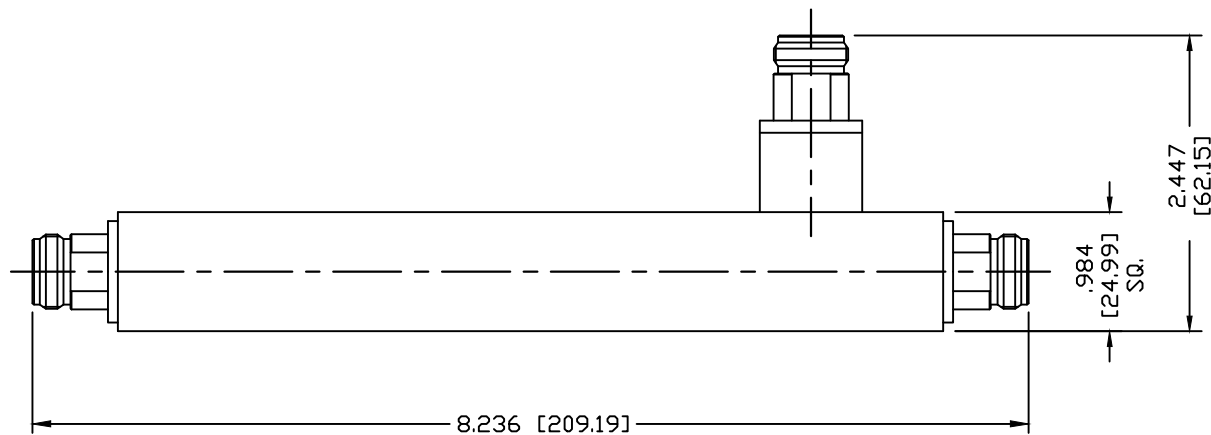


PART NO.

RFPT-NF-C10

| REV | DESCRIPTION | DWN | DATE | APPROVED |
|-----|--------------------------|-----|----------|----------|
| A | UPDATED MOUNTING BRACKET | CZS | 11/28/18 | JDMc |

MOUNTING BRACKET INCLUDEDSPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 698–2700 MHz
 COUPLING: 10 ± 1.0 dB
 INSERTION LOSS: 0.5 ± 0.2
 VSWR: 1.35:1
 POWER RATING: 200W
 3RD INTERMODULATION: -155 dBc (RELATIVE TO CARRIER)
 3RD INTERMODULATION TEST METHOD: 2×43 dBm CARRIERS
 TEMPERATURE RANGE: $-35^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 APPLICATION: INDOOR/OUTDOOR
 REGULATORY COMPLIANCE/CERTIFICATIONS: RoHS/IP65

NOTES:

ALL CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

| | |
|------------------------|----------|
| DRAWN C. ZUNIGA | 11/28/18 |
| CHECKED | |
| ORJ DRAWN C. ZUNIGA | 09/18/18 |

RoHS
COMPLIANT

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES. ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.

RFconnectors
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

10 dB POWER TAPPER
N FEMALE - 698-2700 MHz

| SIZE | CABLE GROUP | DWG NO. | REVISION |
|---------------|---------------------------|--------------------|----------|
| A | | RFPT-NF-C10 | A |
| SCALE: NTS | ENGINEERING ID: 000000 | SHEET 1 OF 1 | |