

SMA PIN Diode Switch SPDT From 2 GHz to 26.5 GHz Rated at +30 dBm

The FMSW2017 is an SPDT REFLECTIVE PIN DIODE SWITCH that operates over a wide frequency band from 2 to 26.5 GHz. Electrical performance includes max. insertion loss of 3dB, max return loss of -7dB, min. isolation of 30dB, and max. switching speed of 100nsec. TTL-compatible driver circuitry is included for accurate logic control. The design requires dual voltage controls of +5 Vdc and -5 Vdc, with an operational temperature range of -30°C to +60°C. External connectors include solder terminals and SMA female connectors.



Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	2		26.5	GHz
Impedance		50		Ohms
Return Loss			-7	dB
Insertion Loss			3	dB
Isolation	30			dB
Switching Time			100	ns
Input Power (CW)			1	Watts
Positive Operating Voltage		5		V
Negative Operating Voltage		-5		V
Operating Temperature	-30		+60	deg C

Electrical Specification Notes:
 Specified switching time includes TTL driver delay.

Mechanical Specifications

Length	1 in [25.4 mm]
Width	1.2 in [30.48 mm]
Height	0.6 in [15.24 mm]
Package Type	Connectorized Module
Design	SPDT, Reflective
RF Connector	SMA Female
Control Connector	SMA Female

Environmental Specifications

Temperature

Operating Range	-30 to +60 deg C
ESD Sensitivity	ESD Sensitive Material. Transport material in Approved ESD bags. Handle only in ESD Workstation.



Compliance Certifications (visit www.FairviewMicrowave.com for current document)

Plotted and Other Data

Notes:

Features:



- SPDT Reflective Switch
- 2 GHz to 26.5 GHz
- Insertion Loss 3 dB max
- Isolation 30 dB min
- Power Input +30 dBm CW max


Applications:

- Test & Measurement
- Military Communication
- Commercial Communication

Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Typical Performance Data

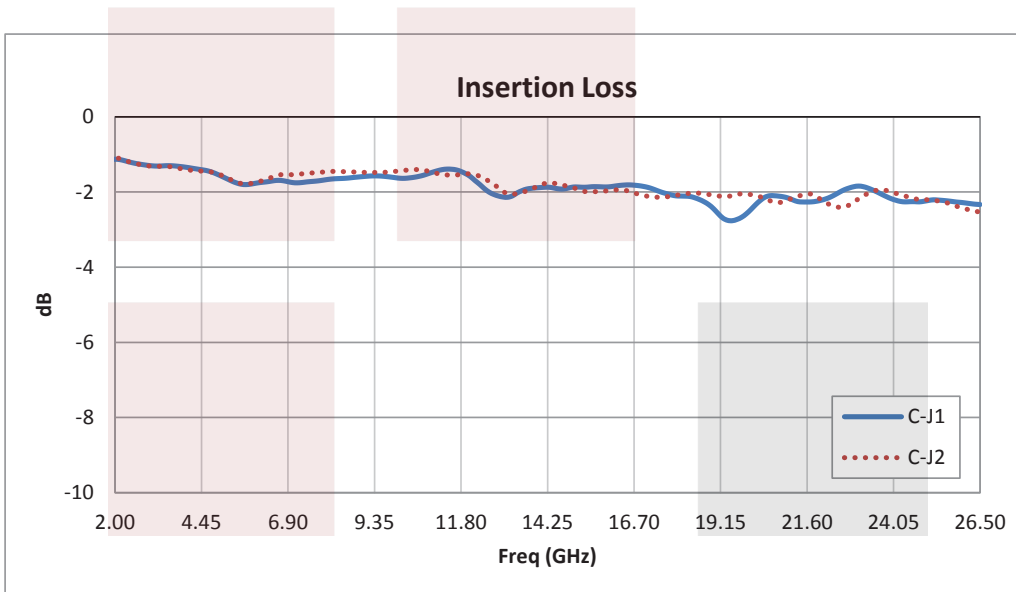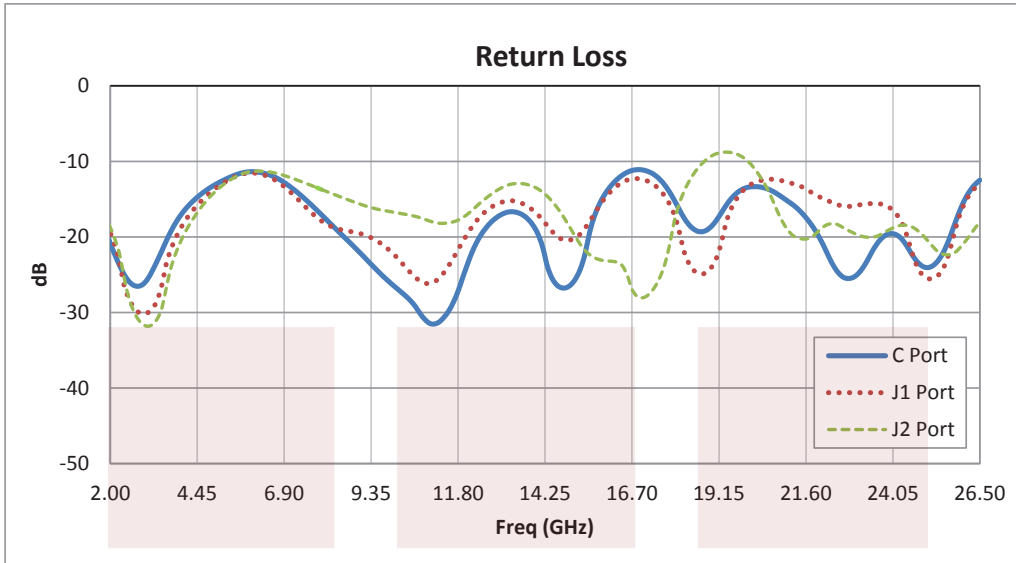

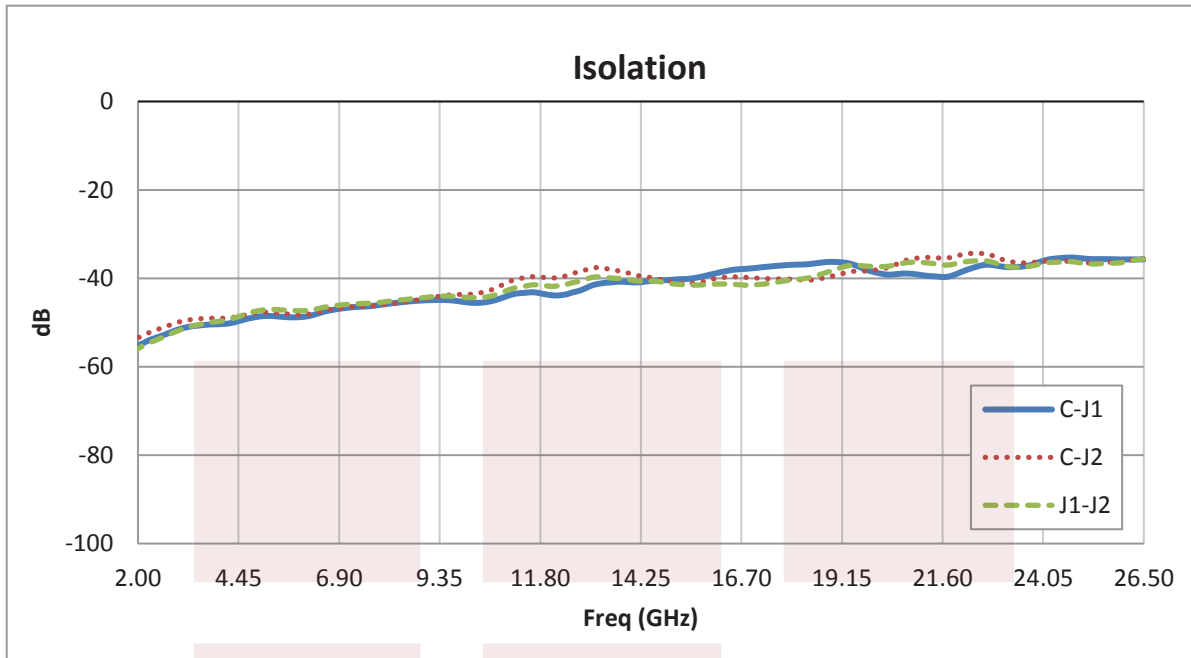


SMA PIN Diode Switch SPDT From 2 GHz to 26.5 GHz Rated at +30 dBm from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [SMA PIN Diode Switch SPDT From 2 GHz to 26.5 GHz Rated at +30 dBm FMSW2017](http://www.fairviewmicrowave.com/sma-pin-diode-switch-spdt-2-26.5-ghz-rated-30-dbm-fmsw2017-p.aspx)

URL: <http://www.fairviewmicrowave.com/sma-pin-diode-switch-spdt-2-26.5-ghz-rated-30-dbm-fmsw2017-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

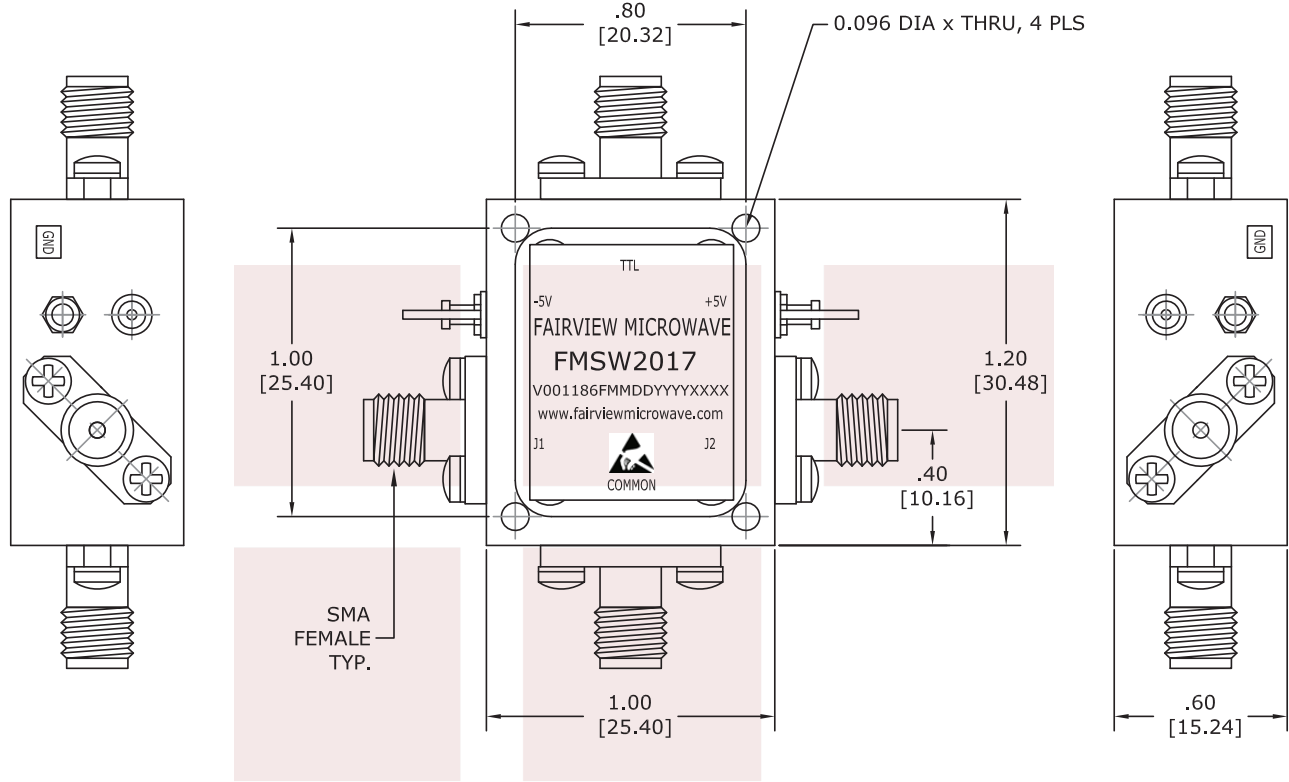

LOGIC TABLE		
TTL LOGIC	LOW LOSS	ISOLATION
HIGH	C-J2	C-J1
LOW	C-J1	C-J2

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: inches
TOLERANCES ARE: [mm]
.XX ± .01 [±.25]
.XXX ±.001 [±.025]

* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE SMA PIN Diode Switch SPDT From 2 GHz to 26.5 GHz Rated at +30 dBm	DWG NO FMSW2017	CAGE CODE 3FKR5			
CAD FILE 082615	SHEET	SCALE N/A	SIZE A	2233	