

SMA SPDT PIN Diode Switch from 20 MHz to 500 MHz Rated at 150 Watts

The FMSW2039 is a single pole double throw (SPDT) PIN diode switch that operates over the frequency range of 20 MHz to 500 MHz. The 50 ohm design supports TTL control logic and is rated up to 150 watt average RF input power. Typical performance includes 0.5 dB insertion loss and greater than 50 dB isolation. Switching speed is 40 microseconds with 1.4:1 typical VSWR and an operating voltage of +15 Vdc with 250 mA nominal current. The rugged package design supports SMA Female RF input/output connectors. The Switch design is highly reliable with an operational temperature of -20°C to +70°C.

Electrical Specifications

TTL Control Logic

Off/Isolation: "0" 0 to V
 On/Low Loss: "1"

Description	Min	Typ	Max	Units
Frequency Range	20		500	MHz
Impedance		50		Ohms
VSWR			1.4:1	
Insertion Loss			0.5	dB
Isolation	50			dB
Switching Time			40	us
Input Power (CW)			150	Watts
Positive Operating Voltage		15		Vdc
Positive Operating Voltage 2		5		Vdc
Current @ 15 Vdc		250		mA
Current @ 5 Vdc		40		mA
Operating Temperature	-20		+70	deg C

Mechanical Specifications

Weight 0.547 lbs [248.12 g]
 Design Reflective, SPDT
 RF Connector SMA Female

Environmental Specifications

Temperature

Operating Range -20 to +70 deg C
 Storage Range -55 to +85 deg C

ESD Sensitivity

ESD Sensitive Material. Transport material in Approved ESD bags. Handle only in ESD Workstation.



Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:



Features:


- SPDT High Power PIN Diode Switch
- 150 watt (CW)
- Reflective Design
- 20 to 500 MHz Bandwidth
- Insertion loss: 0.5 dB max
- Isolation: 50 dB min
- 50 Ohms
- Switching Speed: 40 microseconds
- DC voltage: +15 Vdc
- SMA female connectors
- TTL Control Logic


Applications:

- Electronic Warfare
- Test & Measurement
- Military and Wireless Communications Systems
- Military & Space
- Radar

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Typical Performance Data

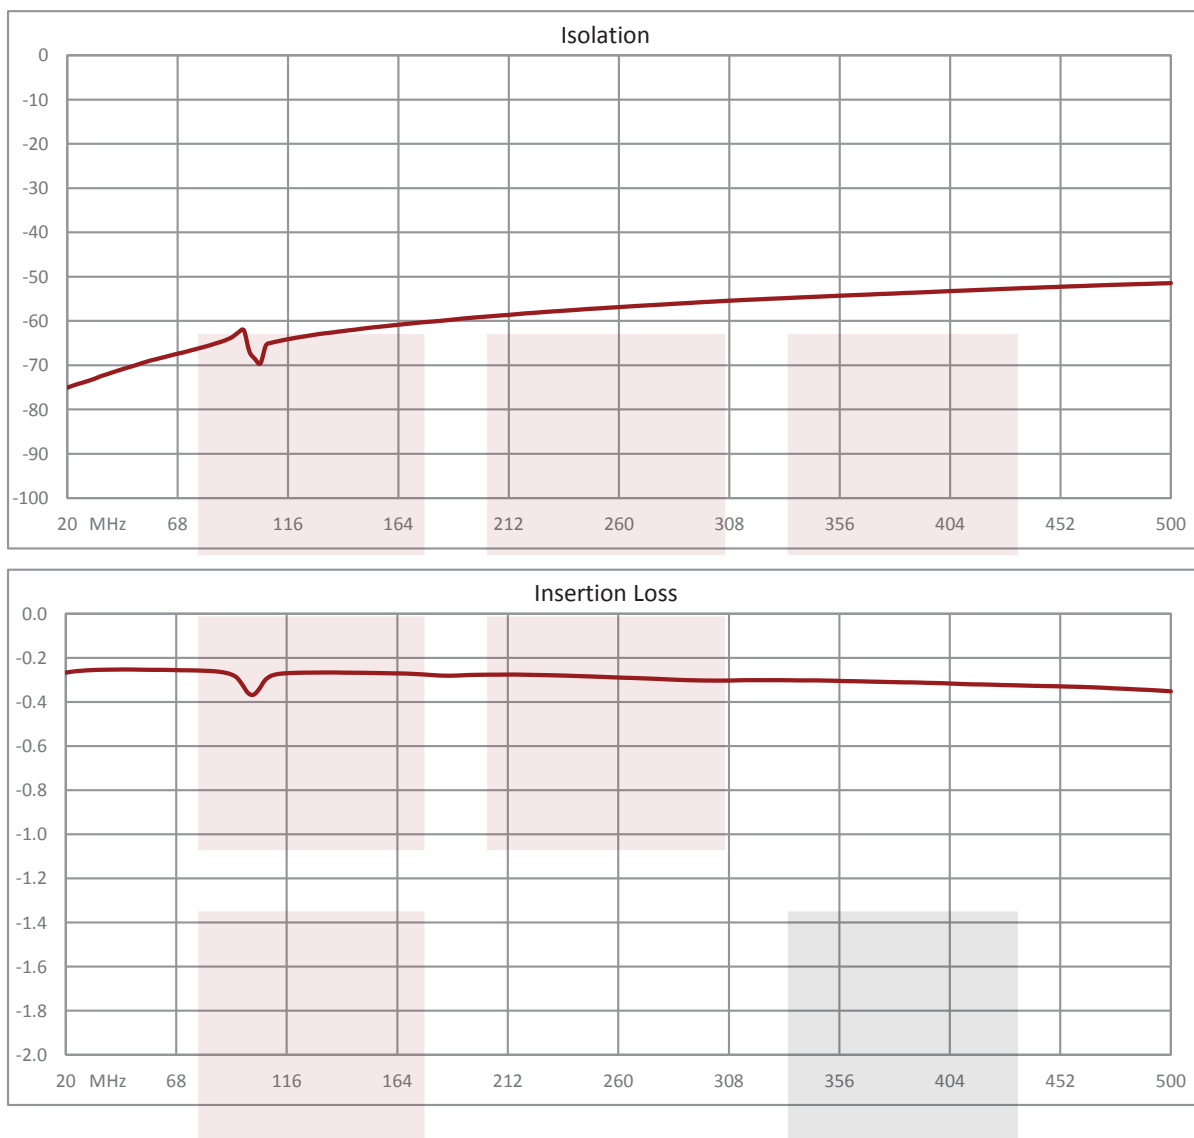

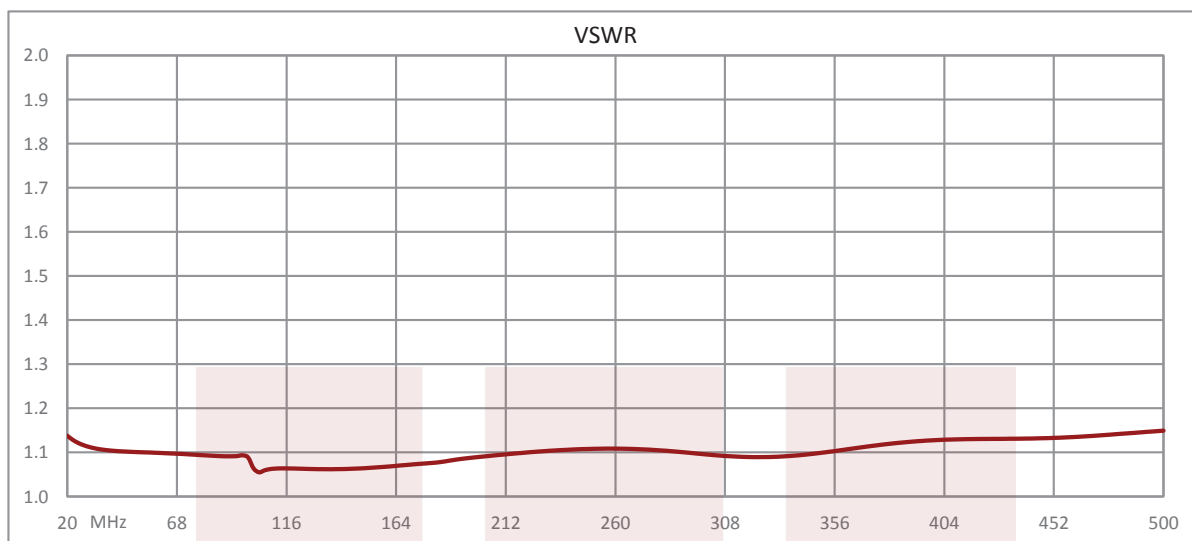


SMA SPDT PIN Diode Switch from 20 MHz to 500 MHz Rated at 150 Watts from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [SMA SPDT PIN Diode Switch from 20 MHz to 500 MHz Rated at 150 Watts FMSW2039](https://www.fairviewmicrowave.com/sma-spdt-pin-diode-switch-500-mhz-150-watts-fmsw2039-p.aspx)

URL: <https://www.fairviewmicrowave.com/sma-spdt-pin-diode-switch-500-mhz-150-watts-fmsw2039-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

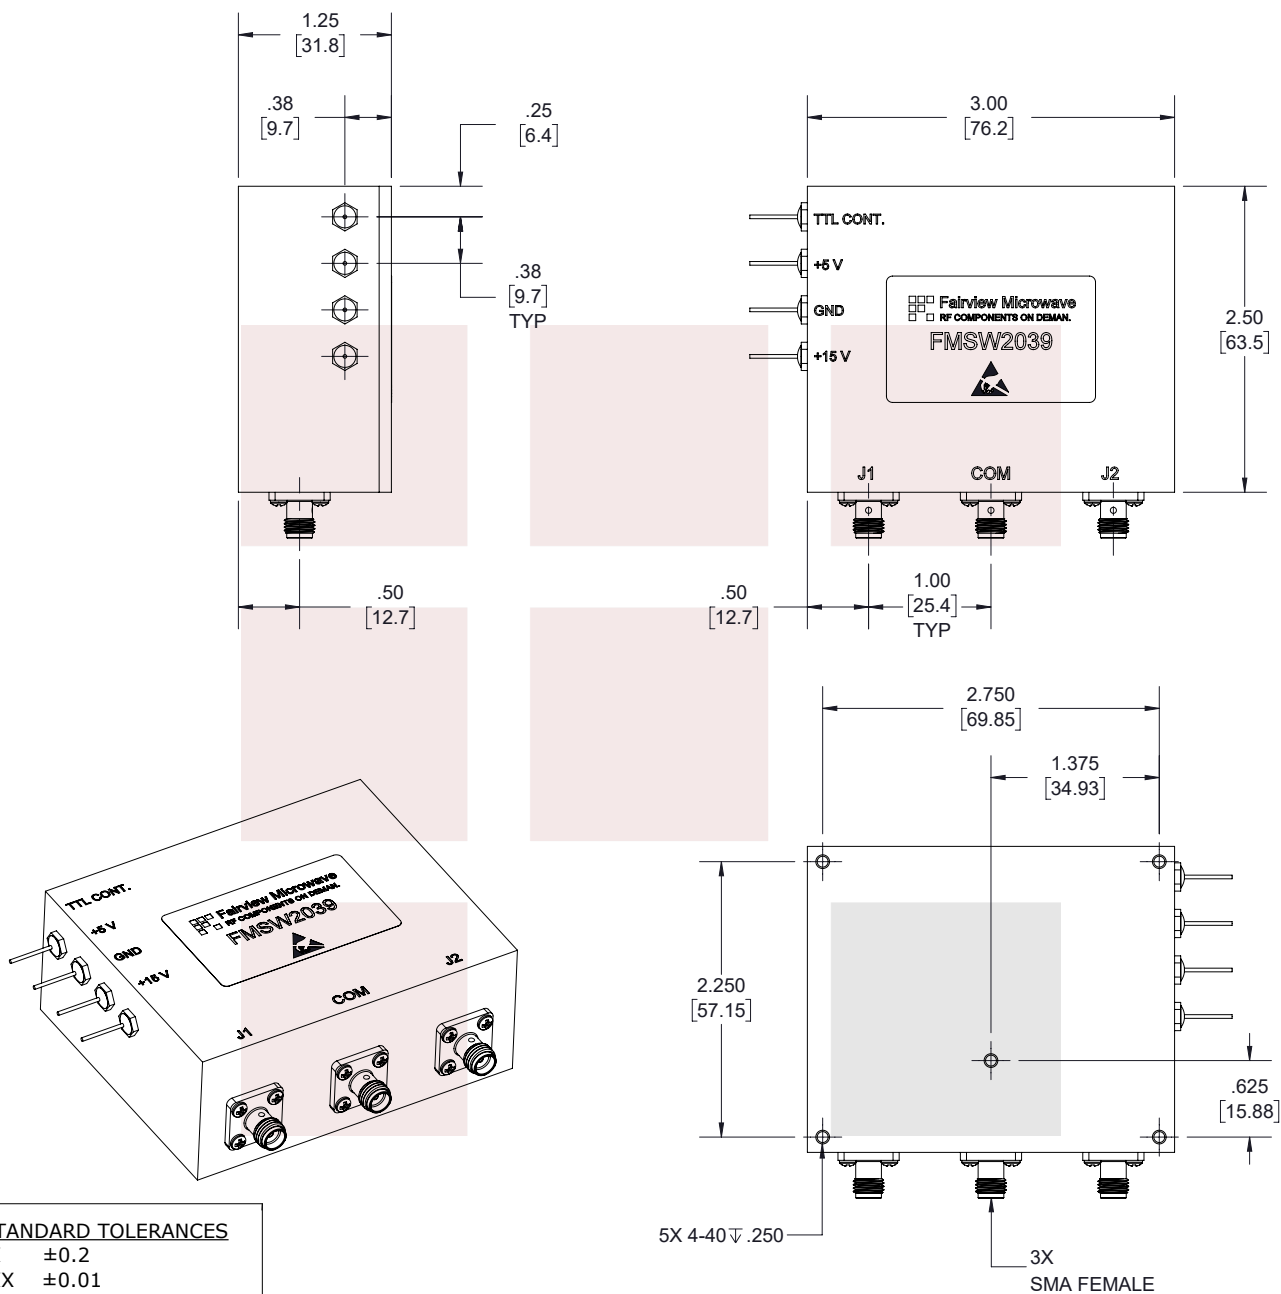

STANDARD TOLERANCES

.X ±0.2
.XX ±0.01
.XXX ±0.005

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES



NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

TITLE
SMA SPDT PIN Diode Switch from 20 MHz to 500 MHz
Rated at 150 Watts

DWG NO	FMSW2039	CAGE CODE	3FKR5
CAD FILE	08/07/18	SHEET	1 OF 1
SCALE	N/A	SIZE	A
			7361