

Transfer, Electromechanical Relay Latching Switch,
 DC to 43 GHz, 12VDC, 5W, Indicators, TTL, Diodes,
 Self Cut-Off, Solder Terminals, 2.92mm

Electromechanical Relay Switches Technical Data Sheet

PE71S7298

Features

- Transfer Electromechanical Relay Switch
- DC to 43 GHz Frequency Range
- Latching Actuator with Self Cut-Off
- 2M Lifecycle Rating
- TTL Logic Control
- Indicators
- Suppression Diodes
- Insertion Loss 0.6 dB typ
- Isolation > 80 dB typ
- VSWR as low as 1.2:1 max
- Solder Terminal Pins for DC Control
- +12 Volt DC Bias
- 2.92mm Female Connectors
- -25°C to +65°C Operating Temperature
- Up to 5 Watt Average Power Handling
- 50 Ohm Design
- Hot Switching Capability - Consult Factory
- S-Parameter Data available upon request
- Rugged Design meets Mil-STD-202 Test Conditions

Applications

- Aerospace & Defense
- Test & Measurement
- Microwave Radio Systems
- Military & Commercial Communication Systems
- Research & Development
- SATCOM
- Wireless Communications
- Enterprise
- IoT

Description

The PE71S7298 is a Transfer electromechanical relay switch that operates across an ultra wide frequency range from DC to 43 GHz and can handle up to 5 Watts of Average Power in a break before make condition. The 50 Ohm design has a Latching Actuator with Self Cut-Off that magnetically latches in place after the control voltage is removed. For power sensitive applications, this is the best actuator option. Additional features include TTL logic control, Indicators to monitor the switch position, and Suppression Diodes which limit voltage spikes or reverse current. Impressive typical performance includes 0.6 dB insertion loss and isolation greater than 80 dB. This switch requires +12 Vdc bias voltage and operates over a temperature range of -25°C to +65°C. The rugged and compact package assembly supports 2.92mm female connectors and solder terminal pins for DC control. And for highly reliable operation, the model is guaranteed to meet MIL-STD-202 environmental test conditions for shock and random vibration.


Electrical Specifications (TA = 25°C, DC Voltage = 12 Vdc)

Switch Type
 Actuator Type
 Actuator Options
 TTL Control

Transfer
 Latching
 Indicators, TTL Logic, Diodes, Self Cut Off
 on: 2.4 to 5 Volts
 off: 0 to 0.8 Volts

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		43	GHz
Operating Voltage	11	12	13	Volts
Actuating Set Current			300	mA
VSWR		1.4:1	2:1	
Insertion Loss		0.6	1.3	dB

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Transfer, Electromechanical Relay Latching Switch, DC to 43 GHz, 12VDC, 5W, Indicators, TTL, Diodes, Self Cut-Off, Solder Terminals, 2.92mm PE71S7298](#)



Transfer, Electromechanical Relay Latching Switch,
DC to 43 GHz, 12VDC, 5W, Indicators, TTL, Diodes,
Self Cut-Off, Solder Terminals, 2.92mm

Electromechanical Relay Switches Technical Data

PE71S7298

Isolation	50	85	dB
Input Power		5	Watts
Switching Time		20	ms

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 6	6 to 12.4	12.4 to 26.5	26.5 to 40	40 to 43	GHz
VSWR, Max	1.2:1	1.3:1	1.4:1	1.8:1	2:1	
Insertion Loss, Max	0.2	0.4	0.7	1	1.3	dB
Isolation, Min	80	75	65	50	50	dB

Mechanical Specifications

Size

Length	2 in [50.8 mm]
Width/Diameter	2.16 in [54.86 mm]
Height	1.26 in [32 mm]
Weight	0.26 lbs [117.93 g]
Finish	Electroless Nickel

Connectors

RF Connector Type	2.92mm Female
Control Connector	Solder Terminals

Environmental Specifications

Temperature

Operating Range	-25 to +65 deg C
Storage Range	-55 to +100 deg C

Shock

MIL-STD-202 Method 213, Condition D, 500G (non operational)

Vibration


MIL-STD-202 Method 204, Condition D, 10G RMS (non operational)

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Transfer, Electromechanical Relay Latching Switch, DC to 43 GHz, 12VDC, 5W, Indicators, TTL, Diodes, Self Cut-Off, Solder Terminals, 2.92mm PE71S7298](#)




Transfer, Electromechanical Relay Latching Switch,
DC to 43 GHz, 12VDC, 5W, Indicators, TTL, Diodes,
Self Cut-Off, Solder Terminals, 2.92mm


Electromechanical Relay Switches Technical Data

PE71S7298

Typical Performance Data

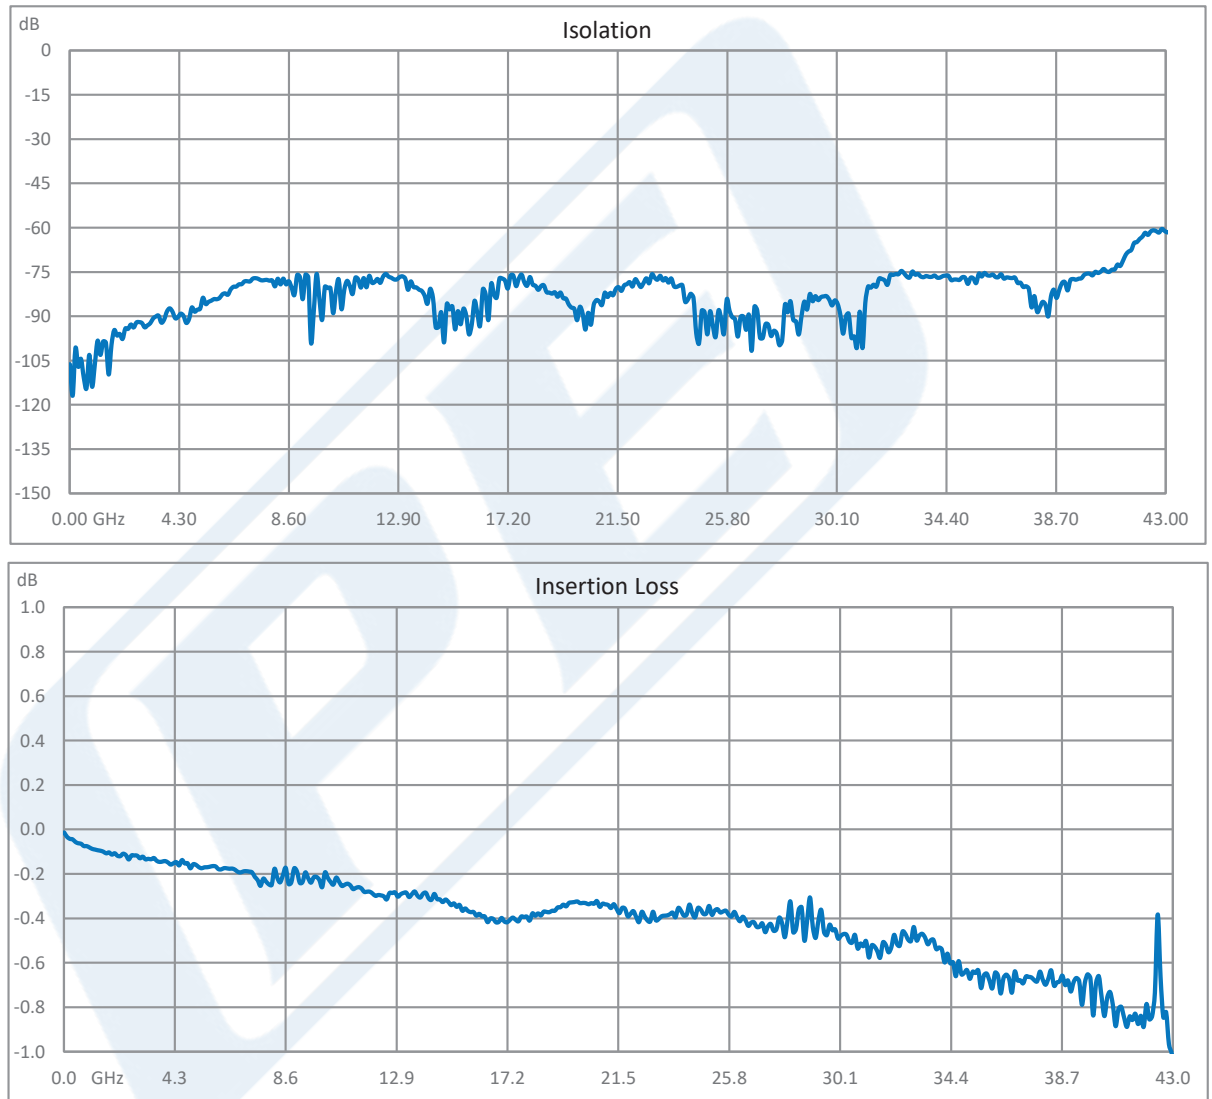


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Transfer, Electromechanical Relay Latching Switch, DC to 43 GHz, 12VDC, 5W, Indicators, TTL, Diodes, Self Cut-Off, Solder Terminals, 2.92mm PE71S7298](#)




Transfer, Electromechanical Relay Latching Switch,
DC to 43 GHz, 12VDC, 5W, Indicators, TTL, Diodes,
Self Cut-Off, Solder Terminals, 2.92mm

Electromechanical Relay Switches Technical Data

PE71S7298

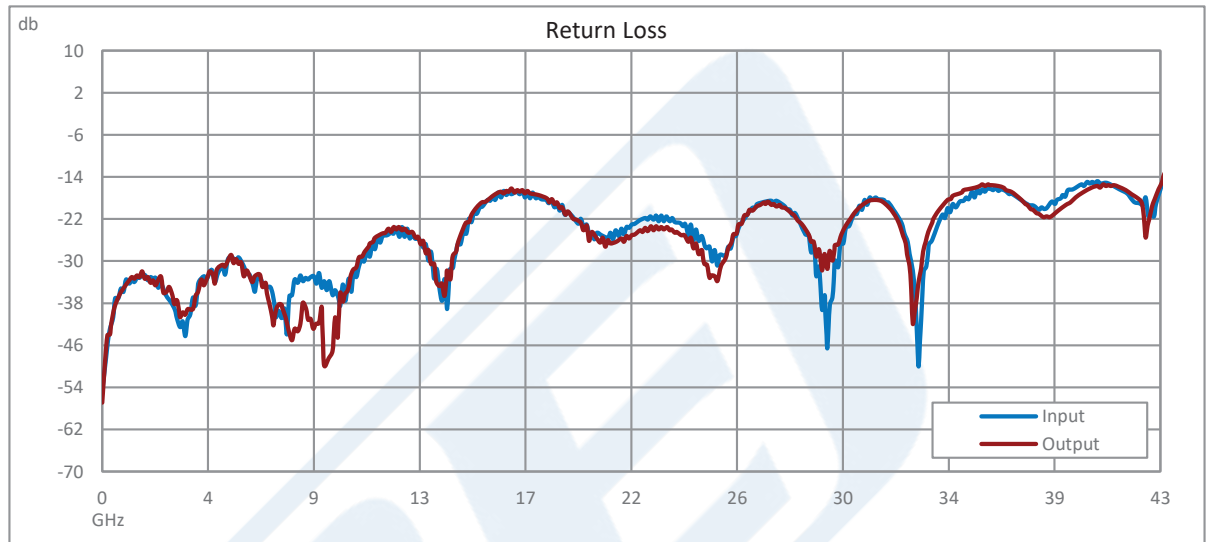

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Transfer, Electromechanical Relay Latching Switch, DC to 43 GHz, 12VDC, 5W, Indicators, TTL, Diodes, Self Cut-Off, Solder Terminals, 2.92mm PE71S7298](#)




Transfer, Electromechanical Relay Latching Switch,
DC to 43 GHz, 12VDC, 5W, Indicators, TTL, Diodes,
Self Cut-Off, Solder Terminals, 2.92mm

Electromechanical Relay Switches Technical Data

PE71S7298

Power Handling vs. Frequency

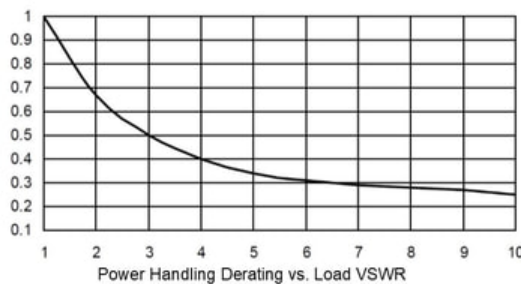


Power handling chart and derating curves based on the following conditions:

- Ambient temperature: 40°C or less
- Altitude: Sea level
- Load VSWR: 1.20:1 Maximum
- Relative Humidity: 40-50%
- Cold switching: RF signal off

Note: specifications subject to change without notice

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Transfer, Electromechanical Relay Latching Switch, DC to 43 GHz, 12VDC, 5W, Indicators, TTL, Diodes, Self Cut-Off, Solder Terminals, 2.92mm PE71S7298](#)



Transfer, Electromechanical Relay Latching Switch,
DC to 43 GHz, 12VDC, 5W, Indicators, TTL, Diodes,
Self Cut-Off, Solder Terminals, 2.92mm

Electromechanical Relay Switches Technical Data

PE71S7298

Transfer, Electromechanical Relay Latching Switch, DC to 43 GHz, 12VDC, 5W, Indicators, TTL, Diodes, Self Cut-Off, Solder Terminals, 2.92mm from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Transfer, Electromechanical Relay Latching Switch, DC to 43 GHz, 12VDC, 5W, Indicators, TTL, Diodes, Self Cut-Off, Solder Terminals, 2.92mm PE71S7298](https://www.pasternack.com/transfer-electromechanical-relay-latching-switch-43-ghz-12v-indicators-ttl-diodes-self-cut-off-2.92mm-pe71s7298-p.aspx)

URL: <https://www.pasternack.com/transfer-electromechanical-relay-latching-switch-43-ghz-12v-indicators-ttl-diodes-self-cut-off-2.92mm-pe71s7298-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE71S7298 CAD Drawing

Transfer, Electromechanical Relay Latching Switch, DC to 43 GHz, 12VDC, 5W, Indicators, TTL, Diodes, Self Cut-Off, Solder Terminals, 2.92mm

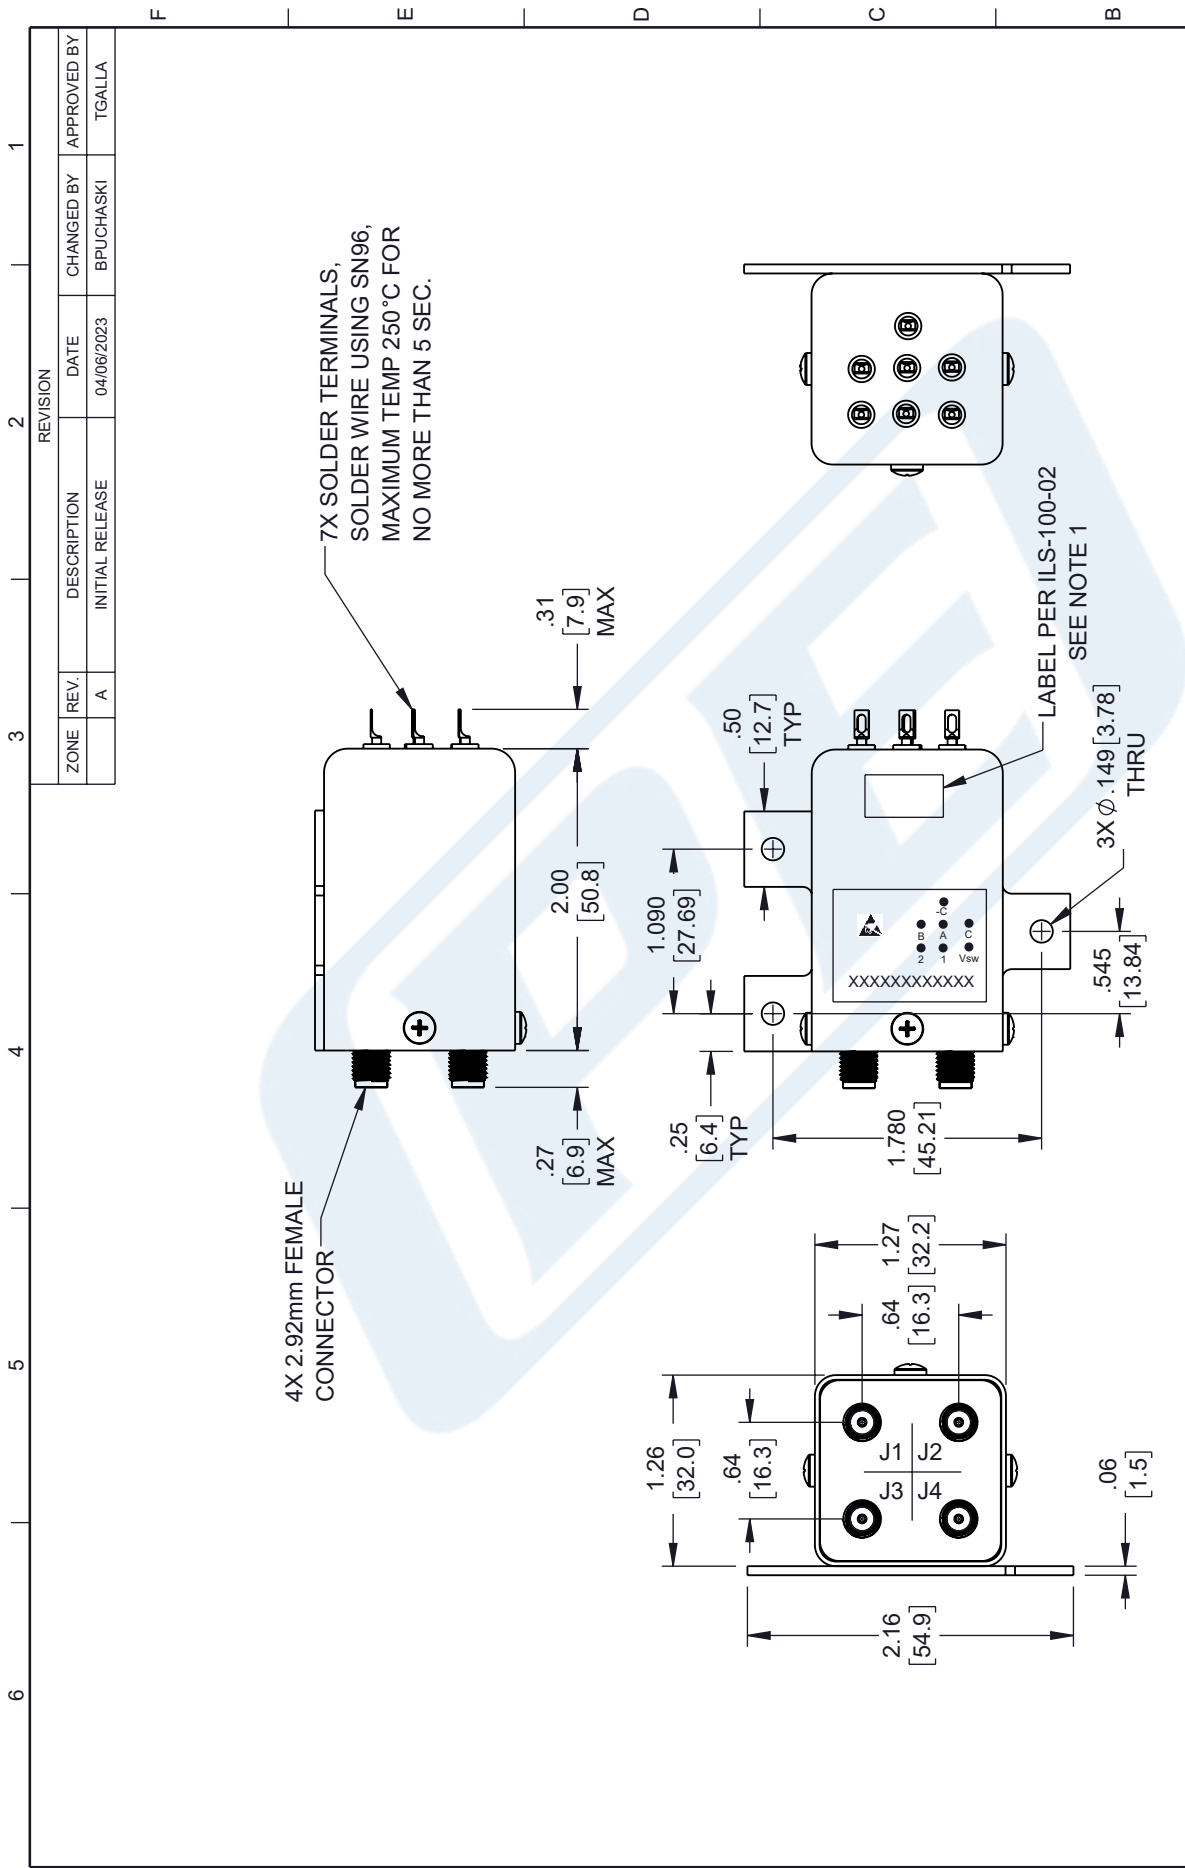

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS		PE PASTERNAK an INFINITE[®] brand		 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES: X ± .2 [.5] FRACTIONS XX ± .02 [.5] ± 1/32 XXX ± .005 [.13] ANGLES ± 1° CABLE LENGTH TOLERANCES: ≤12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920		SCALE: NONE SHEET: 1 OF 2	
NOTES: 1. LABEL PER ILS-100-02 FOR INTERNE REFERENCE ONLY LABEL LOCATION FOR REFERENCE ONLY		DESCRIPTION: TRAN, latching, 43GHz, 2.92mm, 12VDC, indicators, TTL, diodes, SCO, solder terminal			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.		SIZE: A CAGE CODE: 53919 DRAWN BY: BPUCHASKI		ITEM NO.: PE71S7298	
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE				REV: A	

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	
TOLERANCES: X = ±.2 [5] XX = ±.02 [5] XXX = ±.005 [13]	FRACTIONS ± 1/32 ANGLES ± 1°
CABLE LENGTH TOLERANCES: ≤17 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE	


NOTES:

- LABEL PER ILS-100-02 FOR INTERNAL REFERENCE ONLY
LABEL LOCATION FOR REFERENCE ONLY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PE71S7298 CAD Drawing

Transfer, Electromechanical Relay Latching Switch, DC to 43 GHz, 12VDC, 5W,
Indicators, TTL, Diodes, Self Cut-Off, Solder Terminals, 2.92mm

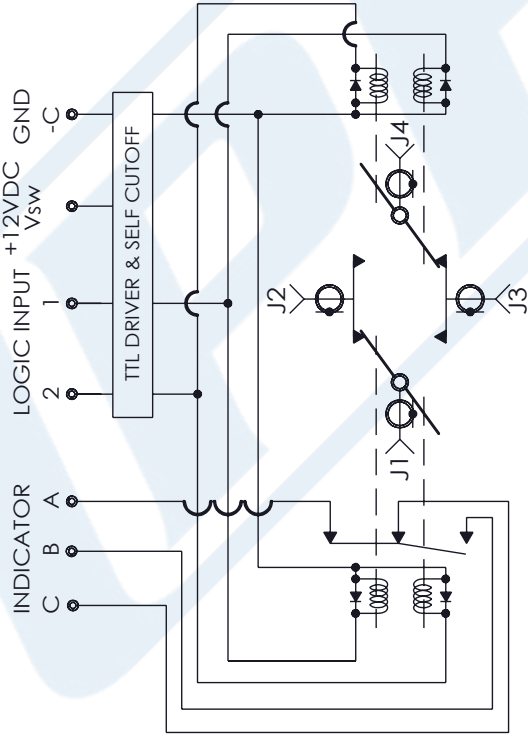

OPERATIONAL			
LOGIC TABLE			
TERMINALS	RF PORTS	IND. PATH	
1	2		
0	0	NO CHANGE	NO CHANGE
0	1	J1-J3, J2-J4	B-C
1	0	J1-J2, J3-J4	A-C
1	1	FORBIDDEN	FORBIDDEN

SCHEMATIC



Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION

TRAN, latching, 43GHz, 2.92mm, 12VDC, indicators, TTL, diodes,
SCO, solder terminal

SIZE A CAGE CODE 53919 DRAWN BY BPUCHASKI ITEM NO. PE71S7298 REV A

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = ±.2 [.5] FRACTIONS
XX = ±.02 [.5] ANGLES ± 1°
XXX = ±.005 [.13]
CABLE LENGTH TOLERANCES:
≤12 [305] = ±1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.