
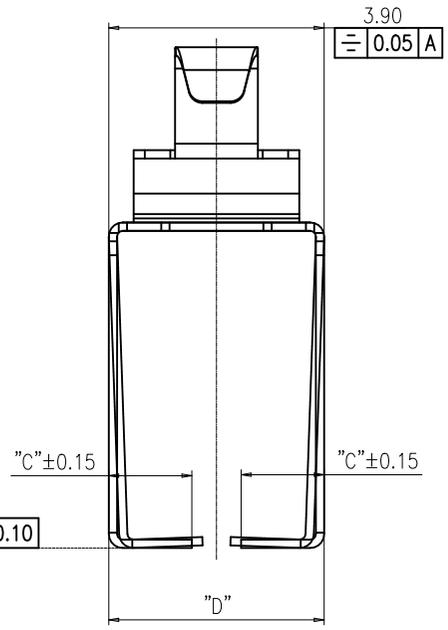
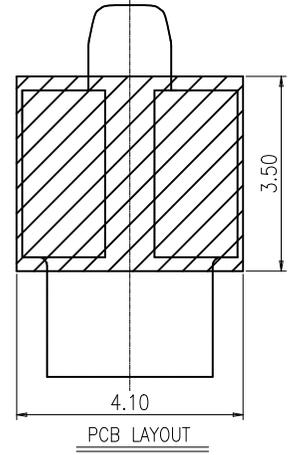
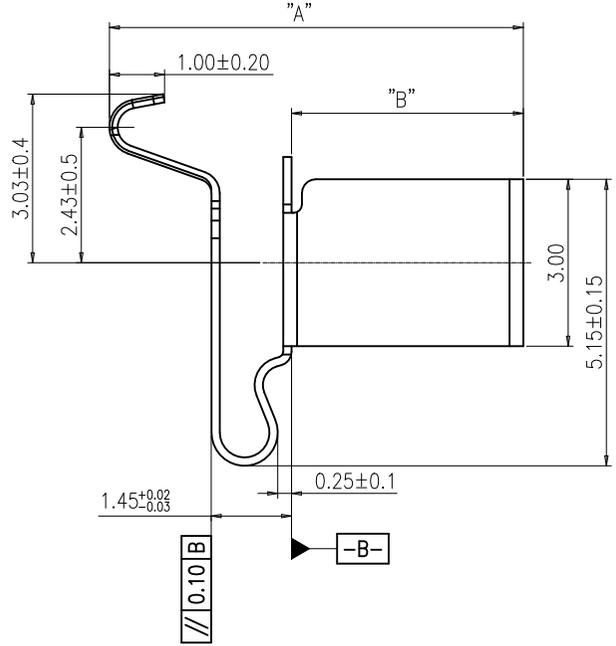


REV.	ECR/ECN No.	DESCRIPTION	DRAWN/DATE	CHECKED/DATE	APPROVED/DATE
F		UPDATE FRAME	Staven 2020-11-13	Staven 2020-11-13	Biao 2020-11-13
G	ECN2022112	UPDATE CPK SYMBOLS	Abner 2022-07-20	Staven 2022-07-20	Sam 2022-07-20

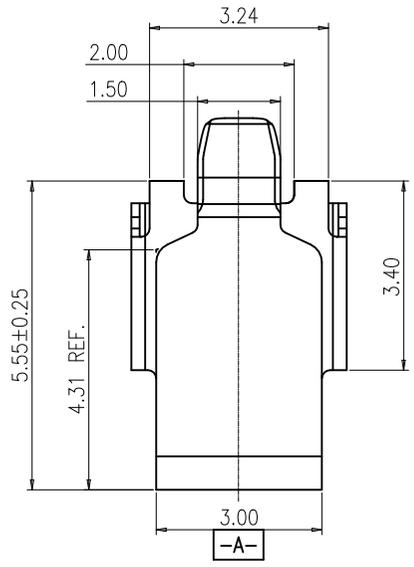

- NOTES:
- 1、 MATERIAL: SUS 304-H T=0.15mm;
 - 2、 ALLOW BURR 0.03mm Max.;
 - 3、 PLATING: Au 2u" SURFACE PLATING OVER CONTACT AREAS, Au 2u" SURFACE PLATING OVER SOLDER AREAS, Ni 40-120u" UNDER PLATING OVER ALL.
 - 4、 "▼" THE SYMBOL IS REPRESENTED AS CPK AND \bar{X} -R.

TABLE:

PART NUMBER	A	B	C	D
Z00D-4G7L1-11000	4.8 ^{+0.3} _{-0.05}	1.5 ^{+0.0} _{-0.3}	1.50	3.90 ⁺⁰ _{-0.20}
Z007-4G7L1-11000	5.2 ^{+0.3} _{-0.05}	1.9 ^{+0.0} _{-0.3}	1.05	3.90 ⁺⁰ _{-0.20}
Z00C-4G7L1-11000	7.5 ^{+0.3} _{-0.05}	4.2 ^{+0.0} _{-0.3}	1.50	3.90 ⁺⁰ _{-0.20}
Z00F-4G7L1-11000	9.0 ^{+0.3} _{-0.05}	5.7 ^{+0.0} _{-0.3}	0.80	3.90 ⁺⁰ _{-0.5}
Z00N-4G7L1-11000	6.3 ^{+0.3} _{-0.3}	3.0±0.15	1.50	3.90±0.15
Z00E-4G7L1-11000	4.0 ^{+0.3} _{-0.3}	0.7±0.15	1.50	3.90±0.15
Z00X-4G7L1-11000-E000	5.6 ^{+0.3} _{-0.3}	2.3±0.15	1.50	3.90±0.15


UNLESS OTHERWISE SPECIFIED TOLERANCES		ANGLE OF PROJECTION		 Amphenol Aorora Technology (Huizhou) Co.,Ltd	
X.	±0.30	X. *	± 5'		
X.X	±0.25	X.X *	± 4'	DOC TYPE: Customer Drw	
X.XX	±0.20	X.XX *	± 3'	DRAWN DATE: Abner 2022-07-20	
X.XXX	±0.15	X.XXX *	± 2'	DESIGN DATE: Abner 2022-07-20	
LINEAR DIMS		ANGLES DIMS		CHECKED DATE: Staven 2022-07-20	
DWG NO.: A-S0198		APPROVED DATE: Sam 2022-07-20		TITLE: SPRING	
MATERIAL	SEE NOTES	FINISHED	SEE NOTES	SIZE: A4	PART NUMBER: SEE TABLE
				SCALE: 1:1	UNIT: mm
				SHEET 1 OF 1	



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of AOR. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of AOR. © 2019 AOR

1:PACKING INTO REEL

PULL OUT DIRECTION

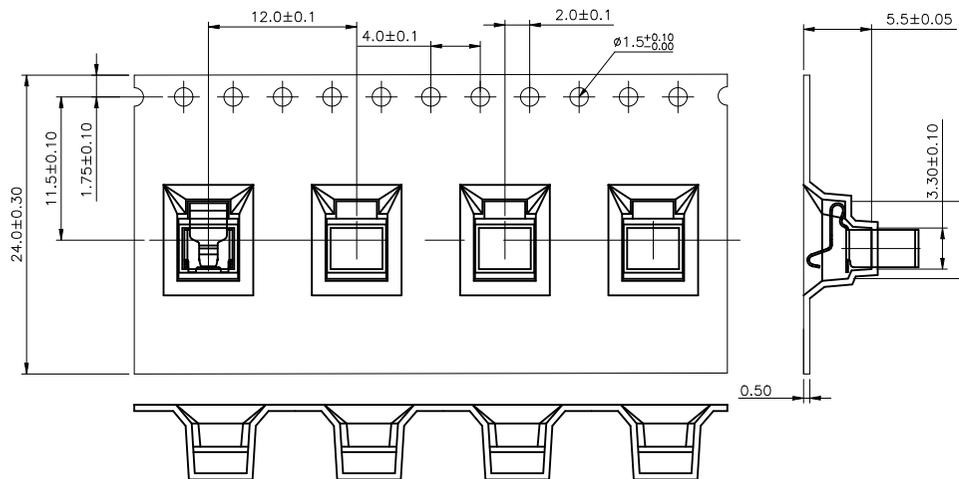

2:PACKING INTO OUTER BOX

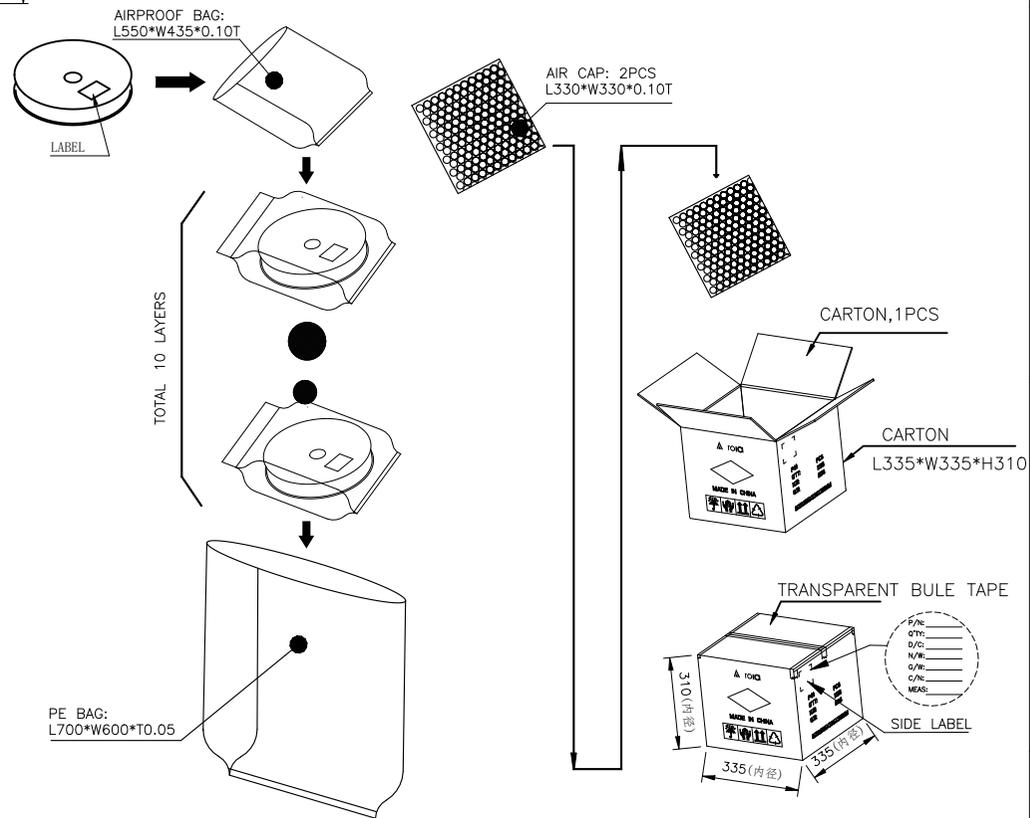


TABLE:

PART NO.	PCS/REEL	N REEL/BOX (TOL PCS)
Z007-4G7L1-11000	900	10REEL/BOX (9000pcs)
Z01P-4G7L1-11000-E000		

A

B

C

D

A

B

C

D



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of AOR. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of AOR. © 2019 AOR

NOTES:

- MATERIAL:
 - CARRY TAPE:HIPS,T=0.50mm,CLEAR
 - REEL:HIPS,BLUE.
 - SHIM:PE,CLEAR.
- PRIMARY PACKING:900PCS/REEL.
- SECONDARY PACKING:10 REELS/CARTON ("TOTAL"=10*900/CARTON).
- PEELING RESISTANCE: 0.1N~0.7N(10~70gf);
PEELING ANGLE: 165°~180°;
PEELING SPEED: 300mm/minutes.

UNLESS OTHERWISE SPECIFIED TOLERANCES			
X.	±0.15	X. *	± 1'
X.X	±0.10	X.X *	± 0.5'
X.XX	±0.05	X.XX *	± 0.5'
X.XXX	±0.03	X.XXX *	± .1'
LINEAR DIMS		ANGLES DIMS	
DWG NO.: A-H0108			
MATERIAL	SEE NOTES		
FINISHED	SEE NOTES		

ANGLE OF PROJECTION	
DOC TYPE	PACKING DWG.
DRAWN DATE	Abner 2022-07-20
DESIGN DATE	Abner 2022-07-20
CHECKED DATE	Staven 2022-07-20
APPROVED DATE	Sam 2022-07-20

Amphenol AORORA	
Amphenol Aorora Technology (Huizhou) Co.,Ltd	
TITLE: SPRING H5.2	
SIZE: A4	PART NUMBER: SEE TABLE
SCALE: 1:1	UNIT: mm
SHEET: 1	OF: 1
REV. D	