


- ❖ Low-Loss RF Filter for Mobile Phone Band 41 Systems
- ❖ Useable Pass Band 194 MHz
- ❖ Impedance 50 Ω Input and Output
- ❖ Unbalanced to Unbalanced Operation

Electrical Specification


Parameters	Value	Unit
Center Frequency (Fo)	2593.000	MHz
Insertion Loss, typ/max	2496 ~ 2500 MHz	3.0 / 3.5
	2500 ~ 2680 MHz	2.8 / 3.3
	2555 ~ 2655 MHz	2.5 / 3.0
	2545 ~ 2575 MHz	2.4 / 2.8
	2620 ~ 2690 MHz	2.5 / 2.9
VSWR, typ/max	2496 ~ 2520 MHz	1.5 / 2.0
	2520 ~ 2690 MHz	1.5 / 2.0
Amplitude Ripple (p-p), typ/max	2496 ~ 2520 MHz	1.0 / 2.5
	2520 ~ 2690 MHz	0.5 / 1.8
Attenuation, min/typ	10 ~ 916 MHz	-40 / -45
	925 ~ 960 MHz	-39 / -44
	1226.57 ~ 1228.63 MHz	-32 / -37
	1242.42 ~ 1249.14 MHz	-31 / -37
	1248 ~ 1564 MHz	-28 / -32
	1565 ~ 1605 MHz	-27 / -31
	1615 ~ 2400 MHz	-16 / -23
	1710 ~ 1785 MHz	-26 / -30
	1805 ~ 1920 MHz	-23 / -30
	1920 ~ 1980 MHz	-22 / -29
	2110 ~ 2170 MHz	-25 / -32
	2401 ~ 2468 MHz	-25 / -30
	2451 ~ 2473 MHz	-20 / -25
4992 ~ 5380 MHz	-25 / -35	
Input Power, max, 5000h	32	dBm
DC Voltage	3	V
ESD Voltage ESD (MM)	50	VDC
Sensitive Discharge Voltage ESD(HBM)	175	VDC
Operating temperature range	-20 ~ +85	°C
Storage Temperature	-40 ~ +85	°C


Dimension

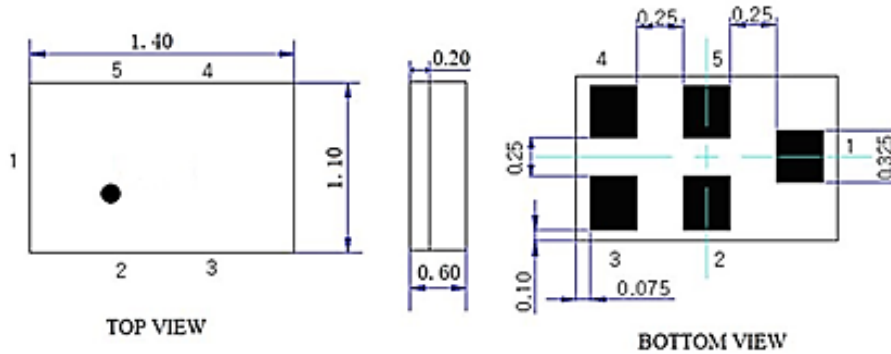


PIN #	PIN NAME	DESCRIPTION
1	IN	Input
2	GND	Ground
3	GND	Ground
4	OUT	Output
5	GND	Ground

Frequency Characteristics

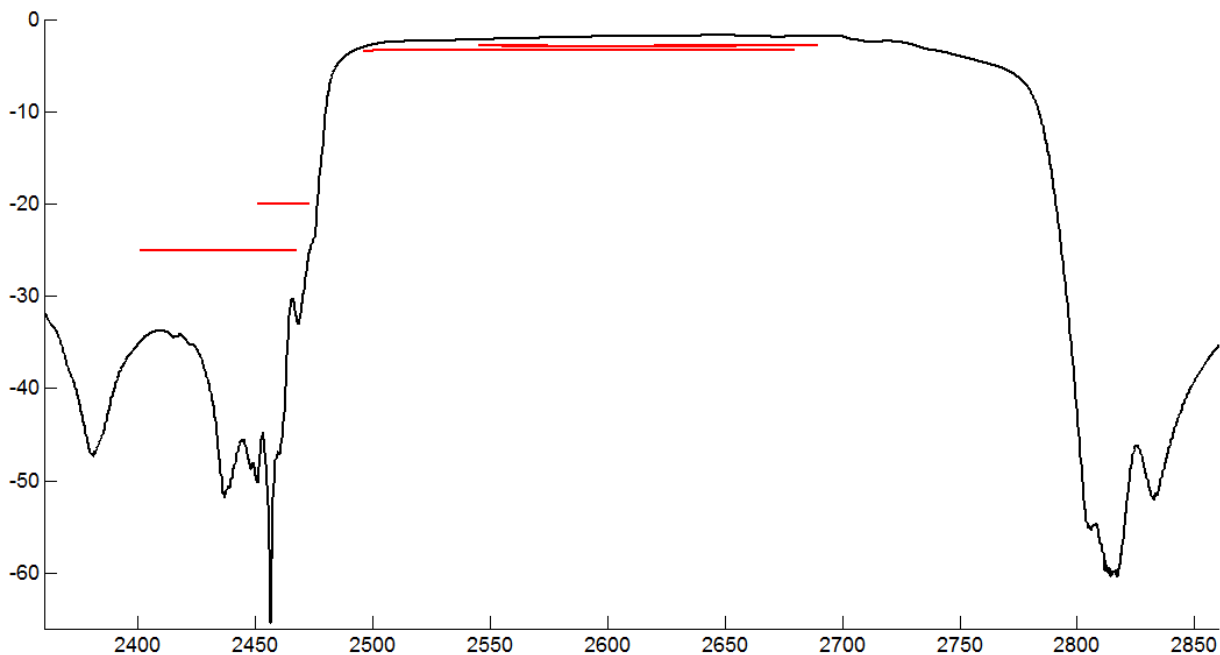

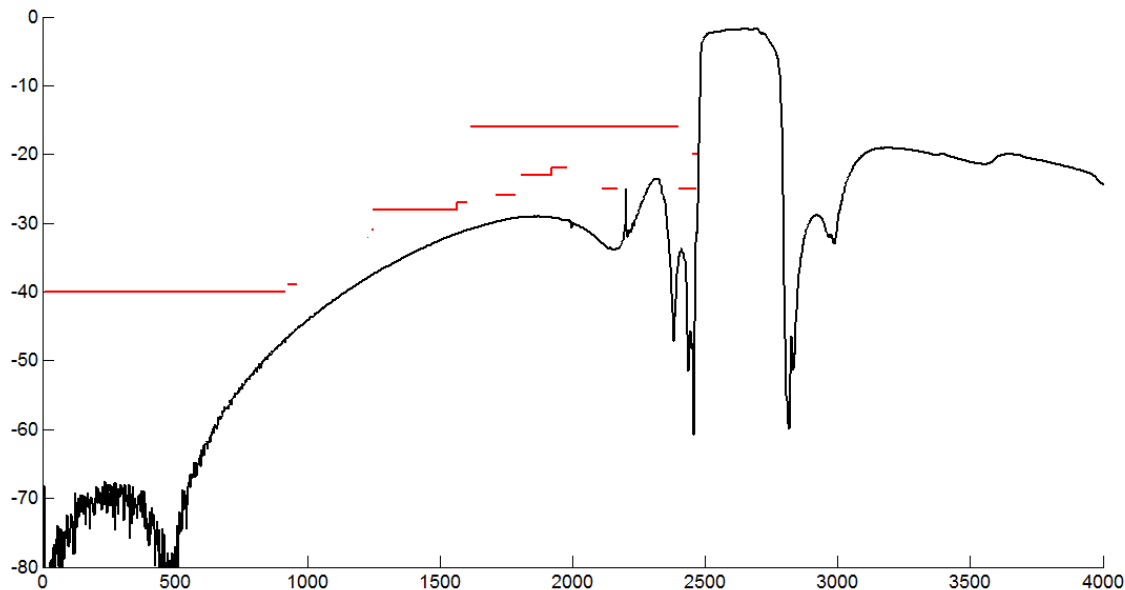

Test Circuit

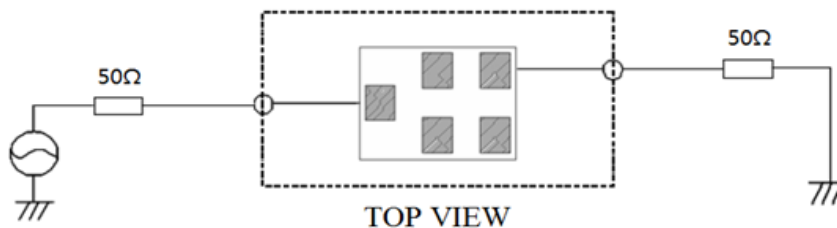

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	2
REACH – SVHC	Compliant
RoHS	Compliant
PACKAGING	TAPE & REEL



APPROVAL

DRAWN BY	LP, December 19, 2018
APPROVED BY	JL, December 19, 2018
REVISION	A, Initial Release

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.