

# SZS 0,4X2,5 VDE - Screwdriver



1205037

<https://www.phoenixcontact.com/us/products/1205037>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Screwdriver, slot-headed, VDE insulated, size: 0.4 x 2.5 x 80 mm, 2-component grip, with non-slip grip

## Your advantages

- For working on or in the vicinity of live parts up to 1000 V AC or 1500 V DC
- The tools feature ergonomic two-component safety handles
- Large contact surface of blades inside screw head
- Individually tested safety screwdrivers according to DIN EN 60900 (VDE 0682-201)

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1205037             |
| Packing unit                         | 10 pc               |
| Minimum order quantity               | 10 pc               |
| Sales key                            | BH31                |
| Product key                          | BH3144              |
| Catalog page                         | Page 442 (C-3-2019) |
| GTIN                                 | 4017918019075       |
| Weight per piece (including packing) | 30.19 g             |
| Weight per piece (excluding packing) | 30 g                |
| Customs tariff number                | 82054000            |
| Country of origin                    | CZ                  |

# SZS 0,4X2,5 VDE - Screwdriver

1205037

<https://www.phoenixcontact.com/us/products/1205037>



## Technical data

### Notes

#### Environmental Product Compliance

California Proposition 65

Further information on California's prop. 65 is available under "Downloads" in the manufacturer's declaration

### Product properties

Product type

Screwdriver tools

Type

Bladed


### Connection data

Output

Bladed

### Dimensions

Dimensional drawing



Width

26 mm

Blade width

2.5 mm

Blade height

80 mm

Length

161 mm

Wrench size

0 mm

Wrench size for mounting

0 mm

Blade thickness

0.4 mm

### Material specifications

Material

alloyed tool steel

### Standards and regulations

Tests

DIN/ISO 2380-1 IEC 60900:2004

# SZS 0,4X2,5 VDE - Screwdriver


1205037

<https://www.phoenixcontact.com/us/products/1205037>



## Drawings

Dimensional drawing

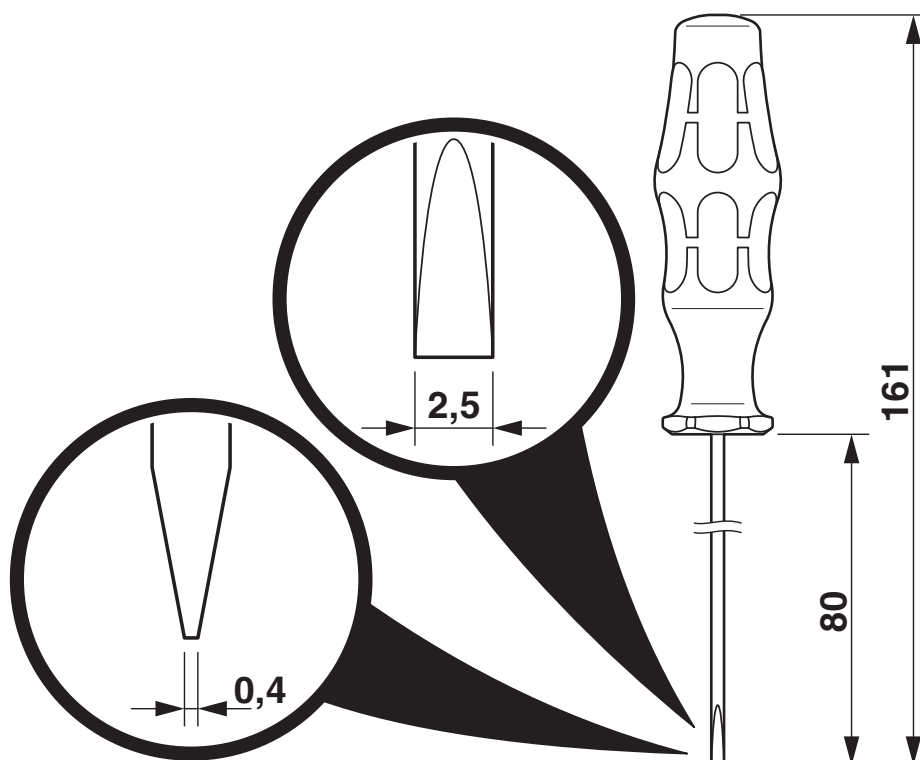

# SZS 0,4X2,5 VDE - Screwdriver



1205037

<https://www.phoenixcontact.com/us/products/1205037>

## Approvals

📄 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1205037>



**EAC**

Approval ID: RU x-DE.xx08.B.02974



**VDE Zeichengenehmigung**

Approval ID: 086858

# SZS 0,4X2,5 VDE - Screwdriver



1205037

<https://www.phoenixcontact.com/us/products/1205037>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 21040407 |
| ECLASS-12.0 | 21040407 |
| ECLASS-13.0 | 21040407 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000158 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 27111700 |
|-------------|----------|

# SZS 0,4X2,5 VDE - Screwdriver



1205037

<https://www.phoenixcontact.com/us/products/1205037>

## Environmental product compliance

|                                         |                                                                                     |
|-----------------------------------------|-------------------------------------------------------------------------------------|
| EU RoHS                                 |                                                                                     |
| Fulfills EU RoHS substance requirements | Not applicable, No electrical and electronic equipment (EEE), cannot be used in EEE |
| EU REACH SVHC                           |                                                                                     |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%                                                          |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)