

Analogue Signal Processing

The problem

The real world can be measured in many ways, for example, via temperature, humidity, air pressure and so forth. The parameters of these different physical qualities change continuously. Elements that monitor statuses and changes in statuses of a given environment, must reflect these continual changes. Within the framework of industrial monitoring tasks, the statuses of an environment are monitored by using sensors. These sensors should provide signals that enable connected evaluating and monitoring installations to draw detailed conclusions concerning the status of, for example, a production process. The sensor signals trace the continuous changes in the monitored range. The signals can be in analogue or digital form; which means in normal cases, an electrical voltage or current value is produced that corresponds proportionally to the monitored physical quantities. Increasing automation with the intention of achieving or maintaining certain predetermined statuses makes the processing of analogue values increasingly important. This is also true of fields beyond those where this has been necessary and standard for a long time, for example, processing technology in the chemical industry. Standard electrical signal values are the norm within the framework of this processing technology.

Current values from 0...20 mA, 4...20 mA or voltage values from 0...10 V have been introduced as sensor output values for differing physical quantities. Weidmüller has taken account the need for increasing automation with the processing of these analogue signals, and offers a wide range of products that are designed for handling sensor signals.

This means, units are made available for standard signals (0...20 mA, 4...20 mA, 0...10 V) that generate output signal values proportional to the variable input signals, and at the same time enable the safe separation of, for example, sensor circuits of an evaluation circuit. This safe separation is

particularly important to avoid mutual interference of multiple sensor circuits, for example, ground loops in interlinked measurement circuits. The wide range of products includes all functions for converting separation and monitoring signals. The different designs in connection with the respective functions cover practically all applications in industrial measurement technology. With these new products, Weidmüller offers the possibility of taking into account the demands of modern automation technology with the inclusion of analogue signals. These products guarantee an elementary function between signals from the field and the further processing systems. The mechanical characteristics of these products correspond to those of the well-known Weidmüller products and are part of a continuous, ongoing concept. The signal conditioners can be combined together with other Weidmüller products.

They have been electrically and mechanically designed to ensure that only a minimum of wiring and maintenance costs are necessary.

The product program


contains the following functions:

- Current transformer
- Voltage transformer
- Thermocouple conditioners for resistance thermometers
- Frequency signal conditioner
- Potentiometer conditioner
- AC signal conditioner
- Bridge measurement conditioner
- Limit value monitoring modules
- AD/DA converter

These products are categorised according to functionality as pure signal conversion, 2-way-isolation, 3-way-isolation and as passive separation.



Analogue Signal Processing




2-way-isolation separates the signals galvanically and decouples the measurement circuits. In so doing it eliminates potential differences caused by long cable lengths and common reference points. Furthermore, the galvanic isolation offers protection against destruction by overvoltage, and against inductive and capacitive interferences.




3-way-isolation also decouples the supply voltage from the input and output circuits, and enables the function with only one operating voltage.




The **passive isolator** offers a further elementary advantage; it needs no additional voltage supply. The supply to the modules ensues via the input circuit and is transferred to the output. This current loop supply is distinguished by very low power consumption.




There are a large number of products available for measuring temperatures. RTD **PT100** signals, in 2-, 3- and 4-wire technology, are converted to standardised 0 – 20 mA, 4 – 20 mA and 0 – 10 V signals.




The modules which can be connected to commercially available **thermocouples** have cold junction compensation as standard. Furthermore, the modules amplify and linearize the voltage signals from the thermocouple. This guarantees an exact conditioning of analogue signals by eliminating sources of interference and errors.




Frequency converters convert frequencies to standard analogue signals. This enables controllers connected in series to directly process impulse trains when making speed or rotational speed measurements.



It is inconceivable to think about automation without **analogue-digital-analogue converters**. To bring together the aforementioned analogue form of describing the environment and the customary digital processing, within the framework of process monitoring, it is necessary to convert analogue signals into digital signals. Weidmüller offers modules for the following standard input and output signals: 0...20 mA, 4...20 mA and 0...10 V. 8-bit and 12-bit digital modules are available. All modules have an added input for making instantaneous measurements.



Current monitoring modules enable the monitoring of current values up to 60 A in alternating or direct voltages. Over range or under range values trip the switching output. Modules with analogue outputs enable the continuous monitoring of currents via connected controls.




Voltage monitoring modules can be used to monitor direct and alternating voltages. Voltage fluctuations, resulting from switching operations or network overloads, can be reliably recognised and reported via the adjustable threshold function.



Modules for **monitoring of revolutions and torque** enable the control of cyclic movements on conveyor belts, ventilators and pumps. The output responds after a set amount of time, should the expected impulse not be received. The reliable potential-free relay contact, signalises the interference to the responsible component group.


Design Overview

Mini Coupler / Mini Conditioner

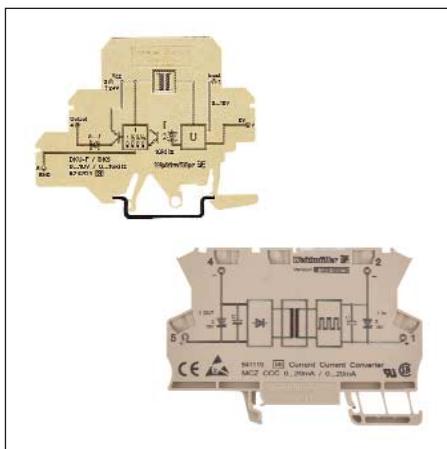


DK Mini Coupler / MCZ Mini Conditioner

- Extensive range of electronic functions in terminal format
- Pluggable cross-connections with mini conditioners
- Mini couplers with screw-in cross-connection combs
- Mini couplers with screw connections
- Mini conditioners with tension clamp connections

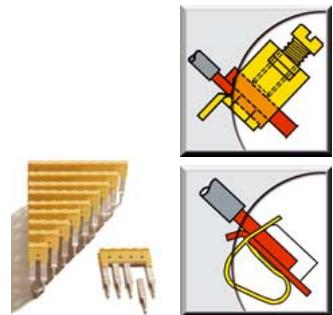


WAVESERIES

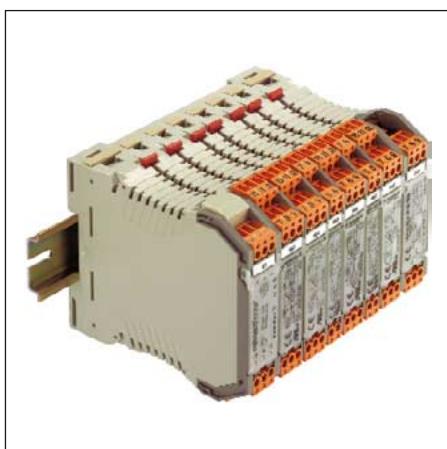


WAVEANALOG / WAVEANALOG PRO / WAVECONTROL

- Pluggable PCB for fast service when the configuration is changed
- Pluggable cross-connection in base socket housing to distribute the power supply, marking (CC) in the block diagram on the head plate
- Pluggable connections with optional screw or tension clamp connection

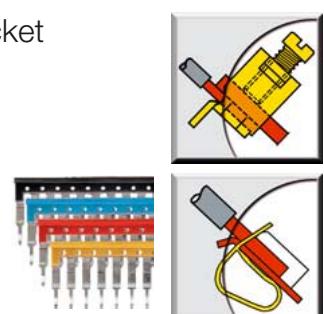

RS profiles

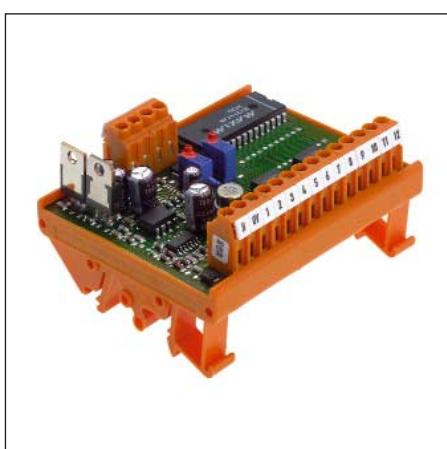

Analog-/Digital-Converters

- Mounts onto TS 32 and TS 35 mounting rails
- Open, cost-saving design
- Variable housing width

Selection Table of Functions

Function	Areas of application	Description	Versions	Page
DC signal conditioners	Signal conditioning, signal isolation, suppression of mass loops	DC input/fixed functions and configurable inputs and outputs	MCZ WAVEANALOG WAVEANALOG PRO	164 174-184 185
	Motor current limitation, pressure alarm, direct disconnection of connected modules, safety function	DC input/limit value monitoring	DK MCZ	172 173
PT100 signal conditioners	Temperature monitoring, noise rejection, electrical decoupling of visualization devices, suppression of mass loops, heating and cooling monitoring, overheating protection of motors	RTD input/fixed functions and configurable inputs and outputs	MCZ WAVEANALOG WAVEANALOG PRO	165 186-188 189
Thermocouple conditioners	Temperature monitoring, noise rejection, electrical decoupling of visualization devices, suppression of mass loops, heating and cooling monitoring, overheating protection of motors	Thermo input/fixed functions and configurable inputs and outputs	WAVEANALOG WAVEANALOG PRO	190 191
Frequency signal conditioners	Flow rate measurements, frequency converter monitoring, speed measurements, pulse processing	Input/fixed functions and configurable inputs and outputs	DK MCZ	167-168 166
AD/DA converters	Conditioning of voltage and current signals in 8-bit/12-bit digital form	8-bit AD/DA converter 12-bit AD/DA converter	RS	210-213
Current monitoring	Motor current monitoring, emergency lighting monitoring	AC input/measuring of sinusoidal and non sinusoidal signals up to 60A	DKI WAVECONTROL SMSI	172 196-199 200-203
Voltage monitoring	Under and overvoltage monitoring, operating status indication	One and three-phase overvoltage	SMSU	204-205
Motion and rotational speed monitoring	Downtime monitoring, conveyor-drive monitoring, monitoring of fans, pumps or pistons	PNP/NPN or NAMUR input/switching output	DKLW SMS	169 206
Namur switching amplifier	Switching amplifier	Namur input/switching output	EGV	207
Setpoint device	Testing measuring distances, defined input of analogue values	1 control input/+/ -set value/ analogue output	EMA/SW24	208

Selection Table

Function	Input	Output	Galvanic isolation	Voltage supply	Setting	Module width/mm	Connection type	Cat. No.	Page
DC/DC	0...20mA	0...20mA	yes	Without auxiliary pwr. current loop supply from input	Fixed	6	Tens. clamp	8411190000	164
	0...20mA	0...20mA	yes	Without auxiliary pwr. current loop supply from input	Fixed	17.5	Screw/tens. clamp	8444950000/ 8444960000 (1-channel)	174
	0...20mA	0...20mA	yes	Without auxiliary pwr. current loop supply from input	Fixed	17.5	Screw/tens. clamp	8463580000/ 8463590000 (2-channel)	174
	0...20mA	0...20mA	2-way	19.2...28.8Vdc/ Voltage supply of both sides	Fixed	12.5	Screw/tens. clamp	8445070000/ 8445080000	176
	0...20mA	0...20mA	yes	18...30Vdc	Fixed/10 Hz	17.5	Screw/tens. clamp	8540180000/ 8540190000	178
	0...20mA	0...20mA	3-way	18...30Vdc	Fixed/20 kHz	17.5	Screw/tens. clamp	8447160000/ 8447170000	181
	0...20mA	4...20mA	2-way	19.2...28.8Vdc/ Voltage supply of both sides	Fixed	12.5	Screw/tens. clamp	8446970000/ 8446990000	176
	0...20mA	4...20mA	yes	18...30Vdc	Fixed/10 Hz	17.5	Screw/tens. clamp	8540250000/ 8540260000	181
	0...20mA	4...20mA	3-way	18...30Vdc	Fixed/20 kHz	17.5	Screw/tens. clamp	8447190000/ 8447200000	181
	0...20mA	0...10V	2-way	19.2...28.8Vdc/ Voltage supply of both sides	Fixed	12.5	Screw/tens. clamp	8447020000/ 8447030000	176
	0...20mA	0...10V	yes	18...30Vdc	Fixed/10 Hz	17.5	Screw/tens. clamp	8540270000/ 8540280000	178
	0...20mA	0...10V	3-way	18...30Vdc	Fixed/20 kHz	17.5	Screw/tens. clamp	8447220000/ 8447230000	181
	4...20mA	0...20mA	2-way	19.2...28.8Vdc/ Voltage supply of output side	Fixed	12.5	Screw/tens. clamp	8444980000/ 8444990000	175
	4...20mA	0...20mA	yes	18...30Vdc	Fixed/10 kHz	17.5	Screw/tens. clamp	8540200000/ 8540210000	179
	4...20mA	0...20mA	3-way	18...30Vdc	Fixed/20 kHz	17.5	Screw/tens. clamp	8447250000/ 8447260000	182
	4...20mA	4...20mA	2-way	19.2...28.8Vdc/ Voltage supply of output side	Fixed	12.5	Screw/tens. clamp	8445010000/ 8445020000	175
	4...20mA	4...20mA	yes	18...30Vdc	Fixed/10 Hz	17.5	Screw/tens. clamp	8540180000/ 8540190000	178
	4...20mA	4...20mA	3-way	18...30Vdc	Fixed/20 kHz	17.5	Screw/tens. clamp	8447160000/ 8447170000	182
	4...20mA	0...10V	2-way	19.2...28.8Vdc/ Voltage supply of output side	Fixed	12.5	Screw/tens. clamp	8445040000/ 8445050000	175
	4...20mA	0...10V	yes	18...30Vdc	Fixed/10 Hz	17.5	Screw/tens. clamp	8540230000/ 8540240000	179
	4...20mA	0...10V	3-way	18...30Vdc	Fixed/20 kHz	17.5	Screw/tens. clamp	8447280000/ 8447290000	182
	0...10V	0...20mA	2-way	19.2...28.8Vdc/ Voltage supply of both sides	Fixed	12.5	Screw/tens. clamp	8447050000/ 8447080000	177
	0...10V	0...20mA	yes	18...30Vdc	Fixed/10 Hz	17.5	Screw/tens. clamp	8540310000/ 8540320000	180
	0...10V	0...20mA	3-way	18...30Vdc	Fixed/20 kHz	17.5	Screw/tens. clamp	8447310000/ 8447320000	183
	0...10V	4...20mA	2-way	19.2...28.8V/ Voltage supply of both sides	Fixed	12.5	Screw/tens. clamp	8447100000/ 8447110000	177
	0...10V	4...20mA	yes	18...30Vdc	Fixed/10 Hz	17.5	Screw/tens. clamp	8540290000/ 8540300000	180
	0...10V	4...20mA	3-way	18...30Vdc	Fixed/20 kHz	17.5	Screw/tens. clamp	8447340000/ 8447350000	183
	0...10V	0...10V	2-way	19.2...28.8Vdc/ Voltage supply of both sides	Fixed	12.5	Screw/tens. clamp	8447130000/ 8447140000	177

Selection Table

Function	Input	Output	Galvanic isolation	Voltage supply	Setting	Module width/mm	Connection type	Cat. No.	Page
RTD/DC	0...10V	0...10V	yes	18...30Vdc	Fixed/10 Hz	17.5	Screw/tens. clamp	8540330000/ 8540340000	180
	0...10V	0...10V	3-way	18...30Vdc	Fixed/20 kHz	17.5	Screw/tens. clamp	8447370000/ 8447380000	184
	Variable voltage and current (+/-20mV...+/-200V, +/-0.1mA...+/-100mA)	Variable voltage and current (-10V...+10V, -20mA...+20mA)	yes	20...253Vdc	DIP switch Potentiometer	12.5	Screw/tens. clamp	8560740000/ 8560750000	185
	PT100/	(4)...20mA	no	19.2...28.8Vdc	DIP switch	12.5	Screw/tens. clamp	8432210000/ 8432220000	186
RTD/DC	PT100/ 2-wire	0...10V	no	19.2...28.8Vdc	DIP switch Potentiometer	12.5	Screw/tens. clamp	8432180000/ 8432190000	186
	PT100/ 2-wire	4...20mA	no	current loop supply in output	Fixed	6	Tens. clamp	8425720000	165
	PT100/ 3-wire	0(4)...20mA	no	19.2...28.8Vdc	DIP switch Potentiometer	12.5	Screw/tens. clamp	8432150000/ 8432160000	187
	PT100/ 3-wire	0...10V	no	19.2...28.8Vdc	DIP switch Potentiometer	12.5	Screw/tens. clamp	8432090000/ 8432130000	187
	PT100/0 4-wire	(4)...20mA	no	19.2...28.8Vdc	DIP switch Potentiometer	12.5	Screw/tens. clamp	8432270000/ 8432280000	188
	PT100/ 4-wire	0...10V	no	19.2...28.8Vdc	DIP switch Potentiometer	12.5	Screw/tens. clamp	8432240000/ 8432250000	188
Thermo/DC	PT100/ 2-/3-/4-conduct. Ni100 Potentiometer: min. 0...100Ω max. 0...100kΩ R: 0...450Ω	0...10V 0...20mA 4...20mA	yes	18...30Vdc	DIP switch Potentiometer	17.5	Screw/tens. clamp	8560700000/ 8560710000	189
	K, J, T, E, N, R, S, B								
	Thermo K, J, T, E, N, R, S, B	0...10V 0...20mA 4...20mA	no	19.2...28.8Vdc	DIP switch	12.5	Screw/tens. clamp	8432300000/ 8432310000	190
Frequency/DC	Thermocouples K, J, T, E, N, R, S, B	0...10V 0...20mA 4...20mA	yes	18...30Vdc	DIP switch Potentiometer	17.5	Screw/tens. clamp	8560720000/ 8560730000	191
	0...50/100/500Hz 0...1/5/10/16kHz	0(4)...20mA	no	21.6...26.4Vdc	DIP switch	6	Screw	8311870001	168
	0...50/100/500Hz 0...1/5/10/16kHz	0(4)...20mA	no	21.6...26.4Vdc	DIP switch	6	Screw	8311870001	168
Limit value monitoring	0...50/100/500Hz 0...1/5/10/16kHz	0...10V	no	21.6...26.4Vdc	DIP switch	6	Screw	8283810000	168
	0...20mA	0...1/5/10/16kHz	no	21.6...26.4Vdc	DIP switch	6	Screw	8258870000	167
	0...20mA	0...1/5/10/16kHz	no	21.6...26.4Vdc	DIP switch	6	Tens. clamp	8461480000	166
	4...20mA	0...1/5/10/16kHz	no	current loop supply in input	DIP switch	6	Screw	8081330000	167
	4...20mA	0...1/5/10/16kHz	no	current loop supply in input	DIP switch	6	Tens. clamp	8461490000	166
	0...10V	0...1/5/10/16kHz	no	21.6...26.4Vdc	DIP switch	6	Screw	8242040000	167
	0...10V	0...1/5/10/16kHz	no	21.6...26.4Vdc	DIP switch	6	Tens. clamp	8461470000	166
	Variable, programmable	Switching output PNP	no	19.2...28.8Vdc	Fixed	12	Screw	8248340000	170- 171
AD convert.	0...20mA	Switching output PNP 2-channel	no	19.2...28.8Vdc	Potentiometer	6	Screw	8031320000	172
	0...20mA	Switching output PNP 2-channel	no	19.2...28.8Vdc	Potentiometer	6	Tens. clamp	8227350000	173
	0...10V	Switching output PNP 2-channel	no	19.2...28.8Vdc	DIP switch Potentiometer	6	Screw	8019640000	172
	0...10V	Switching output PNP 2-channel	no	19.2...28.8Vdc	DIP switch Potentiometer	6	Tens. clamp	8260280000	173
AD convert.	0...20mA	8-bit	no	19.2...28.8Vdc	Fixed	70	Screw	1160561001	210
	4...20mA	8-bit	no	19.2...28.8Vdc	Fixed	70	Screw	1168561001	210
	0...10V	8-bit	no	19.2...28.8Vdc	Fixed	70	Screw	1160361001	210
		8-bit	no	19.2...28.8Vdc	Fixed	70	Screw	1122361001	210
	0...20mA	12-bit	no	19.2...28.8Vdc	Fixed	70	Screw	1168461001	212
	4...20mA	12-bit	no	19.2...28.8Vdc	Fixed	70	Screw	1169161001	212
	0...10V	12-bit	no	19.2...28.8Vdc	Fixed	70	Screw	1168361001	212
		12-bit	no	19.2...28.8Vdc	Fixed	70	Screw	1168261001	212

Selection Table

Function	Input	Output	Galvanic isolation	Voltage supply	Setting	Module width/mm	Connection type	Cat. No.	Page
DA convert.	8-bit	0...20mA	no	19.2...28.8Vdc	Fixed	70	Screw	1165860000	211
	8-bit	4...20mA	no	19.2...28.8Vdc	Fixed	70	Screw	1169260000	211
	8-bit	0...10V	no	19.2...28.8Vdc	Fixed	70	Screw	1160760000	211
	8-bit		no	19.2...28.8Vdc	Fixed	70	Screw	1123360000	211
	12-bit	0...20mA	no	19.2...28.8Vdc	Fixed	70	Screw	1166060000	213
	12-bit	4...20mA	no	19.2...28.8Vdc	Fixed	70	Screw	1165960000	213
	12-bit	0...10V	no	19.2...28.8Vdc	Fixed	70	Screw	1166160000	213
	12-bit		no	19.2...28.8Vdc	Fixed	70	Screw	1160860000	213
Current monitoring	0...1/5/10 Aac	1)	2-way	21.6...26.4Vdc	DIP sw./P*	22.5	Screw	8516560000	196
	0...1/5/10 Aac	1)	2-way	21.6...26.4Vdc	DIP sw./P*	22.5	Tens. clamp	8516570000	196
	0...20/40/60 Aac	1)	2-way	21.6...26.4Vdc	DIP sw./P*	22.5	Screw	8513340000	196
	0...20/40/60 Aac	1)	2-way	21.6...26.4Vdc	DIP sw./P*	22.5	Tens. clamp	8526600000	196
	0...1/5/10 Aac	2)	2-way	21.6...26.4Vdc	DIP switch	22.5	Screw	8523400000	197
	0...1/5/10 Aac	2)	2-way	21.6...26.4Vdc	DIP sw./P*	22.5	Tens. clamp	8523410000	197
	0...1/5/10 Aac	3)	2-way	12...30Vdc	DIP sw./P*	22.5	Screw	8526650000	197
	0...1/5/10 Aac	3)	2-way	12...30Vdc	DIP sw./P*	22.5	Tens. clamp	8526660000	197
	0...5/10 Aac	4)	2-way	21.6...26.4Vdc	DIP sw./P*	22.5	Screw	8526610000	198
	0...5/10 Aac	4)	2-way	21.6...26.4Vdc	DIP sw./P*	22.5	Tens. clamp	8526620000	198
	0...20/25/30 Aac	4)	2-way	21.6...26.4Vdc	DIP sw./P*	22.5	Screw	8545830000	198
	0...20/25/30 Aac	4)	2-way	21.6...26.4Vdc	DIP sw./P*	22.5	Tens. clamp	8545840000	198
	0...20/40/60 Aac	4)	2-way	21.6...26.4Vdc	DIP sw./P*	22.5	Screw	8513330000	199
	0...20/40/60 Aac	4)	2-way	21.6...26.4Vdc	DIP sw./P*	22.5	Tens. clamp	8526590000	199
	0.1...2A	Switching output PNP	no	18...30Vdc	Fixed	6	Screw		
	1...50mAdc	Opto-coupler	yes	10...250Vdc	Op. point	22.5	Screw	1157160000	200
	40...250mAdc	Opto-coupler	yes	10...250Vdc	Op. point	22.5	Screw	1156360000	200
	40...250mAdc	Opto-coupler	yes	10...250Vdc	Op. point	22.5	Screw	1156460000	201
	0.2...2.2Aac	Opto-coupler	yes	10...250Vdc	Op. point	22.5	Screw	1157360000	201
	1...5Aac	21.6...26.4Vuc	yes	10...250Vdc	Fixed	22.5	Screw	1112160000	201
	1...5Aac	5...48Vdc	yes	10...250Vdc	Fixed	22.5	Screw	8026930000	201
	1...5Aac	LED	yes	10...250Vdc	Fixed	22.5	Screw	1112060000	201
	40...250mAdc	NO 1-channel	yes	10...250Vdc	Op. point	22.5	Screw	1156660000	202
	40...250mAdc	NO 1-channel	yes	10...250Vdc	Op. point	22.5	Screw	1159960000	202
	0.2...2.2Aac	NO 1-channel	yes	10...250Vdc	Op. point	22.5	Screw	1156960000	203
	1...5Aac	NO 1-channel	yes	10...250Vdc	Fixed	22.5	Screw	1112260000	203
Voltage monitoring	1-24Vdc	CO 1-channel	yes	21.6...26.4Vuc	Op. point	22.5	Screw	0555060000	205
	1-230Vuc	CO 1-channel	yes	207...253Vac	Op. point	22.5	Screw	0555160000	205
	18...24Vac	CO 1-channel	yes	18...27Vac	Op. point	22.5	Screw	1156760000	204
	36...48Vac	CO 1-channel	yes	36...53Vac	Op. point	22.5	Screw	1157660000	204
	83...110Vac	CO 1-channel	yes	83...121Vac	Op. point	22.5	Screw	1157760000	205
	165...220Vac	CO 1-channel	yes	165...253Vac	Op. point	22.5	Screw	1157860000	205
	200...260Vac	NO 1-channel	yes	200...299Vac	Op. point	22.5	Screw	1160160000	205
	3 phase 165...230Vac	NO 2-channel	yes	165...230Vac	Op. point	22.5	Screw	1156560000	205
Rotational-motion and r.p.m. monitoring	3 phase 165...230Vac	NO/NC	yes	165...230Vac	Op. point	22.5	Screw	1178760000	205
	P. / N. switching 24Vdc	CO 1-channel	no	195.5...241.5Vac	Potentiometer	22.5	Screw	1110560000	206
	Namur switch amplifier	Namur	NO 1-channel	no	21.6...26.4Vdc	no	22.5	Screw	1120360000
Setpoint device	Namur	PNP/NPN	no	21.6...26.4Vdc	no	22.5	Screw	1122460000	207
	0...24V	10.5...+10.5V	yes	21.6...26.4Vdc	Potentiometer	22.5	Screw	1172660000	208

- 1) Switch output / 1 changeover contact
- 2) 0...10 V, 0 (4)...20 mA switchable
- 3) 4...20 mA / current loop supply
- 4) Switch output / 1 changeover contact
- 5) 0...10 V, 0 (4)...20 mA switchable


DIP switch./P* = DIP switch / Potentiometer

Passive Isolator

MCZ CCC 0...20 mA/0...20 mA





This module is a reasonably priced passive separator for galvanically separating standard 0.4...20 mA signals. It draws its power from the measurement signal and requires no further auxiliary power. The measurement signal is transmitted 1:1. The module is distinguished by its low power consumption as well as a response current <100 µA.

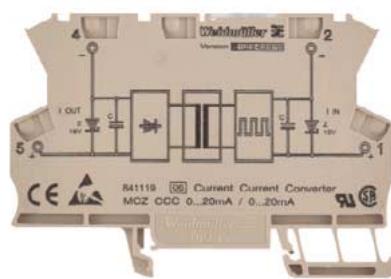

Block diagram

Working resistance diagram

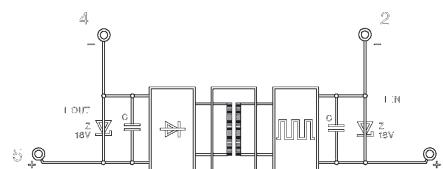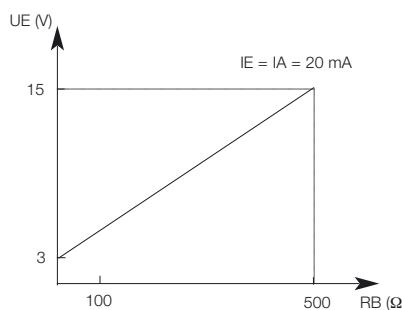

Ordering data

for TS 35

Type

Cat. No.

8411190000

without power supply

Technical data

Input

Response current

Voltage drop

Max. overload capacity at input

0...20 mA (max. 15 V)

< 100 µA

2.5...3 V (at 20 mA)

50 mA, 15 V

Output

Set time (T99)

Residual ripple

0...20 mA (max. 10 V)

approx. 5 ms at 500 Ω working resistance impedance

< 10 mV_{eff}

Chopper frequency

Transmission error

Temperature effect

approx. 200 kHz

< 0.1 % from end value, + 0.05 % from mean/100 Ω working resistance

< 50 ppm/K from measurement value for working resistance 0 Ω

Voltage strength

Input/output

510 V_{eff}

EMC

EMVG

EN 50081-1

EN 50082-2

CE, UL, CSA

Approvals

Ambient temperature

- assembled without spacing

- assembled with 20 mm spacing

-25 °C...+40 °C

-25 °C...+50 °C

Storage temperature

-40 °C ...+85 °C

Conductor

AWG 22...12

Conductor cross-section

1.5 mm²

Overall width

6 mm

Dimensions and accessories see

Page 305

RTD Thermocouple Conditioners


- for 2 and 3 wire sensors




The temperature module converts measurement values from a PT 100 into analogue measurement signals. The module supplies the sensor with power. The module is distinguished by its accuracy and linearity.

MCZ PT100/3 CLP

0...100 °C / 0...120 °C / 0...150 °C / 0...200 °C / 0...300 °C
-50...+150 °C / -40...100 °C

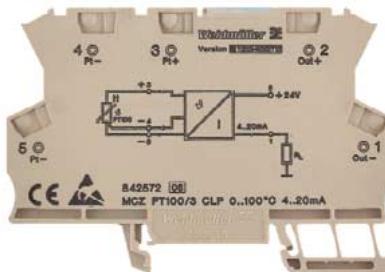

Block diagram

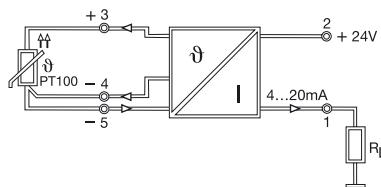

Ordering data

for TS 35

Type	Cat. No.
MCZ PT100/3 CLP 0...100 °C	8425720000
MCZ PT100/3 CLP 0...120 °C	8483680000
MCZ PT100/3 CLP 0...150 °C	8604420000
MCZ PT100/3 CLP 0...200 °C	8473010000
MCZ PT100/3 CLP 0...300 °C	8473020000
MCZ PT100/3 CLP -50...+150 °C	8473000000
MCZ PT100/3 CLP -40...100 °C	8604430000

Technical data

Input

Connection	3-wire / 2-wire*
Max. wire resistance	each 50 Ω
Leadwire resistance effect	max. 0.006 °C/Ω
Supply current	0.8 mA

Output

Load	750 Ω at 24 V
Supply voltage	max: 30V/min: 9V+20mA x R _L
Residual ripple of supply voltage	max: 1.5 V at 100 Hz
Set time	10 ms
Accuracy	Type. 0.2 % max. 0.5 % v. FSR
Linearity	<0.1 % v. FSR
Temperature coefficient	max. ±250 ppm/°C

Open circuit recognition	yes
--------------------------	-----

EMC

EMVG	
EN 50081-1	
EN 50082-2	
CE, UL, CSA	


Ambient temperature	0 °C...+50 °C
Storage temperature	-20 °C...+85 °C
Conductor	AWG 22...12
Conductor cross-section	1.5 mm ²
Overall width	6 mm

* Putting a bridge between Pins 4 and 5

** current loop supplied

Frequency Signal Conditioners

- Tension clamp connection
- LED-Display
- Adjustable frequency output

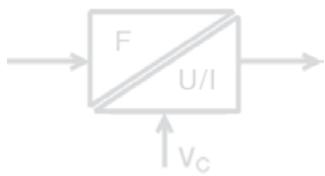

The option of reading-in the analogue signals from the field via counter inputs of the control is made possible by converting the analogue signals in to frequencies. It is recommended that twisted and shielded 2-wire cables are used.

MCZ VFC


0...10 V

MCZ CFC

0...20 mA

MCZ CFC

4...20 mA CLP

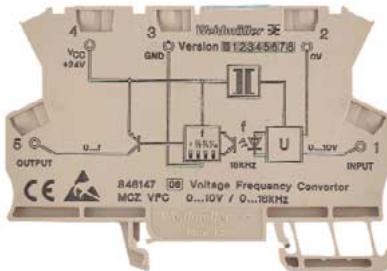


Block diagram/settings

MCZ VFZ 0...10 V and MCZ CFC 0...20 mA

1	2	3	4	DIP switch
1	0	0	0	0...16 kHz
0	1	0	0	0...8 kHz
0	0	1	0	0...4 kHz
0	0	0	1	0...1 kHz

MCZ CFC 4...20 mA CLP

1	2	3	4	DIP switch
1	0	0	0	3.2...16 kHz
0	1	0	0	1.6...8 kHz
0	0	1	0	0.8...4 kHz
0	0	0	1	0.2...1 kHz

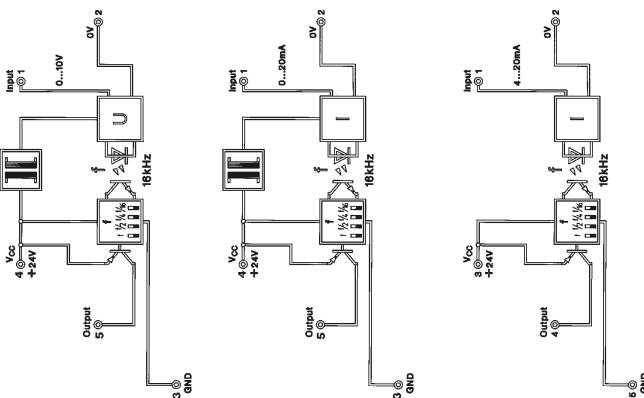

Ordering data

for TS 35	W	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
		MCZ VFC	8461470000	MCZ CFC	8461480000	MCZ CFC	8461490000


Technical data

Input ranges	0...10 V	0...20 mA	4...20 mA LP*
Overload limits, input	30 V	50 mA	50 mA
Input resistance	100 kΩ	50 Ω	50 Ω
Voltage drop, input		1 V at 20 mA	5.8...6.4 at 20 mA
Output			
Output frequency, end value	1 kHz, 4 kHz, 8 kHz, 16 kHz	1 kHz, 4 kHz, 8 kHz, 16 kHz	1 kHz, 4 kHz, 8 kHz, 16 kHz
Frequency adjustment	DIL switch	DIL switch	DIL switch
Readjustment range	±10 %, internal	±10 %, internal	±10 %, internal
Output level	PNP, Ub- 0.7 V	PNP, Ub- 0.7 V	PNP, Ub- 0.7 V
Output current	max. 20 mA	max. 20 mA	max. 20 mA
Display	LED, pulsing	LED, pulsing	LED, pulsing
Supply voltage	24 Vdc ±10 %	24 Vdc ±10 %	24 Vdc ±20 %
Power consumption	14 mA, w/o load	14 mA w/o load	14 mA w/o load
Making current limit	200 mA	200 mA	
Polarisation protection	yes	yes	yes
Accuracy	0.2 % v. FSR	0.2 % v. FSR	0.15 % v. FSR
Temperature coefficient	< 250 ppm/°C	< 250 ppm/°C	< 250 ppm/°C
Coordination of insulation according to EN 50178			
Voltage strength input/output	1 kVdc	1 kVdc	
Rated voltage	100 V	100 V	150 V
Rated surge voltage	1.5 kV	1.5 kV	2.5 kV
Oversupply category	III	III	III
Voltage strength I/O to mounting rail	4 kV _{eff} / 1 min	4 kV _{eff} / 1 min	4 kV _{eff} / 1 min
Operating temperature	0 °C...+50 °C	0 °C...+50 °C	0 °C...+50 °C
Storage temperature	-25 °C...+85 °C	-25 °C...+85 °C	-25 °C...+85 °C
Overall width	6 mm	6 mm	6 mm
Conductor cross-section	1.5 mm ²	1.5 mm ²	1.5 mm ²
Dimensions and accessories see	Page 305	Page 305	Page 305

* without DC/DC converter
input supply via current loop


Frequency Signal Conditioners

- Screw connection
- LED-Display
- Adjustable frequency output

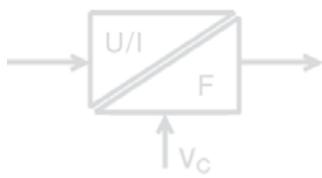

For EMC reasons, frequency processing modules must be used in conjunction with shielded cables. This measure prevents interference of analogue and frequency signals by other signal cables and vice versa.

DKA U/f

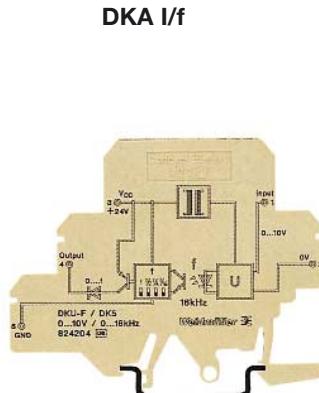


DKA I/f*

Block diagram/settings

DKA U/f and DKA I/f

1	2	3	4	DIP switch
1	0	0	0	0...16 kHz
0	1	0	0	0...8 kHz
0	0	1	0	0...4 kHz
0	0	0	1	0...1 kHz

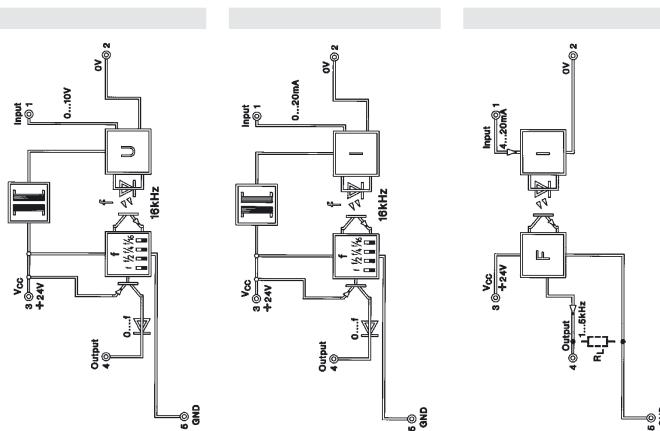


Ordering data

for TS 32	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
Y						
for TS 35						
W						
with combi foot TS 32/TS 35	DKA U/f	8242040000	DKA I/f	8258870000	DKA I/f *	8081330000
Technical data						
Input ranges	0...10 V		0...20 mA		4...20 mA	
Overload limits, input	100 V		50 mA		50 mA	
Input resistance	100 kΩ		50 Ω		max. 320 Ω at 20 mA	
Voltage drop, input			1 V at 20 mA		max. 6.4 V at 20 mA	
Output						
Output frequency, end value	1 kHz, 4 kHz, 8 kHz, 16 kHz		1 kHz, 4 kHz, 8 kHz, 16 kHz		5 kHz (1...5 kHz)	
Frequency adjustment	DIL switch		DIL switch			
Readjustment range	±10 %, internal		±10 %, internal			
Output level	PNP, Ub- 0.7 V		PNP, Ub- 0.8 V		Ub- 3 V	
Output current	max. 20 mA		max. 20 mA		max. 20 mA	
Display	LED, pulsing		LED, pulsing			
Decoupling diode	present		present		present	
Supply voltage	24 Vdc ±10 %		24 Vdc ±10 %		19.2...28.8 Vdc	
Power consumption	14 mA, w/o load		14 mA w/o load		<13 mA w/o load	
Making current limit	200 mA		200 mA			
Polarisation protection	yes		yes		yes	
Accuracy	0.2 % v. FSR <250 ppm/°C		0.2 % v. FSR <250 ppm/°C		0.15 % v. FSR <250 ppm/°C 2	
Coordination of insulation to DIN VDE 0160, Draft 11/94						
Voltage strength input/output	1 kVdc		1 kVdc		4 kVeff	
Rated voltage					150 V	
Rated surge voltage					2.5 kV	
Oversupply category					III	
Voltage strength to mounting rail	4 kVeff		4 kVeff		4 kVeff	
Operating temperature	0 °C...+50 °C		0 °C...+50 °C		0 °C...+50 °C	
Storage temperature	-25 °C...+60 °C		-25 °C...+60 °C		-25 °C...+60 °C	
Overall width	6 mm		6 mm		6 mm	
Conductor cross-section	0.5...4 mm²		0.5...4 mm²		0.5...4 mm²	
Accessories	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
End plate	AP DK5	8268870000	AP DK5	8268870000	AP DK5	8268870000
Dimensions and accessories see	Page 305		Page 305		Page 305	

* without DC/DC converter
Input current loop supplied


Frequency Signal Conditioners

- Screw connection
- LED-Display
- Adjustable frequency output
- multiplex capable

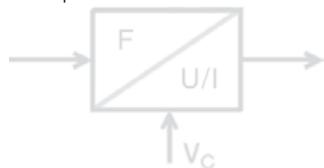


For EMC reasons, frequency processing modules must be used in conjunction with shielded cables. This measure prevents interference of analogue and frequency signals by other signal cables and vice versa.

DKA f/U

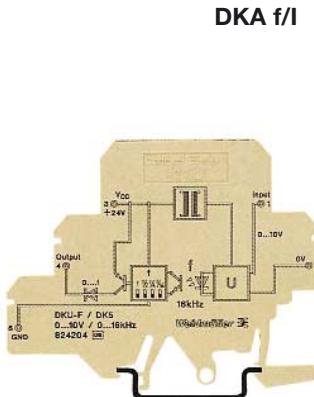

DKA f/I

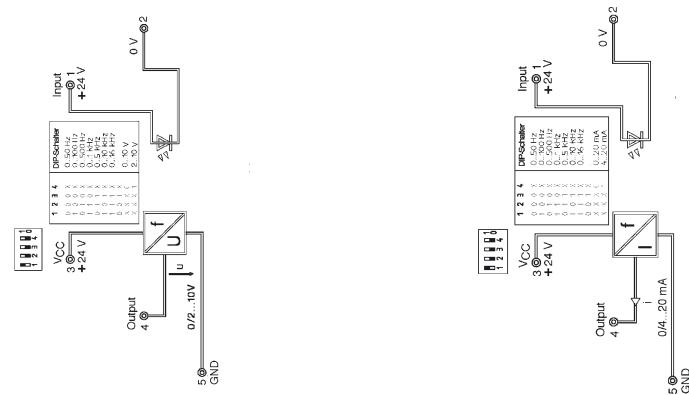

Block diagram/settings

1	2	3	4	DIP switch
0	0	0	X	0...50 Hz
1	0	0	X	0...100 Hz
0	1	0	X	0...500 Hz
1	1	0	X	0...1 kHz
0	1	1	X	0...5 kHz
1	0	1	X	0...10 kHz
1	1	1	X	0...16 kHz
0	0	1	X	Customer specific
X	X	X	0	0...20 mA / 0...10 V
X	X	X	1	4...20 mA / 2...10 V

Ordering data

for TS 32 Y
for TS 35 W

with combi foot TS 32/TS 35

Technical data

Input ranges
Overload limits, input
Input resistance
Voltage drop, input
Output
Output frequency, end value
Frequency adjustment
Readjustment range
Output level
Output current
Display
Decoupling diode
Supply voltage
Power consumption
Making current limit
Polarisation protection

Accuracy

Coordination of insulation to DIN VDE 0160, Draft 11/94

Voltage strength input/output
Rated voltage
Rated surge voltage
Overvoltage category
Voltage strength to mounting rail
Operating temperature
Storage temperature
Overall width
Conductor cross-section

Dimensions and accessories see

Type Cat. No.

DKA f/U **8283810001**

Type Cat. No.

DKA f/I **8311870001**

0...50/100/500 Hz

0...50/100/500 Hz

0...1/5/10/16 kHz

0...1/5/10/16 kHz

10 kΩ

10 kΩ

0/2...10 V

0/4...20 mA

DIL switch

DIL switch

24 Vdc ±10 %

24 Vdc ±10 %

32 mA + I_{Load}

32 mA + I_{Load}

yes

yes

0.5 % (8-bit resolution)

0.5 % (8-bit resolution)

2.5 kV


2.5 kV

Page 305


Page 305

Monitoring Revolutions


DK LW

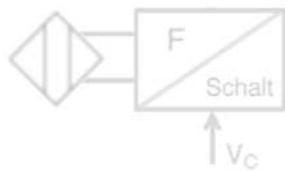

If only one revolution limit is to be evaluated, the potentiometer for f_{\max} must be set to end stop or the potentiometer for f_{\min} to left stop. Then only the other is in each case active for setting the limit value.

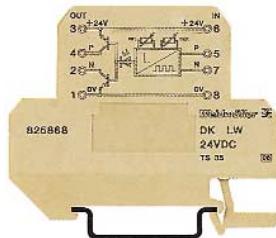

Block diagram/settings

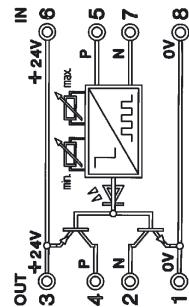

Ordering data

for TS 32	Y
for TS 35	W

Type	Cat. No.
DK LW	8258680000

Technical data

Input	Initiators, NPN or PNP
Number of inputs	1
Input frequency	10 - 6250 U/min.
Range selection	3 switchable revolutions ranges: 10-130, 100-1300, 1000-7800 r.p.m.
Fine adjustment	2 potentiometers for upper/lower revs limit
Input nominal level	24 Vdc = High, 0 V = Low
Overload limits	30 Vdc
Switching threshold	High >18 V, Low <7 V
Pulse duration	>0.5 ms
Input current	approx. 3.5 mA (24 V)
Reverse polarity protection	yes


Output	Optional PNP or NPN
Function	Output active, if f within set revs limit
Output level	Ub- 1.8 V
Output current	20 mA max.
Decoupling diode	yes
Status LED	green LED
Short-circuit proof	no

Operating voltage	24 V –10 % + 20 %
Power consumption	<10 mA, w/o load, without initiator
Reverse polarity protection	yes
Galvanic isolation	no
Voltage strength to mounting rail	4 kV _{eff}
Operating temperature	0...+50 °C
Storage temperature	-40...+60 °C
Overall width	12 mm
Conductor cross-section	0.5...4 mm ²
Insulation stripping length	7 mm


Others	
Accessories	
End plate	Type AP DKT4 Cat. No. 0687560000
Dimensions and accessories see	Page 278

Preprocessing Logic


- Screw connection
- logic function and time function combined
- individually programmable (further functions on request)

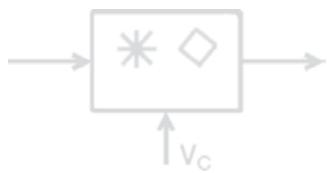

DK PL

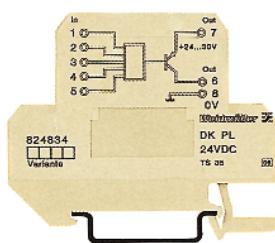

Block diagram

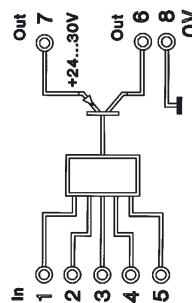

Ordering data

for TS 32	Y	Type on request	Cat. No.
for TS 35	W	DK PL	8248340000*

Technical data


Logical function	Programmable, see note
Number of inputs	5
Input nominal level	24 Vdc = High, 0 V = Low
Overload limits	30 Vdc
Switching threshold	High >18 V, Low <7 V
Pulse duration	>1 ms
Input current	approx. 1.5 mA per input (24 V)
Output	PNP
Output level	Ub- 1 V
Output current	20 mA max.
Decoupling diode	no
Status LED	green LED
Short-circuit proof	no
Operating voltage	24 V ±20 %
Power consumption	<10 mA
Reverse polarity protection	yes
Galvanic isolation	no
Voltage strength to mounting rail	4 kV _{eff}
Operating temperature	0 °C...+50 °C
Storage temperature	-40 °C...+60 °C
Overall width	12 mm
Conductor cross-section	0.5...4 mm ²
Insulation stripping length	7 mm
Accessories	Type Cat. No.
End plate	AD DKT4 0687560000
Ordering example: RS FLIP-FLOP	8248340002
Dimensions see	Page 278

* (not programmed - function next page)

Threshold Monitoring

Current sensor


- Screw connection
- Mounts onto on mounting rail
- Wide spectrum of functions
- In part, individually adjustable

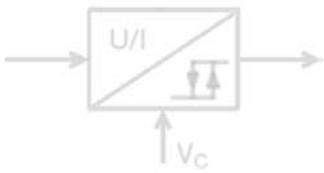

DKSC 0-10 V


DKSC 0-20 mA

DKI 2A

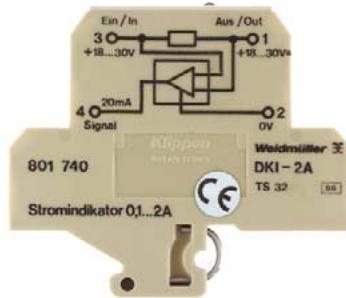

Block diagram/settings

S1	S2	DIP switch
on	on	10...100 mV
on	off	30 mV...1 V
off	X	300 mV...10 V

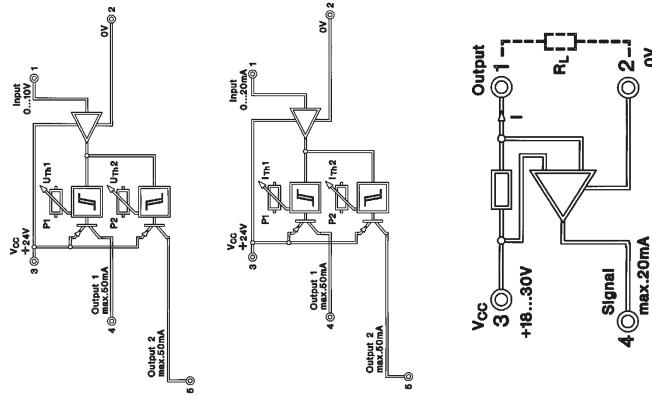

Ordering data

for TS 32	Y
for TS 35	W

with combi foot TS 32/TS 35

Technical data

Input signal	0...10 V
Input resistance	60 kΩ
Voltage drop, input	100 Hz
Cut-off frequency	DIL switch for 3 ranges
Switchable input range	2 threshold Uth 1 and Uth 2 with 2 front potentiometers
Switching point settings	each 1 %
Hysteresis	
Output	double switch output
Output level	per PNP, Ub- 1.2 V
Output current	50 mA
Function	Uin <Uth1: output 1 active Uin >Uth2: output 2 active
Status LED	no
Operating voltage	24 Vdc ±20 %
Power consumption	approx. 15 mA
Galvanic isolation	no
Voltage strength to mounting rail	4 kVeff

Operating temperature	0 °C...+50 °C
Storage temperature	-25 °C...+60 °C
Overall width	6 mm
Conductor cross-section	0.5...4 mm²

EMC resistance

Burst acc. to EN 61000-4-4	Input/outputs
	Power supply
ESD acc. to EN 61000-4-2	Contact discharge
	Air discharge

Accessories	Type	Cat. No.
End plate	AP DK5	8268870000
Dimensions see	Page 278	Page 278

Type	Cat. No.
DKSC 0-10 V	8019640000
DKSC 0-20 mA	8031320000


Type	Cat. No.
DKI 2A	8017400000
DKI 2A	8017410000

Type	Cat. No.
AP DK5	8268870000
AP DK5	8268870000
AP DKT4	0687560000


Threshold Monitoring

MCZ SC 0...10 Vdc


MCZ SC 0...20 mA

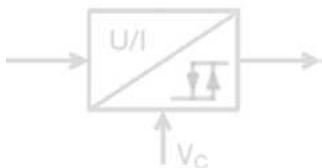

The Setpoint Controller allows cost effective units to be built for monitoring analogue signals. An upper and lower limit value, which covers the entire signal range, can be set by the user via 2 potentiometers. The respective statuses of the upper and lower limit value are indicated at the 2 digital outputs (upper limit value under/over flow; lower limit value under/over flow).

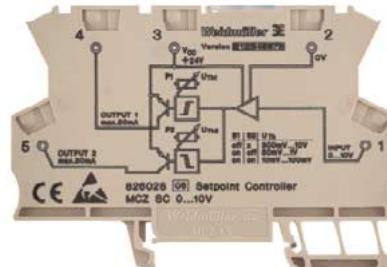

Block diagram

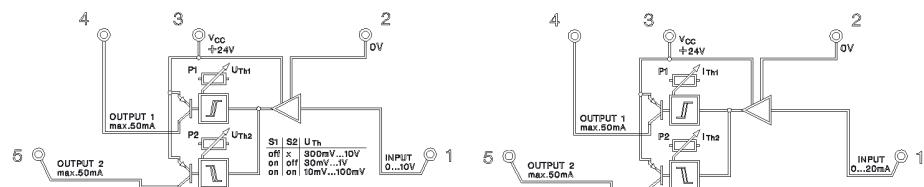

Ordering data for TS 35

Type	Cat. No.
MCZ SC 24 V/0...10V	8260280000

Type	Cat. No.
MCZ SC 24 V/0...20 mA	8227350000

Technical data

Voltage supply

Supply voltage	24 Vdc ± 20 %
Supply current	15 mA

24 Vdc ± 20 %
15 mA

Input

Input voltage	0...10 V
Input resistance	60 kΩ
Voltage drop at full scale	
Max. input current	0.5...20 mA
Cut-off frequency	100 Hz

0.5...20 mA
50 Ω
1 V
40 mA
100 Hz

Transmission behaviour

Threshold voltage ranges of U_{th}	S1 S2 Temperature coefficient T_k	Temperature coefficient T_k 250 ppm max.
10...100 mV	on on	500 ppm max.
0.03...1 V	on off	250 ppm max.
0.3...10 V	off x	250 ppm max.
via 2 potentiometers (12 turns)		
1 % of the end value		
active High for $U_{input} < U_{th1}$ (set via P1)		
active High for $U_{input} > U_{th2}$ (set via P2)		
< 250 µs (switch threshold at 90% of the max. input signal; $R_L \leq 1 \text{ k}\Omega$)		< 250 µs (switch threshold at 90% of the max. input signal; $R_L \leq 1 \text{ k}\Omega$)

via 2 potentiometers (12 turns)

1 % of the end value

active High for $U_{input} < U_{th1}$ (set via P1)

active High for $U_{input} > U_{th2}$ (set via P2)

Output

Output current per output	2 channel switching PNP
Voltage drop at output transistor	max. 50 mA
	< 1.2 V at 50 mA

2 channel switching PNP
max. 50 mA
< 1.2 V at 50 mA

Insulation coordination/safe separation to EN 50178

Separation input / output	none
Dielectric strength I/O to mounting rail	4 kVeff / 1 min
Ambient temperature	0 °C...+50 °C
Storage temperature	-25 °C...+60 °C
Conductor	AWG 22...12
Conductor cross-section	1.5 mm²
Approvals	CE, UL, CSA
Overall width	6 mm
Dimensions and accessories see	Page 305

Passive Isolator DC/DC

WAVEANALOG DC/DC

- input loop powered
- galvanic isolation
- 1-, 2-channel versions
- low power consumption
- safe separation

CCC LP (1 channel)

0(4) ... 20 mA / 0(4) ... 20 mA



CCC LP (2 channel)



0(4) ... 20 mA / 0(4) ... 20 mA



Approvals:



Block diagram

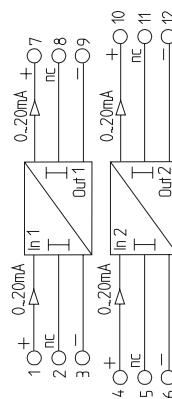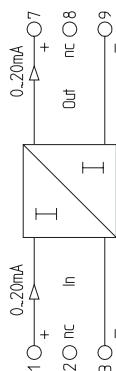

Ordering data

	Type	Cat. No.
Screw connection 1 channel	WAS5 CCC LP	8444950000
Tension clamp connection 1 channel	WAZ5 CCC LP	8444960000
Screw connection 2 channel		
Tension clamp connection 2 channel		
Input/output		0(4) ... 20 mA / 0(4) ... 20 mA

Type

Cat. No.
WAS5 CCC LP
WAZ5 CCC LP
0(4) ... 20 mA / 0(4) ... 20 mA

Technical data* (per channel)

Input signal	0 ... 20 mA (4 ... 20 mA)
Input voltage max.	18 V
Input current max	50 mA
Operating current	< 100 µA
Voltage drop	approx. 3 V at $R_L = 0 \Omega$ $I_{in} = 20 \text{ mA}$ approx. 13 V at $R_L = 500 \Omega$ at $I_{in} = 20 \text{ mA}$

Output signal	0 ... 20 mA (4 ... 20 mA)
Load resistance	≤ 500 Ω
Accuracy at $T_u=23^\circ\text{C}$	< 0.1% of FS
Influence of load resistance	< 0.1% from measurement value per 100 Ω load resistance
Temperature coefficient	50 ppm / K of FS
Set time	4.5 ms at 500 Ω working resistance
Residual ripple	< 20 mV _{eff}
Chopper frequency	approx. 170 kHz

Type

Cat. No.
WAS5 CCC LP
WAZ5 CCC LP
0(4) ... 20 mA / 0(4) ... 20 mA

General

Operating temperature	-25 °C ... +70 °C
Storage temperature	-40 °C ... +80 °C
Dimensions L / H / W mm	92.4 / 112.5 / 17.5
Approvals	CE, UL, CSA, GL

Type

Cat. No.
WAS5 CCC LP
WAZ5 CCC LP
0(4) ... 20 mA / 0(4) ... 20 mA

Coordination of insulation according to EN 50178, 04/98 (safe separation)

Rated voltage	300 V
Rated surge voltage	6 kV
Oversurge category	III
Contamination class	2
Clearance and creepage distance	≥ 5.5 mm
Isolation voltage, voltage strength	4 kV _{eff} / 1 s
Input/output, channel / channel	4 kV _{eff} / 1 min
Input/output to mounting rail	EN 50178 (safe separation)
Standards/specifications	EN 50081, EN 50082, EN 55011
EMC standards	Page 298 + 308
Dimensions and accessories see	

Type

Rated voltage	300 V
Rated surge voltage	6 kV
Oversurge category	III
Contamination class	2
Clearance and creepage distance	≥ 5.5 mm
Isolation voltage, voltage strength	4 kV _{eff} / 1 s
Input/output, channel / channel	4 kV _{eff} / 1 min
Input/output to mounting rail	EN 50178 (safe separation)
Standards/specifications	EN 50081, EN 50082, EN 55011
EMC standards	Page 298 + 308
Dimensions and accessories see	

*Tu = 23 °C single module

DC/DC-Signal Conditioners


WAVEANALOG DC/DC

- voltage supply on output side
- 2-way-isolation
- analogue signal conditioning
- galvanic isolation between input/output signal
- Input loop powered
- cross-connectable voltage supply via cross-connectors

Approvals:



Block diagram

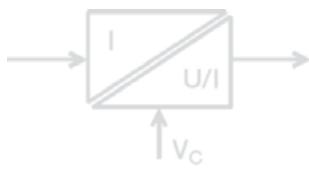

CCC DC

4 ... 20 mA / 4 ... 20 mA



CCC DC

4 ... 20 mA / 0 ... 20 mA



CVC DC

4 ... 20 mA / 0 ... 10 V



Ordering data

Screw connection

Tension clamp connection

Input/output

Type Cat. No.

WAS4 CCC DC 8444980000

WAZ4 CCC DC 8444990000

4 ... 20 mA / 4...20 mA

Type Cat. No.

WAS4 CCC DC 8445010000

WAZ4 CCC DC 8445020000

4 ... 20 mA / 0 ... 20 mA

Type Cat. No.

WAS4 CVC DC 8445040000

WAZ4 CVC DC 8445050000

4 ... 20 mA / 0 ... 10V

Technical data*

Input signal

Input voltage max.

Input current max

Output signal

Load resistance

Accuracy at Tu=23 °C

Temperature coefficient

Response time

Cut-off frequency (-3 dB)

4 ... 20 mA

7 V

25 mA

4 ... 20 mA

≤ 500 Ω

± 0.2% of FS

≤ 250 ppm / K of FS

≤ 30 ms (typ. 20 ms)

≥ 15 Hz (typ. 20 Hz)

4 ... 20 mA

7 V

25 mA

0 ... 20 mA

≤ 500 Ω

± 0.2% of FS

≤ 250 ppm / K of FS

≤ 30 ms (typ. 20 ms)

≥ 15 Hz (typ. 20 Hz)

4 ... 20 mA

7 V

25 mA

0 ... 10 V

≥ 1 kΩ

± 0.2% of FS

≤ 250 ppm / K of FS

≤ 30 ms (typ. 20 ms)

≥ 15 Hz (typ. 20 Hz)

General

Voltage supply

24 Vdc ±20%

(19.2 ... 28.8 Vdc)

24 Vdc ±20%

(19.2 ... 28.8 Vdc)

Power consumption

< 32 mA at I_{out} = 20 mA

< 20 mA at I_{out} = 10 mA

Current carrying capacity of cross-connection

≤ 2 A

≤ 2 A

Operating temperature

0 °C ... +55 °C (mounted)

0 °C ... +55 °C (mounted)

Storage temperature

-20 °C ... +85 °C

-20 °C ... +85 °C

Dimensions L / H / W mm

92.4 / 112.5 / 12.5

92.4 / 112.5 / 12.5

Approvals

CE, UL, CSA

CE, UL, CSA

Coordination of insulation according to EN 50178, 04/98

Rated voltage

300 V

300 V

300 V

Rated surge voltage

4 kV

4 kV

4 kV

Overvoltage category

III

III

III

Contamination class

2

2

2

Clearance and creepage distance

≥ 3 mm

≥ 3 mm

≥ 3 mm

Isolation voltage, voltage strength

4 kV_{eff} / 1 min

4 kV_{eff} / 1 min

4 kV_{eff} / 1 min

Input/output to mounting rail

Standards/specifications

EN 50178

EN 50178

EN 50178

EMC standards

EN 50081, EN 50082,

EN 50081, EN 50082,

EN 50081, EN 50082,

EN 55011

EN 55011

EN 55011

Dimensions and accessories see

Page 298 + 308

Page 298 + 308

Page 298 + 308

*Tu = 23 °C single module

DC/DC-Signal Conditioners


WAVEANALOG DC/DC

- voltage supply on both sides
- 2-way-isolation
- analogue signal conditioning
- galvanic isolation between input/output signal
- cross-connectable voltage supply via cross-connectors

Approvals:



Block diagram

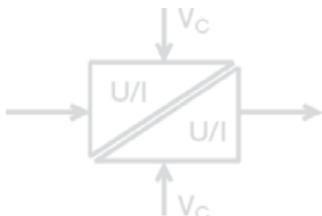

CCC DC

0 ... 20 mA / 0 ... 20 mA



CCC DC

0 ... 20 mA / 4 ... 20 mA



CVC DC

0 ... 20 mA / 0 ... 10 V



Ordering data

	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
Screw connection	WAS4 CCC DC	8445070000	WAS4 CCC DC	8446970000	WAS4 CVC DC	8447020000
Tension clamp connection	WAZ4 CCC DC	8445080000	WAZ4 CCC DC	8446990000	WAZ4 CVC DC	8447030000
Input/output	0 ... 20 mA / 0 ... 20 mA		0 ... 20 mA / 4 ... 20 mA		0 ... 20 mA / 0 ... 10 V	

Technical data*

Input signal

Input current max	0 ... 20 mA
Input resistance	25 mA
	50 Ω
Output signal	0 ... 20 mA
Load resistance	≤ 500 Ω
Accuracy at Tu=23 °C	± 0.2% of FS
Temperature coefficient	≤ 250 ppm / K of FS
Response time	≤ 30 ms (typ. 16 ms)
Cut-off frequency (-3 dB)	≥ 15 Hz (typ. 25 Hz)

Input current max	0 ... 20 mA
Input resistance	25 mA
	50 Ω
Output signal	4 ... 20 mA
Load resistance	≤ 500 Ω
Accuracy at Tu=23 °C	± 0.2% of FS
Temperature coefficient	≤ 250 ppm / K of FS
Response time	≤ 30 ms (typ. 16 ms)
Cut-off frequency (-3 dB)	≥ 15 Hz (typ. 25 Hz)

General

Voltage supply	24 Vdc ±20%	24 Vdc ±20%	24 Vdc ±20%
	(19.2 ... 28.8 Vdc)	(19.2 ... 28.8 Vdc)	(19.2 ... 28.8 Vdc)
Power consumption input	< 11 mA at I_{in} = 20 mA	< 11 mA at I_{in} = 20 mA	< 11 mA at I_{in} = 20 mA
Power consumption output	< 32 mA at I_{out} = 20 mA	< 32 mA at I_{out} = 20 mA	< 20 mA at I_{out} = 10 V
Current carrying capacity of cross-connection	≤ 2 A	≤ 2 A	≤ 2 A
Operating temperature	0 °C ... +55 °C (mounted)	0 °C ... +55 °C (mounted)	0 °C ... +55 °C (mounted)
Storage temperature	-20 °C ... +85 °C	-20 °C ... +85 °C	-20 °C ... +85 °C
Dimensions L / H / W mm	92.4 / 112.5 / 12.5	92.4 / 112.5 / 12.5	92.4 / 112.5 / 12.5
Approvals	CE, UL, CSA	CE, UL, CSA	CE, UL, CSA

Coordination of insulation according to EN 50178, 04/98

Rated voltage	300 V	300 V	300 V
Rated surge voltage	4 kV	4 kV	4 kV
Overvoltage category	III	III	III
Contamination class	2	2	2
Clearance and creepage distance	≥ 3 mm	≥ 3 mm	≥ 3 mm
Isolation voltage, voltage strength	4 kV _{eff} / 1 min	4 kV _{eff} / 1 min	4 kV _{eff} / 1 min
Input/output to mounting rail			
Standards/specifications	EN 50178	EN 50178	EN 50178
EMC standards	EN 50081, EN 50082, EN 55011	EN 50081, EN 50082, EN 55011	EN 50081, EN 50082, EN 55011
Dimensions and accessories see	Page 298 + 308	Page 298 + 308	Page 298 + 308

*Tu = 23 °C single module

DC/DC Signal Conditioners


WAVEANALOG DC/DC

- voltage supply on both sides
- 2-way-isolation
- analogue signal conditioning
- galvanic isolation between input/output signal
- cross-connectable voltage supply via cross-connectors

Approvals:



Block diagram

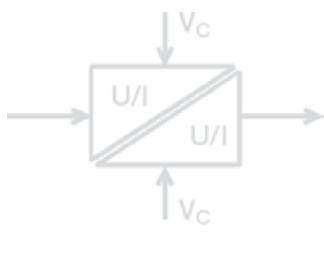

VCC DC

0 ... 10 V / 0 ... 20 mA



VCC DC

0 ... 10 V / 4 ... 20 mA



VVC DC

0 ... 10 V / 0 ... 10 V



Ordering data

	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
Screw connection	WAS4 VCC DC	8447050000	WAS4 VCC DC	8447100000	WAS4 VVC DC	8447130000
Tension clamp connection	WAZ4 VCC DC	8447080000	WAZ4 VCC DC	8447110000	WAZ4 VVC DC	8447140000
Input/output	0 ... 10 V / 0 ... 20 mA		0 ... 10 V / 4 ... 20 mA		0 ... 10 V / 0 ... 10 V	

Technical data*

Input signal	0 ... 10 V	0 ... 10 V	0 ... 10 V
Input voltage max.	15 V	15 V	15 V
Input resistance	500 kΩ	500 kΩ	500 kΩ
Output signal	0 ... 20 mA	4 ... 20 mA	0 ... 10 V
Load resistance	≤ 500 Ω	≤ 500 Ω	≥ 1 kΩ
Accuracy at Tu=23°C	± 0.2% of FS	± 0.2% of FS	± 0.2% of FS
Temperature coefficient	≤ 250 ppm / K of FS	≤ 250 ppm / K of FS	≤ 250 ppm / K of FS
Response time	≤ 30 ms (typ. 25 ms)	≤ 30 ms (typ. 25 ms)	≤ 30 ms (typ. 25 ms)
Cut-off frequency (-3 dB)	≥ 13 Hz (typ. 17 Hz)	≥ 13 Hz (typ. 17 Hz)	≥ 13 Hz (typ. 17 Hz)

General

Voltage supply	24 Vdc ±20% (19.2 ... 28.8 Vdc)	24 Vdc ±20% (19.2 ... 28.8 Vdc)	24 Vdc ±20% (19.2 ... 28.8 Vdc)
Power consumption input	< 11 mA at U _{in} = 10 V	< 11 mA at U _{in} = 10 V	< 11 mA at U _{in} = 10 V
Power consumption output	< 32 mA at I _{out} = 20 mA	< 32 mA at I _{out} = 20 mA	< 20 mA at I _{out} = 10 mA
Current carrying capacity of cross-connection	≤ 2 A	≤ 2 A	≤ 2 A
Operating temperature	0 °C ... +55 °C (mounted)	0 °C ... +55 °C (mounted)	0 °C ... +55 °C (mounted)
Storage temperature	-20 °C ... +85 °C	-20 °C ... +85 °C	-20 °C ... +85 °C
Dimensions L / H / W mm	92.4 / 112.5 / 12.5	92.4 / 112.5 / 12.5	92.4 / 112.5 / 12.5
Approvals	CE, UL, CSA	CE, UL, CSA	CE, UL, CSA

Coordination of insulation according to EN 50178, 04/98

Rated voltage	300 V	300 V	300 V
Rated surge voltage	4 kV	4 kV	4 kV
Overvoltage category	III	III	III
Contamination class	2	2	2
Clearance and creepage distance	≥ 3 mm	≥ 3 mm	≥ 3 mm
Isolation voltage, voltage strength	4 kV _{eff} / 1 min	4 kV _{eff} / 1 min	4 kV _{eff} / 1 min
Input/output to mounting rail			
Standards/specifications	EN 50178	EN 50178	EN 50178
EMC standards	EN 50081, EN 50082, EN 55011	EN 50081, EN 50082, EN 55011	EN 50081, EN 50082, EN 55011
Dimensions and accessories see	Page 298 + 308	Page 298 + 308	Page 298 + 308

*Tu = 23 °C single module

DC/DC Signal Conditioners


WAVEANALOG DC/DC

- 3-way-isolation
- analogue signal conditioning
- indication LED
- cross-connectable voltage supply via cross-connectors

Approvals:



Block diagram

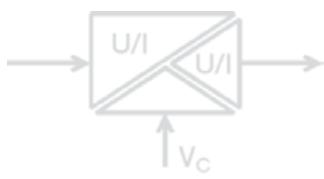

CCC

0 ... 20 mA / 0 ... 20 mA



CCC

0 ... 20 mA / 4 ... 20 mA



CVC

0 ... 20 mA / 0 ... 10 V



Ordering data

Type	Cat. No.
WAS5 CCC	8540180000*
WAZ5 CCC	8540190000*
0 ... 20 mA / 0 ... 20 mA	

Type	Cat. No.
WAS5 CCC	8540250000
WAZ5 CCC	8540260000
0 ... 20 mA / 4 ... 20 mA	

Type	Cat. No.
WAS5 CVC	8540270000
WAZ5 CVC	8540280000
0 ... 20 mA / 0 ... 10 V	

Technical data**

Input signal

Input current max	0 ... 20 mA
	25 mA
Input resistance	$\leq 110 \Omega$
Output signal	0 ... 20 mA
Load resistance	$\leq 600 \Omega$
Accuracy at $T_u=23^\circ\text{C}$	0.2%
Temperature coefficient	$\pm 250 \text{ ppm} / K$
Response time	$\leq 45 \text{ ms}$
Cut-off frequency (-3 dB)	10 Hz

0 ... 20 mA	0 ... 20 mA
25 mA	25 mA
$\leq 110 \Omega$	$\leq 110 \Omega$
4 ... 20 mA	4 ... 20 mA
$\leq 600 \Omega$	$\leq 600 \Omega$
0.2%	0.2%
$\pm 250 \text{ ppm} / K$	$\pm 250 \text{ ppm} / K$
$\leq 45 \text{ ms}$	$\leq 45 \text{ ms}$
10 Hz	10 Hz

0 ... 20 mA	0 ... 20 mA
25 mA	25 mA
$\leq 110 \Omega$	$\leq 110 \Omega$
0 ... 10 V	0 ... 10 V
$\geq 1 \text{ k}\Omega$	$\geq 1 \text{ k}\Omega$
0.2%	0.2%
$\pm 250 \text{ ppm} / K$	$\pm 250 \text{ ppm} / K$
$\leq 45 \text{ ms}$	$\leq 45 \text{ ms}$
10 Hz	10 Hz

General

Voltage supply	24 Vdc $\pm 25\%$
	(18 Vdc ... 24 Vdc ... 30 Vdc)
Power consumption	$< 1.5 \text{ W}$ at $I_{out} = 20 \text{ mA}$
Current carrying capacity of cross-connection	$\leq 2 \text{ A}$
Operating temperature	$0^\circ\text{C} ... +55^\circ\text{C}$
Storage temperature	$-20^\circ\text{C} ... +85^\circ\text{C}$
Dimensions L / H / W mm	92.4 / 112.5 / 17.5
Approvals	CE, cUL

24 Vdc $\pm 25\%$	24 Vdc $\pm 25\%$
(18 Vdc ... 24 Vdc ... 30 Vdc)	(18 Vdc ... 24 Vdc ... 30 Vdc)
$< 1.5 \text{ W}$ at $I_{out} = 20 \text{ mA}$	$< 1.3 \text{ W}$ at $I_{out} = 5 \text{ mA}$
$\leq 2 \text{ A}$	$\leq 2 \text{ A}$
$0^\circ\text{C} ... +55^\circ\text{C}$	$0^\circ\text{C} ... +55^\circ\text{C}$
when mounted horizontally	when mounted horizontally
$-20^\circ\text{C} ... +85^\circ\text{C}$	$-20^\circ\text{C} ... +85^\circ\text{C}$
92.4 / 112.5 / 17.5	92.4 / 112.5 / 17.5
CE, cUL	CE, cUL

Coordination of insulation according to EN 50178, 04/98

Rated voltage	300 V
Rated surge voltage	4 kV
Overvoltage category	III
Contamination class	2
Clearance and creepage distance	$\geq 3 \text{ mm}$
Coupling capacity	1 nF
Input / output supply	1 nF
Isolation voltage, voltage strength	$4 \text{ kV}_{eff} / 1 \text{ min}$
Input/output to mounting rail	$4 \text{ kV}_{eff} / 1 \text{ min}$
Standards/specifications	EN 50178
EMC standards	EN 50081, EN 50082, EN 55011
Dimensions and accessories see	Page 298 + 308

300 V	300 V
4 kV	4 kV
III	III
2	2
$\geq 3 \text{ mm}$	$\geq 3 \text{ mm}$
1 nF	1 nF
$4 \text{ kV}_{eff} / 1 \text{ min}$	$4 \text{ kV}_{eff} / 1 \text{ min}$
EN 50178	EN 50178
EN 50081, EN 50082, EN 55011	EN 50081, EN 50082, EN 55011
Page 298 + 308	Page 298 + 308

** $T_u = 23^\circ\text{C}$ single module

* Input/output 4 ... 20 mA/4 ... 20 mA possible

DC/DC Signal Conditioners


WAVEANALOG DC/DC

- 3-way-isolation
- analogue signal conditioning
- indication LED
- cross-connectable voltage supply via cross-connectors

Approvals:



Block diagram

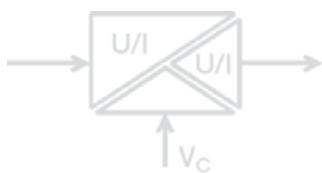

CCC

4 ... 20 mA / 0 ... 20 mA



CVC

4 ... 20 mA / 0 ... 10 V



Ordering data

Screw connection

Tension clamp connection

Input/output

Type

WAS5 CCC

WAZ5 CCC

4 ... 20 mA / 0 ... 20 mA

Cat. No.

Type

WAS5 CVC

WAZ5 CVC

4 ... 20 mA / 0 ... 10 V

Cat. No.

854020000000

8540210000

Technical data

Input signal

Input current max

Input resistance

Output signal

Load resistance

Accuracy at $T_u=23^\circ\text{C}$

Temperature coefficient

Response time

Cut-off frequency (-3 dB)

4 ... 20 mA

25 mA

$\leq 110 \Omega$

0 ... 20 mA

$\leq 600 \Omega$

0.2%

$\pm 250 \text{ ppm} / \text{K}$

$\leq 45 \text{ ms}$

10 Hz

4 ... 20 mA

25 mA

$\leq 110 \Omega$

0 ... 10 V

$\geq 1 \text{ k}\Omega$

0.2%

$\pm 250 \text{ ppm} / \text{K}$

$\leq 45 \text{ ms}$

10 Hz

General*

Voltage supply

24 Vdc $\pm 25\%$

(18 Vdc ... **24 Vdc** ... 30 Vdc)

24 Vdc $\pm 25\%$

(18 Vdc ... **24 Vdc** ... 30 Vdc)

Power consumption

< 1.5 W at $I_{out} = 20 \text{ mA}$

Current carrying capacity of cross-connection

$\leq 2 \text{ A}$

Operating temperature

$0^\circ\text{C} \dots +55^\circ\text{C}$

when mounted horizontally

when mounted horizontally

Storage temperature

-20 °C ... +85 °C

Dimensions L / H / W mm

92.4 / 112.5 / 17.5

Approvals

CE, cUL

Coordination of insulation according to EN 50178, 04/98

Rated voltage

300 V

300 V

Rated surge voltage

4 kV

4 kV

Overvoltage category

III

III

Contamination class

2

2

Clearance and creepage distance

$\geq 3 \text{ mm}$

$\geq 3 \text{ mm}$

Coupling capacity

1 nF

1 nF

Input / output to supply

$4 \text{ kV}_{eff} / 1 \text{ min}$

$4 \text{ kV}_{eff} / 1 \text{ min}$

Isolation voltage, voltage strength

$4 \text{ kV}_{eff} / 1 \text{ min}$

Input/output to mounting rail

$4 \text{ kV}_{eff} / 1 \text{ min}$

Standards/specifications

EN 50178

EN 50178

EMC standards

EN 50081, EN 50082,

EN 50081, EN 50082,

EN 55011

EN 55011

Dimensions and accessories see

Page 298 + 308

Page 298 + 308

* $T_u = 23^\circ\text{C}$ single module

DC/DC Signal Conditioners

WAVEANALOG DC/DC

- 3-way-isolation
- analogue signal conditioning
- indication LED
- cross-connectable voltage supply via cross-connectors

VCC

0 ... 10 V / 0 ... 20 mA



VCC

0 ... 10 V / 4 ... 20 mA



VVC





0 ... 10 V / 0 ... 10 V



Approvals:



Block diagram

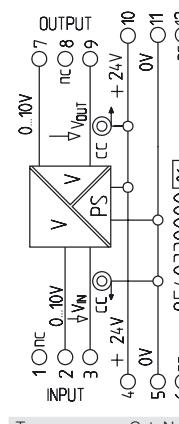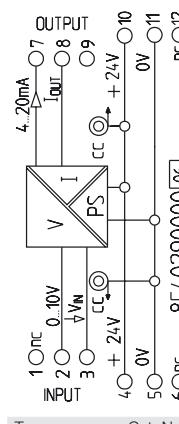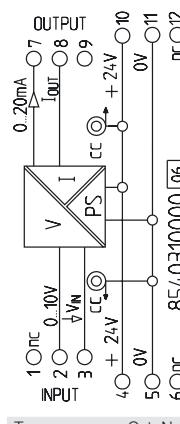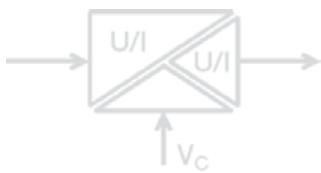

Ordering data

	Type	Cat. No.
Screw connection	WAS5 VCC	8540310000
Tension clamp connection	WAZ5 VCC	8540320000
Input/output	0 ... 10 V / 0 ... 20 mA	8540310000 [6]

	Type	Cat. No.
	WAS5 VCC	8540290000
	WAZ5 VCC	8540300000
	0 ... 10 V / 4 ... 20 mA	8540290000 [6]

	Type	Cat. No.
	WAS5 VVC	8540330000
	WAZ5 VVC	8540340000
	0 ... 10 V / 0 ... 10 V	8540330000 [6]

Technical data*

Input signal

Input voltage max.	0 ... 10 V
Input resistance	typ. 100 kΩ
	0 ... 20 mA

Output signal	0 ... 10 V
Load resistance	≤ 600 Ω
Accuracy at Tu=23 °C	0.2%
Temperature coefficient	± 250 ppm / K
Response time	≤ 45 ms
Cut-off frequency (-3 dB)	10 Hz

Output signal	0 ... 10 V
Load resistance	≤ 600 Ω
Accuracy at Tu=23 °C	0.2%
Temperature coefficient	± 250 ppm / K
Response time	≤ 45 ms
Cut-off frequency (-3 dB)	10 Hz

General

Voltage supply	24 Vdc ±25%
(18 Vdc ... 24 Vdc ... 30 Vdc)	(18 Vdc ... 24 Vdc ... 30 Vdc)
Power consumption	< 1.5 W at I _{out} = 20 mA
Current carrying capacity of cross-connection	≤ 2 A
Operating temperature	0 °C ... +55 °C
Storage temperature	when mounted horizontally
Dimensions L / H / W mm	-20 °C ... +85 °C
Approvals	92.4 / 112.5 / 17.5

Voltage supply	24 Vdc ±25%
(18 Vdc ... 24 Vdc ... 30 Vdc)	(18 Vdc ... 24 Vdc ... 30 Vdc)
Power consumption	< 1.5 W at I _{out} = 20 mA
Current carrying capacity of cross-connection	≤ 2 A
Operating temperature	0 °C ... +55 °C
Storage temperature	when mounted horizontally
Dimensions L / H / W mm	-20 °C ... +85 °C
Approvals	92.4 / 112.5 / 17.5

Coordination of insulation according to EN 50178, 04/98

Rated voltage	300 V
Rated surge voltage	4 kV
Overvoltage category	III
Contamination class	2
Clearance and creepage distance	≥ 3 mm
Coupling capacity	
Input / output to supply	1 nF
Isolation voltage, voltage strength	4 kV _{eff} / 1 min
Input/output to mounting rail	4 kV _{eff} / 1 min
Standards/specifications	EN 50178
EMC standards	EN 50081, EN 50082, EN 55011
Dimensions and accessories see	Page 298 + 308

Rated voltage	300 V
Rated surge voltage	4 kV
Overvoltage category	III
Contamination class	2
Clearance and creepage distance	≥ 3 mm
Coupling capacity	
Input / output to supply	1 nF
Isolation voltage, voltage strength	4 kV _{eff} / 1 min
Input/output to mounting rail	4 kV _{eff} / 1 min
Standards/specifications	EN 50178
EMC standards	EN 50081, EN 50082, EN 55011
Dimensions and accessories see	Page 298 + 308

*Tu = 23 °C single module

DC/DC Signal Conditioners


WAVEANALOG DC/DC 20 kHz

- 3-way-isolation
- transmission frequency 20 kHz
- analogue signal conditioning
- cross-connectable voltage supply via cross-connectors

Approvals:



Block diagram

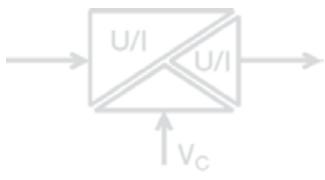

Ordering data

Screw connection	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
WAS5 CCC HF	8447160000*	WAS5 CCC HF	8447190000	WAS5 CVC HF	8447220000	
WAZ5 CCC HF	8447170000*	WAZ5 CCC HF	8447200000	WAZ5 CVC HF	8447230000	
Input/output	0 ... 20 mA / 0 ... 20 mA		0 ... 20 mA / 4 ... 20 mA		0 ... 20 mA / 0 ... 10 V	

Technical data**

Input signal

Input current max	0 ... 20 mA	0 ... 20 mA	0 ... 20 mA
Input resistance	50 mA	50 mA	50 mA
	50 Ω	50 Ω	50 Ω

Output signal

Load resistance	0 ... 20 mA	0 ... 20 mA	0 ... 20 mA
Accuracy at Tu=23 °C	≤ 500 Ω	≤ 500 Ω	≤ 2 kΩ
Temperature coefficient	< 0.2% of FS	< 0.2% of FS	< 0.2% of FS
Response time	≤ 250 ppm / K of FS	≤ 250 ppm / K of FS	≤ 250 ppm / K of FS
Cut-off frequency (-3 dB)	≤ 40 µs (typ. 30 µs)	≤ 40 µs (typ. 30 µs)	≤ 40 µs (typ. 30 µs)
	≥ 15 kHz (typ. 20 kHz)	≥ 15 kHz (typ. 20 kHz)	≥ 15 kHz (typ. 20 kHz)

General

Voltage supply	24 Vdc ±25% (18 ... 30 Vdc)	24 Vdc ±25% (18 ... 30 Vdc)	24 Vdc ±25% (18 ... 30 Vdc)
Power consumption	< 1.5 W at I _{out} = 20 mA	< 1.5 W at I _{out} = 20 mA	< 1.3 W at I _{out} = 5 mA
Current carrying capacity of cross-connection	≤ 2 A	≤ 2 A	≤ 2 A
Operating temperature	0 °C ... +55 °C	0 °C ... +55 °C	0 °C ... +55 °C
Storage temperature	-20 °C ... +85 °C	-20 °C ... +85 °C	-20 °C ... +85 °C
Dimensions L / H / W mm	92.4 / 112.5 / 17.5	92.4 / 112.5 / 17.5	92.4 / 112.5 / 17.5
Approvals	CE, UL, CSA	CE, UL, CSA	CE, UL, CSA

Coordination of insulation according to EN 50178, 04/98

Rated voltage	300 V	300 V	300 V
Rated surge voltage	4 kV	4 kV	4 kV
Oversupply category	III	III	III
Contamination class	2	2	2
Clearance and creepage distance	≥ 3 mm	≥ 3 mm	≥ 3 mm
Coupling capacity			
Input / output to supply	1 nF	1 nF	1 nF
Isolation voltage, voltage strength	4 kV _{eff} / 1 min	4 kV _{eff} / 1 min	4 kV _{eff} / 1 min
Input/output to mounting rail			

Standards/specifications	EN 50178	EN 50178	EN 50178
EMC standards	EN 50081, EN 50082, EN 55011	EN 50081, EN 50082, EN 55011	EN 50081, EN 50082, EN 55011

Dimensions and accessories see Page 298 + 308

**Tu = 23 °C single module

* Input/output 4 ... 20 mA/4 ... 20 mA possible

CCC HF

0 ... 20 mA / 0 ... 20 mA



CCC HF

0 ... 20 mA / 4 ... 20 mA



CVC HF

0 ... 20 mA / 0 ... 10 V



DC/DC Signal Conditioners


WAVEANALOG DC/DC 20 kHz

- 3-way-isolation
- transmission frequency 20 kHz
- analogue signal conditioning
- cross-connectable voltage supply via cross-connectors

Approvals:



Block diagram

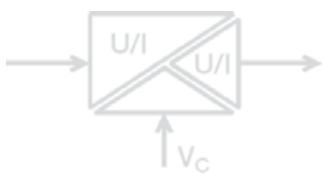



CCC HF

4 ... 20 mA / 0 ... 20 mA



CVC HF

4 ... 20 mA / 0 ... 10 V

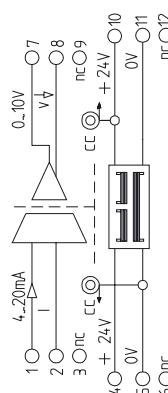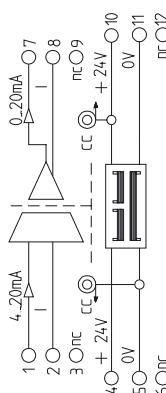

Ordering data

Screw connection	Type	Cat. No.
Tension clamp connection	WAS5 CCC HF	8447250000
Input/output	WAZ5 CCC HF	8447260000

4 ... 20 mA / 0 ... 20 mA

Type Cat. No.

WAS5 CVC HF 8447280000

WAZ5 CVC HF 8447290000

4 ... 20 mA / 0 ... 10 V

Technical data*

Input signal	4 ... 20 mA
Input current max	50 mA
Input resistance	50 Ω
Output signal	0 ... 20 mA
Load resistance	≤ 500 Ω
Accuracy at Tu=23 °C	< 0.2% of FS
Temperature coefficient	≤ 250 ppm / K of FS
Response time	≤ 40 µs (typ. 30 µs)
Cut-off frequency (-3 dB)	≥ 15 kHz (typ. 20 kHz)

4 ... 20 mA

4 ... 20 mA

General

Voltage supply	24 Vdc ±25% (18 ... 30 Vdc)
Power consumption	< 1.5 W at I _{out} = 20 mA
Current carrying capacity of cross-connection	≤ 2 A
Operating temperature	0 °C ... +55 °C
Storage temperature	-20 °C ... +85 °C
Dimensions L / H / W mm	92.4 / 112.5 / 17.5
Approvals	CE, UL, CSA

24 Vdc ±25% (18 ... 30 Vdc)

24 Vdc ±25% (18 ... 30 Vdc)

Coordination of insulation according to EN 50178, 04/98	
Rated voltage	300 V
Rated surge voltage	4 kV
Oversurge category	III
Contamination class	2
Clearance and creepage distance	≥ 3 mm
Coupling capacity	1 nF
Input / output to supply	1 nF
Isolation voltage, voltage strength	4 kV _{eff} / 1 min
Input/output to mounting rail	4 kV _{eff} / 1 min
Standards/specifications	EN 50178
EMC standards	EN 50081, EN 50082, EN 55011

300 V

300 V

4 kV

4 kV

III

III

2

2

≥ 3 mm

≥ 3 mm

1 nF

1 nF

4 kV_{eff} / 1 min

4 kV_{eff} / 1 min

EN 50178

EN 50178

EN 50081, EN 50082,

EN 50081, EN 50082

EN 55011

EN 55011

Dimensions and accessories see

Page 298 + 308

*Tu = 23 °C single module

DC/DC Signal Conditioners


WAVEANALOG DC/DC 20 kHz

- 3-way-isolation
- transmission frequency 20 kHz
- analogue signal conditioning
- cross-connectable voltage supply via cross-connectors

Approvals:



Block diagram

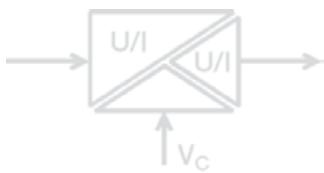

Ordering data

Screw connection	Type	Cat. No.
Tension clamp connection	WAS5 VCC HF	8447310000
Input/output	WAZ5 VCC HF	8447320000



VCC HF

0 ... 10 V / 0 ... 20 mA



VCC HF

0 ... 10 V / 4 ... 20 mA

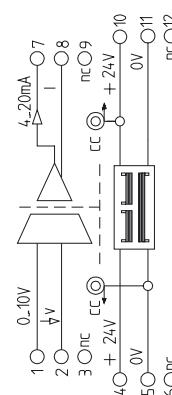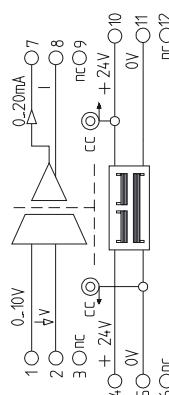

Technical data*

Input signal

Input voltage max.	0 ... 10 V
Input resistance	15 V
	500 kΩ

Output signal

Load resistance	0 ... 20 mA
Accuracy at Tu=23 °C	≤ 500 Ω
Temperature coefficient	± 0.2% of FS
Response time	≤ 250 ppm / K of FS
Cut-off frequency (-3 dB)	≤ 40 µs (typ. 30 µs)

General

Voltage supply	24 Vdc ±25% (18 ... 30 Vdc)
Power consumption	< 1.5 W at I _{out} = 20 mA
Current carrying capacity of cross-connection	≤ 2 A
Operating temperature	0 °C ... +55 °C
Storage temperature	-20 °C ... +85 °C
Dimensions L / H / W mm	92.4 / 112.5 / 17.5
Approvals	CE, UL, CSA

Coordination of insulation according to EN 50178, 04/98

Rated voltage	300 V
Rated surge voltage	4 kV
Oversurge category	III
Contamination class	2
Clearance and creepage distance	≥ 3 mm
Coupling capacity	
Input / output to supply	1 nF
Isolation voltage, voltage strength	4 kVeff / 1 min
Input/output to mounting rail	
Standards/specifications	EN 50178
EMC standards	EN 50081, EN 50082, EN 55011

Dimensions and accessories see

Type

Cat. No.

Type

Cat. No.

WAS5 VCC HF

WAZ5 VCC HF

0 ... 10 V / 4 ... 20 mA

0 ... 10 V

15 V

500 kΩ

0 ... 10 V

15 V

500 kΩ

4 ... 20 mA

4 ... 20 mA

≤ 500 Ω

≤ 500 Ω

± 0.2% of FS

± 0.2% of FS

≤ 250 ppm / K of FS

≤ 250 ppm / K of FS

≤ 40 µs (typ. 30 µs)

≤ 40 µs (typ. 30 µs)

≥ 15 kHz (typ. 20 kHz)

≥ 15 kHz (typ. 20 kHz)

Voltage supply

24 Vdc ±25% (18 ... 30 Vdc)

< 1.5 W at I_{out} = 20 mA

< 1.5 W at I_{out} = 20 mA

≤ 2 A

≤ 2 A

0 °C ... +55 °C

0 °C ... +55 °C

-20 °C ... +85 °C

-20 °C ... +85 °C

92.4 / 112.5 / 17.5

92.4 / 112.5 / 17.5

CE, UL, CSA

CE, UL, CSA

Coordination of insulation according to EN 50178, 04/98

300 V

300 V

4 kV

4 kV

III

III

2

2

≥ 3 mm

≥ 3 mm

1 nF

1 nF

4 kVeff / 1 min

4 kVeff / 1 min

EN 50178

EN 50178

EN 50081, EN 50082,

EN 50081, EN 50082

EN 55011

EN 55011

Page 298 + 308

Page 298 + 308


*Tu = 23 °C single module

DC/DC Signal Conditioners

WAVEANALOG DC/DC 20 kHz

- 3-way-isolation
- transmission frequency 20 kHz
- analogue signal conditioning
- cross-connectable voltage supply via cross-connectors

Block diagram

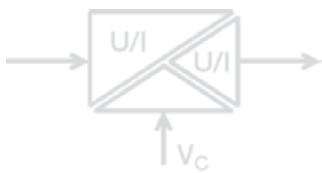

Ordering data

Screw connection	Type	WAS5 VVC HF	Cat. No.	8447370000
Tension clamp connection		WAZ5 VVC HF		8447380000
Input/output		0 ... 10 V / 0 ... 10 V		

Technical data*

Input signal	0 ... 10 V
Input voltage max.	15 V
Input resistance	500 kΩ
Output signal	0 ... 10 V
Load resistance	≥ 2 kΩ
Accuracy at Tu=23 °C	± 0.2% of FS
Temperature coefficient	≤ 250 ppm / K of FS
Response time	≤ 40 µs (typ. 30 µs)
Cut-off frequency (-3 dB)	≥ 15 kHz (typ. 20 kHz)

General

Voltage supply	24 Vdc ±25% (18 ... 30 Vdc)
Power consumption	< 1.3 W at I _{out} = 5 mA
Current carrying capacity of cross-connection	≤ 2 A
Operating temperature	0 °C ... +55 °C
Storage temperature	-20 °C ... +85 °C
Dimensions L / H / W mm	92.4 / 112.5 / 17.5
Approvals	CE, UL, CSA

Coordination of insulation according to EN 50178, 04/98

Rated voltage	300 V
Rated surge voltage	4 kV
Oversurge category	III
Contamination class	2
Clearance and creepage distance	≥ 3 mm
Coupling capacity	
Input / output to supply	1 nF
Isolation voltage, voltage strength	4 kV _{eff} / 1 min
Input/output to mounting rail	
Standards/specifications	EN 50178
EMC standards	EN 50081, EN 50082, EN 55011
Dimensions and accessories see	Page 298 + 308

VVC HF

0 ... 10 V / 0 ... 10 V



Approvals:





VVC HF

-10 ... +10 V / -10 ... +10 V



Approvals:

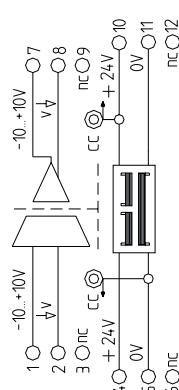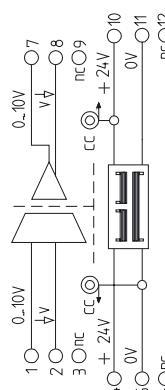

*Tu = 23 °C single module

DC/DC Signal Conditioners (Configurable)


WAVEANALOG PRO DC/DC

- universally adjustable via DIP switch
- adjustment help via Internet
- 3-way-isolation
- voltage supply from 20 - 230 V ac/dc
- low power loss
- adjustable transmission frequency
- indication LED

Approvals:



Block diagram

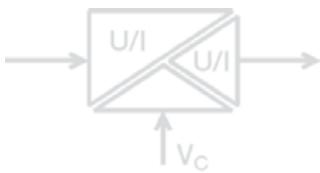

Ordering data

Screw connection

Tension clamp connection

Input/output

Technical data*

Input (adjustable)

Voltage uni-/bipolar adjustable

Voltage calibrated ranges

Current uni-/bipolar adjustable

Current calibrated ranges

Input resistance

at current input range < 5 mA / > 5 mA

at voltage input

Input capacity

at current input

Voltage input range < 500 mV / > 500 mV

Overload capacity

at current input range < 5 mA / > 5 mA

Voltage input range < 500 mV / > 500 mV

Output (adjustable)

Voltage uni-/bipolar adjustable

Voltage calibrated ranges

Current uni-/bipolar adjustable

Current calibrated ranges

Offset

Load

at output current

at output voltage

Offset

Residual ripple

Adjustment zero pot.

Adjustment span pot.

Gain error

Temperature coefficient

Cut-off frequency

General

Voltage supply

Power consumption

Frequency range

Operating temperature

Storage temperature

Factory setting

Dimensions L/H/B mm

Weight

Approvals

Coordination of insulation according to EN 50178, 04/98

Rated voltage

Rated surge voltage

Oversupply category

Contamination class

Test voltage

Standards/specifications

EMC standards

PRO DC/DC



Adjustment help WAVETool

The service tool enables quick and uncomplicated configuration of WAVEANALOG PRO. Download from Internet: <http://www.weidmueller.de> → Products → Downloads (see page 192)

Switch position/setting options

Input	Switch							
	S1				S2			
Input range	1	2	3	4	1	2	3	4
0 ... ±60 mV								■
0 ... ±100 mV	■							■
0 ... ±150 mV		■						■
0 ... ±300 mV	■	■						■
0 ... ±500 mV			■					■
0 ... ±1 V	■	■						■
0 ... ±5 V		■	■					■
0 ... ±10 V	■	■	■					■
0 ... ±100 V				■				■
0 ... ~0.3 mA	■	■						■
0 ... ±1 mA		■	■					■
0 ... ±5 mA	■	■	■					■
0 ... ±10 mA		■	■					■
0 ... ±20 mA	■	■	■					■
0 ... ±50 mA		■	■	■				■
0 ... ±20 mA*	■	■	■	■				■

*Offset conversion not calibrated

Output	Switch S2							
	calibrated ranges				Span pot. activated: input range x 0.33 ... x 3.30			

Output	Switch							
	S1			S3			4	
Output range	5	6	7	1	2	3	4	
0 ... ±10 V								■
2 ... 10 V		■						■
0 ... ±5 V			■	■	■	■		■
1 ... 5 V	■	■						■
0 ... ±20 mA				■				
4 ... 20 mA	■	■						

Offset	Switch S1							
	S1			S2			4	
(in % of output voltage)	8	9	10	5	6	7	1	2
0 %								■
-100 %	■							■
-50 %		■						■
+50 %	■	■						■
+100 %			■					■

Zero pot. activated: additional ±25 %

Output	Switch S3							
	Bandwidth 10 kHz				Bandwidth 10 Hz			
Set range can be documented on side of housing.								

■ = on

= off

Dimensions and accessories see page 298 + 308

*Tu = 23 °C single module

RTD Signal Conditioners


WAVEANALOG RTD

- 2-wire technology
- configurable temperature range
-200 °C ... +800 °C
- Configurable output current range
0 ... 20 mA / 4 ... 20 mA
- cross-connectable voltage supply
via cross-connectors

Approvals:



Block diagram

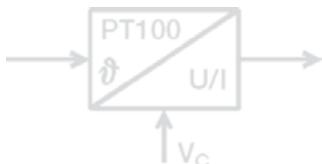

PT100/2

0(4) ... 20 mA



PT100/2

0 ... 10 V



Switch position/setting options


Tmin	1	2	3	Span	4	5	6
0 C°	■	■	■	40 ... 50 °C	■	■	■
-10 C°	■	■		50 ... 75 °C	■	■	
-20 C°	■	■		75 ... 110 °C	■	■	
-40 C°	■			110 ... 165 °C	■		
-60 C°		■		165 ... 245 °C	■	■	
-80 C°		■		245 ... 360 °C		■	
-100 C°		■		360 ... 540 °C		■	
-200 C°				540 ... 800 °C			

Output¹⁾

Range	7
0 ... 20 mA	
4 ... 20 mA	■

¹⁾ only modules with current output

■ = on
= off

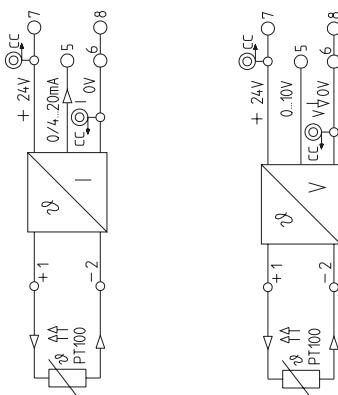

Ordering data

Screw connection
Tension clamp connection
Input/output

Type

WTS4 PT100/2 C **8432210000***
WTZ4 PT100/2 C **8432220000***
PT100/2 / 0(4) ... 20 mA

Type

WTS4 PT100/2 V **8432180000***
WTZ4 PT100/2 V **8432190000***
PT100/2 / 0 ... 10 V

Technical data***

Input signal

Temperature range
Supply current
Conductor resistance

PT100/2-wire

-200 ... +800 °C
1.45 mA

PT100/2-wire

-200 ... +800 °C
1.45 mA

Output signal

Load resistance
Accuracy at Tu=23 °C
Temperature coefficient

0(4) ... 20 mA

≤ 500 Ω
± 0.5% of measurement range

0 ... 10 V

≥ 1 kΩ
± 0.5% of measurement range

Measurement range ≥ 200 K
100 K ≤ measurement range < 200 K

≤ 200 ppm / °C
(typ. 80 ppm / °C)

≤ 200 ppm / °C
(typ. 80 ppm / °C)

40 K ≤ measurement range < 100 K

≤ 250 ppm / °C
(typ. 100 ppm / °C)

≤ 250 ppm / °C
(typ. 100 ppm / °C)

General

Voltage supply

24 Vdc ±20%

24 Vdc ±20%

Power consumption

(19.2 ... 28.8 Vdc)

(19.2 ... 28.8 Vdc)

Current carrying capacity of cross-connection

< 48 mA at I_{out} = 20 mA

< 38 mA at I_{out} = 10 mA

Operating temperature

≤ 2 A

≤ 2 A

Storage temperature

0 °C ... +55 °C

0 °C ... +55 °C

Standards/specifications

EN 50178, IEC 751

EN 50178, IEC 751

EMC standards

EN 50081, EN 50082,

EN 50081, EN 50082,

Dimensions L / H / W mm

EN 55011

EN 55011

Approvals

92.4 / 112.5 / 12.5

92.4 / 112.5 / 12.5

Dimensions and accessories see

CE, UL, CSA

CE, UL, CSA

* without balancing

Page 298 + 308

Page 298 + 308

** Tu = 23 °C single module

Preconfigured modules

	Input	0 ... 20 mA	4 ... 20 mA	0 ... 10 V
Screw connection	0 ... 100 °C	8432210001	8432210011	8432180001
	special balancing	8432219999**	8432219999**	8432189999**
Tension clamp connection	0 ... 100 °C	8432220001	8432220011	8432190001
	special balancing	8432229999**	8432229999**	8432199999**

** You must indicate the temperature range when ordering

Please indicate additional output signal of current output

Aids

- Voltage supply 24 Vdc, 50 mA
- Simulator for PT 100 or precision-resistance-decade
- Ampere-/voltmeter which can be calibrated to an accuracy of >0.1 % of the end value.

RTD Signal Conditioners


WAVEANALOG RTD

- 3-wire technology
- configurable temperature range
-200 °C ... +800 °C
- configurable output current range
0 ... 20 mA / 4 ... 20 mA
- cross-connectable voltage supply
via cross-connectors

Approvals:



Block diagram

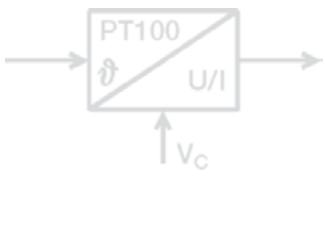

Ordering data

Screw connection	Type	Cat. No.
WTS4 PT100/3 C	8432150000*	
WTZ4 PT100/3 C	8432160000*	

Input/output	PT100/3 / 0(4) ... 20 mA
--------------	--------------------------

Technical data***

Input signal	PT100/3-wire
Temperature range	-200 ... +800 °C
Supply current	1.45 mA
Conductor resistance	≤ 50 Ω
Output signal	PT100/3-wire
Load resistance	1.45 mA
Accuracy at Tu=23 °C	± 0.5% of measurement range
Temperature coefficient	± 0.5% of measurement range
Measurement range ≥ 200 K	≤ 200 ppm / °C (typ. 80 ppm / °C)
100 K ≤ measurement range < 200 K	≤ 250 ppm / °C (typ. 100 ppm / °C)
40 K ≤ measurement range < 100 K	≤ 500 ppm / °C (typ. 200 ppm / °C)

General	PT100/3-wire
Voltage supply	-200 ... +800 °C
Power consumption	1.45 mA
Current carrying capacity of cross-connection	≤ 50 Ω
Operating temperature	0 ... 10 V
Storage temperature	≥ 1 kΩ

Standards/specifications	EN 50178, IEC 751
EMC standards	EN 50081, EN 50082, EN 55011
Dimensions L / H / W mm	92.4 / 112.5 / 12.5

Approvals	CE, UL, CSA
Dimensions and accessories see	Page 298 + 308

* without balancing

** Tu = 23 °C single module

*** Tu = 23 °C single module

**** You must indicate the temperature range when ordering

Please indicate additional output signal of current output

PT100/3

0(4) ... 20 mA



PT100/3

0 ... 10 V



Switch position/setting options



Tmin	1	2	3	Span	4	5	6
0 °C	■	■	■	40 ... 50 °C	■	■	■
-10 °C	■	■		50 ... 75 °C	■	■	
-20 °C	■	■		75 ... 110 °C	■	■	
-40 °C	■			110 ... 165 °C	■		
-60 °C		■		165 ... 245 °C	■		
-80 °C		■		245 ... 360 °C	■		
-100 °C		■		360 ... 540 °C	■		
-200 °C				540 ... 800 °C			

Output¹⁾

Range	7
0 ... 20 mA	
4 ... 20 mA	■

¹⁾ only modules with current output

■ = on
= off

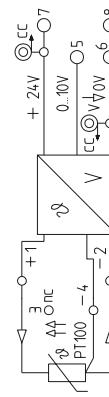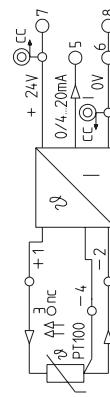

RTD Signal Conditioners


WAVEANALOG RTD

- 2-, 3- and 4-wire technology
- configurable temperature range -200 °C ... +800 °C
- configurable output current range 0 ... 20 mA / 4 ... 20 mA
- cross-connectable voltage supply via cross-connectors

Approvals:



Block diagram

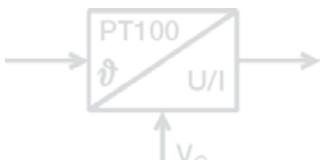

PT100/4

0(4) ... 20 mA



PT100/4

0 ... 10 V



Switch position/setting options


Tmin	1	2	3	Span	4	5	6
0 °C	■	■	■	40 ... 50 °C	■	■	■
-10 °C	■	■		50 ... 75 °C	■	■	
-20 °C	■	■		75 ... 110 °C	■	■	
-40 °C	■			110 ... 165 °C	■		
-60 °C		■		165 ... 245 °C	■	■	
-80 °C		■		245 ... 360 °C		■	
-100 °C		■		360 ... 540 °C		■	
-200 °C				540 ... 800 °C			

Output¹⁾

Range	7	8	9	10
0 ... 20 mA		■	■	■
4 ... 20 mA	■		■	■

PT 100

¹⁾ only modules with current output ■ = on
= off

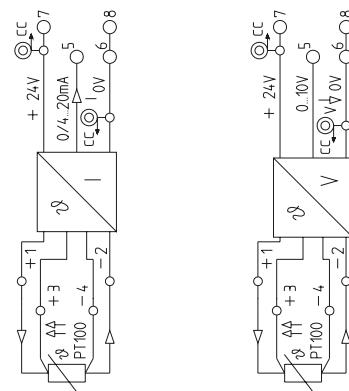

Ordering data

Screw connection

Type

WTS4 PT100/4 C **8432270000***

Type

WTS4 PT100/4 V **432240000***

Tension clamp connection

WTZ4 PT100/4 C **8432280000***

WTZ4 PT100/4 V **432250000***

Input/output

PT100/4 / 0(4) ... 20 mA

PT100/4 / 0 ... 10 V

Technical data**

Input signal

Temperature range

PT100/4-wire

-200 ... +800 °C

Supply current

1.45 mA

Conductor resistance

≤ 50 Ω (3- & 4-wire)

Output signal

0(4) ... 20 mA

Load resistance

≤ 500 Ω

Accuracy at Tu=23 °C

± 0.1% of measurement range

100 K ≤ measurement range < 600 K

± 0.1 K

Measurement range ≤ 100 K

± 0.2% of measurement range

Measurement range ≥ 600 K

± 0.1% of measurement range

Temperature coefficient

± 0.1 K

Measurement range ≥ 200 K

± 0.2% of measurement range

100 K ≤ measurement range < 200 K

± 0.1 K

40 K ≤ measurement range < 100 K

± 0.2% of measurement range

General

Voltage supply

24 Vdc ±20%

(19.2 ... 28.8 Vdc)

Power consumption

< 48 mA at I_{out} = 20 mA

Current carrying capacity of cross-connection

≤ 2 A

Operating temperature

0 °C ... +55 °C

Storage temperature

-20 °C ... +85 °C

Standards/specifications

EN 50178, IEC 751

EMC standards

EN 50081, EN 50082,

Dimensions L / H / W mm

EN 55011

Approvals

92.4 / 112.5 / 12.5

Dimensions and accessories see

CE, UL, CSA

Page 298 + 308

* without balancing

Page 298 + 308

** Tu = 23 °C single module

Preconfigured modules

Output

	Input	0 ... 20 mA	4 ... 20 mA	0 ... 10 V
Screw connection	0 ... 100 °C	8432270001	8432270011	8432240001
	special balancing	8432279999**		8432249999**
Tension clamp connection	0 ... 100 °C	8432280001	8432280011	8432250001
	special balancing	8432289999**		8432259999**

** Please indicate the temperature range (2-, 3- or 4-wire).

Please indicate additional output signal of current output

Aids

- Voltage supply 24 Vdc, 50 mA
- Simulator for PT 100 or precision-resistance-decade
- Ampere-/voltmeter which can be calibrated to an accuracy of >0.1 % of the end value.

Thermo-Signal Conditioners


WAVEANALOG Thermo

- thermocouples K, J, T, E, N, R, S, B configurable
- temperature range -200 °C ... +1820 °C
- no adjustment necessary
- cold junction compensation
- configurable output signal
- cross-connectable voltage supply via cross-connectors

Approvals:



Block diagram



Ordering data

Screw connection

Tension clamp connection

Input/output

Technical data*

Input signal

Types

K-200 ... +1372 °C
J-200 ... +1200 °C
T-200 ... +400 °C
E-200 ... +1000 °C
N-200 ... +1300 °C
R-50 ... +1760 °C
S-50 ... +1760 °C
B+50 ... +1820 °C

Output signal

Load resistance

Output signal

Load resistance

Output signal

Accuracy at Tu = 23 °C

Type K	-200°C ... -150°C ± (5K + 0.1% of set range)
	-150°C ... 1200°C ± (3K + 0.1% of set range)
	1200°C ... 1372°C ± (4K + 0.1% of set range)
Type J	-200°C ... -150°C ± (4K + 0.1% of set range)
	-150°C ... 1200°C ± (3K + 0.1% of set range)
Type T	-200°C ... -150°C ± (5K + 0.1% of set range)
	-150°C ... 400°C ± (3K + 0.1% of set range)
Type E	-200°C ... -150°C ± (4K + 0.1% of set range)
	-150°C ... 1000°C ± (3K + 0.1% of set range)
Type N	-200°C ... -150°C ± (6K + 0.1% of set range)
	-150°C ... 1300°C ± (3K + 0.1% of set range)
Type R	-50°C ... 200°C ± (10K + 0.1% of set range)
	200°C ... 1760°C ± (6K + 0.1% of set range)
Type S	-50°C ... 200°C ± (10K + 0.1% of set range)
	200°C ... 1760°C ± (6K + 0.1% of set range)
Type B	50°C ... 250°C ± (25K + 0.1% of set range)
	250°C ... 500°C ± (10K + 0.1% of set range)
	500°C ... 1820°C ± (6K + 0.1% of set range)

Temperature coefficient

Response time without filter

Response time with filter

General

Voltage supply

Power consumption

Current carrying capacity of cross-connection

Open circuit recognition

Operating temperature

Storage temperature

Standards/specifications

EMC standards

Dimensions L / H / W mm

Approvals

Dimensions and accessories see

* Tu = 23 °C single module

Thermo Select

°C / 0 ... 20 mA,
4 ... 20 mA, 0 ... 10 V



Switch position/setting options

SW 1

Type	1	2	3
K	■	■	■
J	■	■	■
T	■	■	■
E		■	
N	■	■	
R		■	
S	■		
B			

SW 1

Tmin	4	5	6	7
0 °C	■	■	■	
-10 °C	■	■	■	
-20 °C	■	■	■	
-30 °C	■	■		
-40 °C	■	■	■	
-50 °C	■	■		
-100 °C	■	■		
-150 °C	■	■		
-200 °C	■	■		
+50 °C	■	■		
+100 °C	■	■		
+150 °C	■	■		
+200 °C	■	■		
+250 °C	■	■		
+500 °C	■	■		

SW 2

Output	6	7
0 ... 10 V	■	
0 ... 20 mA		■
4 ... 20 mA	■	

Filter 8

off	
on	■

■ = on

= off

Thermo Signal Isolating Transformers (Configurable)


WAVEANALOG PRO Thermo

- 3-way-isolation
- thermocouples
 - K, J, T, E, N, R, S, B configurable
- temperature range
 - 200 °C ... +1820 °C
- no adjustment necessary
- cold junction compensation
- configurable output signal
- cross-connectable voltage supply via cross-connectors

Approvals:



Block diagram

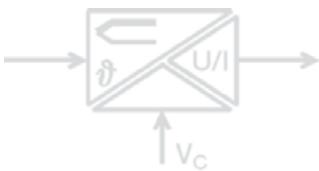

Ordering data

Screw connection	Cat. No.
WAZ5 PRO Thermo	8560720000

Tension clamp connection

Input/output

Technical data*

Input (adjustable)

Accuracy at $T_U = 23^\circ\text{C}$

Type	Cat. No.
WAS5 PRO Thermo	8560720000
WAZ5 PRO Thermo	8560730000


PRO Thermo



Adjustment help

WAVETOOL

This service tool enables quick and uncomplicated configuration of WAVEANALOG PRO. Download from the Internet:
http://www.weidmueller.de
→ Products → Downloads
(see page 192)

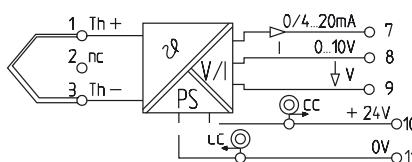

Selection of the thermocoupler

Type	1	2	3
K	■	■	■
J		■	■
T	■		■
E			■
N	■	■	
R		■	
S	■		
B			

Selection of minimum temperature

	SW1	4	5	6	7
0°C	■	■	■	■	
-10°C		■	■	■	
-20°C	■		■	■	
-30°C			■	■	
-40°C	■		■	■	
-50°C		■	■	■	
-100°C	■		■	■	
-150°C		■		■	
-200°C		■	■	■	
+50°C		■		■	
+100°C		■		■	
+150°C			■		
+200°C		■			
+250°C			■		
500°C				■	
Special range					

Selection of temperature span

Span	1	2	3	4	5
100°C	■	■	■	■	
150°C	■	■	■	■	
200°C	■	■	■	■	
250°C	■	■	■		
300°C	■	■	■		
350°C	■	■	■		
400°C	■	■	■		
450°C	■	■			
500°C	■	■	■		
550°C	■	■	■		
600°C	■	■	■		
650°C	■	■			
700°C	■	■	■		
750°C	■	■			
800°C	■		■		
850°C	■				
900°C	■	■	■		
950°C	■	■	■		
1000°C	■	■	■		
1050°C	■	■			
1100°C	■	■	■		
1150°C	■		■		
1200°C	■				
1250°C	■				
1300°C		■	■	■	
1350°C		■		■	
1400°C		■		■	
1450°C		■			
1500°C			■	■	
1600°C			■		
1700°C			■		
1800°C					

Selection of output

Output	SW2	6	7
0...10V			■
0...20mA			
4...20mA			■

Switching on the manual fine adjustment

SW1	man. adjust.	8
off		
on		■

Switching on the filter function

Filter	SW2
off	
on	■

Coordination of insulation acc. to DIN EN 50178, 04/98

Rated voltage	300 V
Surge voltage	4 kV
Oversupply category	III
Contamination class	2
Clearance & creep. distance	3 mm
Test voltage	2 kV _{eff}

General

Supply voltage:	18 Vdc ... 24 Vdc ... 30 Vdc
Power consumption:	800 mV ... 850 mW ... 950 mW @ I output = 20 mA
Current carrying capacity of cross-connection:	≤ 2 A
Operating temperature	0 °C ... +55 °C
Storage temperature	-20 ... +85 °C
Standards/specifications	EN 50178, IEC751
EMC standards	EN 50081, EN50082, EN55011
Factory setting	Type K 0 ... 1000 °C / 4 ... 20 mA; no filter;
Dimensions L/H/W mm	No manual fine adjustment 92.4 / 112.5 / 17.5
Weight	100 g
Approvals	CE, cUL, GL
Dimensions and accessories see	Page 298 + 308

■ = on
= off

* $T_U = 23^\circ\text{C}$ single module


Adjustment Help WAVEtool

The adjustment help – **WAVEtool** – enables quick and uncomplicated configuration of **WAVEANALOG PRO DC**, **WAVEANALOG PRT RTD**, **WAVEANALOG PRO THERMO**.


Menu for selecting the functions



For configuring the current/voltage isolating transformer

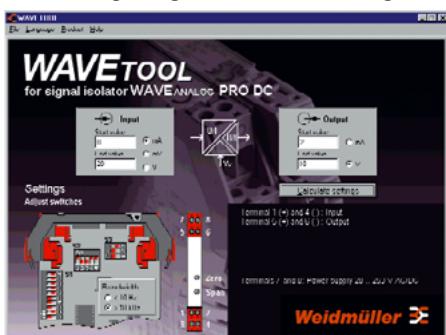

For configuring the temperature signal isolating transformer

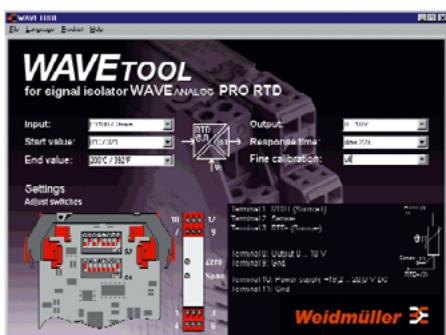


For configuring the thermo signal isolating transformer



Once the required input and output parameters have been entered, the program determines the correct switch setting and gives instructions for the electrical connection of the module. Where necessary, it also determines and displays the required calibration values. The entire process can be printed out or saved as a PDF file for installation documentation purposes.

Download from the Internet:

<http://www.weidmueller.de> ⇒ Products ⇒ Download

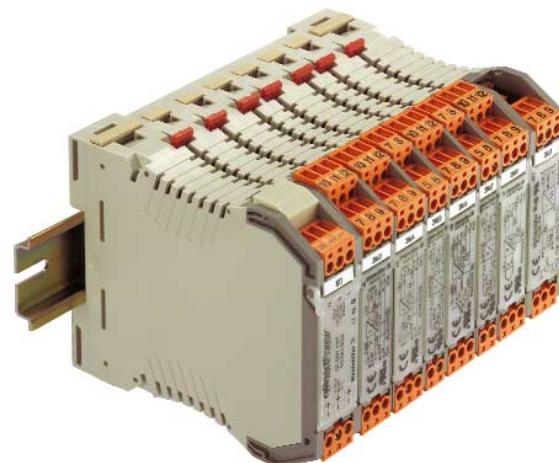

Printout of protocol for the documentation

<p>WAVEtool for signal isolator WAVEANALOG PRO RTD</p> <p>Weidmüller</p>	<p>Weidmüller</p>
<p>Note: Weidmüller Interface GmbH</p> <p>Weidmüller Interface GmbH & Co. P.O. Box 3030 D-32720 Detmold T: +49-05231-14-2083 F: +49-05231-14-2083</p> <p>Date: 02.04.02</p>	
<p>Input: Type: PT100 / 4-wire Start value: 0°C / 32°F End value: 100°C / 212°F</p>	
<p>Output: Output voltage: 0 .. 10 V Response time: slow 2,2s Fine calibration: off</p>	
<p>Settings: Adjust switches</p>	
<p>Terminal 1: RTD+ (Source+) Terminal 2: Sense- Terminal 3: RTD- (Source-) Terminal 4: Sense+</p> <p>Terminal 8: Output 0 .. 10 V Terminal 9: Gnd</p> <p>Terminal 10: Power supply +18 .. 30 V DC Terminal 11: Gnd</p>	

Current monitoring

Monitoring flows of currents enables a constant control of individual devices and installation components.

Discrepancies or disruptions arising in the electrical circuit can easily be evaluated as breakdowns. Targeted rectifying procedures can be taken.

The **WAVECONTROL** range of products convert sinusoidal/non-sinusoidal AC/DC currents up to 60 A to standard analogue signals. The measurement processes are based on 2 basic principles.

One principle is alternating currents up to 10 A ac and 50/60 Hz are measured using the **transformer process**.

The module is looped directly into the measurement circuit.

A **Hall-effect** element comes in to operation at 10 A ac/dc.

The potential-free wire is inserted through the module, allowing currents up to 60 A ac/dc to be measured. Quite often, there are high-frequency parts of signals on the wire to be measured. In order to be able to take these parts of the signals into consideration, so-called **TRMS converters** (TRUE Root Mean Square) are connected to the Hall sensors. This enables measurements up to 2 kHz, independent of the shape of the curve.

Standard signals (0...20, 4...20 mA, 4...20 A current loop supply, 0...10 V) or a switch output are on offer.

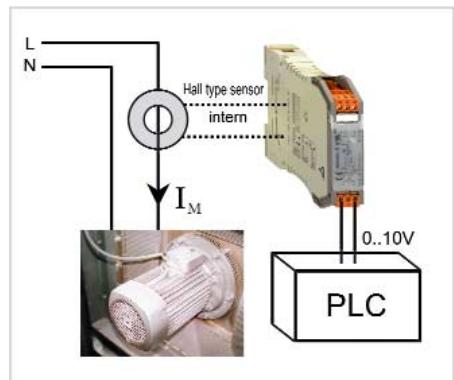



Fig.: Monitoring motor currents



Monitoring a motor in a cooling system




Monitoring a pump in a sewage treatment plant

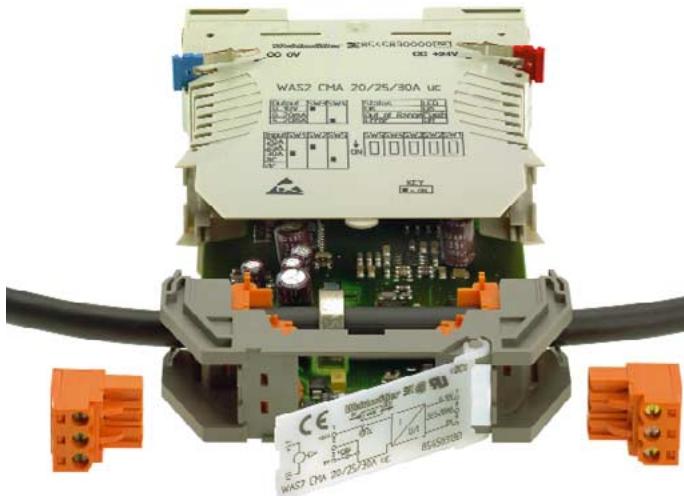

- Less wiring costs thanks to cross-connections
- Very good marking options
- Fast commissioning – pluggable replacement PCBs
- Connection technology – screw or tension clamp via socket block
- Tool-free mounting
- Coding elements in the connections – false plugging not possible

- Galvanically isolated measurement circuit
- Measurements of direct and alternating currents possible
- TRMS versions for measuring non sinusoidal signals
- Measurement range switch without calibration
- Relay version with selectable hysteresis
- Selectable working and closed-circuit current process for defined statuses (optional as normally open or normally closed contact)
- Error indication via LED indication

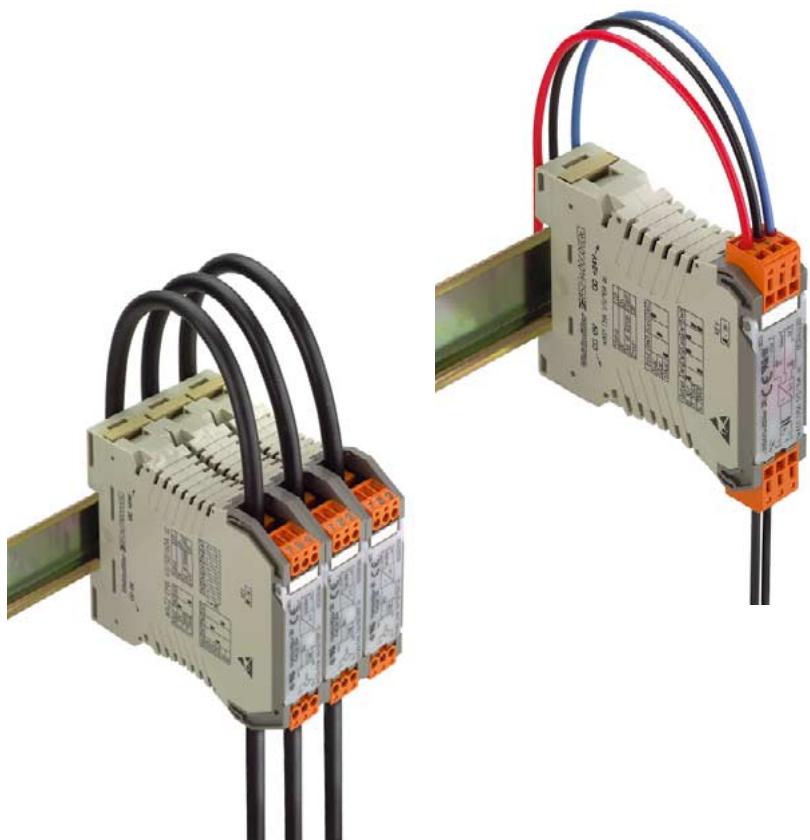

Current Monitoring

WAVECONTROL

- current ranges adjustable via DIP switch
- cross-connectable voltage supply via cross-connectors
- selectable hysteresis
- selectable working and closed-circuit current principle

WAS2 CMR WAZ2 CMR

1/5/10 A ac
selectable with relay output



WAS2 CMR WAZ2 CMR



20/40/60A ac
selectable with relay output



Approvals:



Block diagram

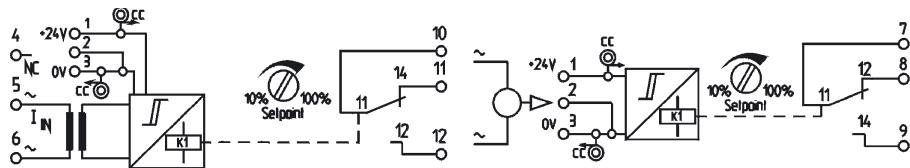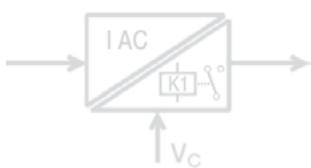

Ordering data

Screw connection
Tension clamp connection

Technical data*

Input

	Type	Cat. No.	Qty.
Screw connection	WAS2 CMR 1/5/10A ac	8516560000	1
Tension clamp connection	WAZ2 CMR 1/5/10A ac	8516570000	1

Max. measuring circuit

Max. measuring circuit	100A for 1s	dependent on wire cross-section
------------------------	-------------	---------------------------------

Output

Contact set	1 changeover contact	1 changeover contact
Min. switching voltage	6Vdc/6Vac	6Vdc/6Vac
Max. switching voltage	60Vdc/250Vac	60Vdc/250Vac
Continuous current AC	3A	3A
Continuous current DC	0.7A	0.7A
Max. switching current	7A	7A
Min. switching current	100mA	100mA
Status LED	green LED	green LED
Threshold	10% ... 100% adjustable via front potentiometer	10% ... 100% adjustable via front potentiometer
Hysteresis	approx. 5% or approx. 10% selectable from set threshold	approx. 5% or approx. 10% selectable from set threshold
Temperature coefficient	≤ 800 ppm/K	≤ 250 ppm/K
Response time (10 ... 90%)	typ. 700 ms	typ. 700 ms
Working/closed-circuit current principle	selectable	selectable

Coordination of insulation acc. to DIN EN 50178, 04/98

Rated voltage	300V	300V
Surge voltage	4kV	4kV
Oversupply category	III	III
Contamination class	2	2
Clearance and creepage distance	≥ 3 mm	≥ 3 mm
Test voltage	4kV eff	4kV eff

General

Supply	21.6Vdc...24Vdc...26.4Vdc	21.6Vdc...24Vdc...26.4Vdc
Supply voltage	8.3 mA (relay not switched)	23 mA (relay not switched)
Power consumption at rated voltage	24 mA (relay switched)	47 mA (relay switched)
Reverse polarity protection	yes	yes
Current carrying capacity of the cross-connection	≤ 2 A	≤ 2 A
Operating temperature range	0 ... 50°C	0 ... 50°C
Storage/transport	-20 ... +70°C	-20 ... +70°C
Factory setting	Input range: 5A ac; hysteresis 10%, working current principle	Input range: 40A ac; hysteresis 10% working current principle
Dimensions L/H/B (mm)	92.4/112.4/22.5	92.4/112.4/22.5
Weight	150g	150g
Approvals	CE, cUL	CE, cUL
Dimensions and accessories see	Page 298 + 308	Page 298 + 308

* $T_u = 23^\circ\text{C}$ single module

Current Monitoring

WAVECONTROL

- input and output range adjustable via DIP switch
- no calibration required
- cross-connectable voltage supply via cross-connectors

WAS1 CMA WAZ1 CMA

1/5/10A ac selectable with analogue output
0...20 mA / 4...20 mA
0...10 V



WAS1 LP CMA WAZ1 LP CMA


1/5/10 A ac selectable with analogue output
4...20 mA loop powered



Approvals:



Block diagram

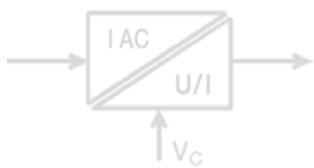

Ordering data

Screw connection
Tension clamp connection

Technical data*

Input

Input current	1 A ac/5 A ac/10 A ac selectable (without additional adjustment)
Input frequency	50 Hz/60 Hz
Accuracy	0.5% FSR
Measuring principle	transformer coupled
Connection type	Screw or tension clamp connection
Measurement circuit voltage	250 Vac
Max. measuring circuit	100 A for 1s

Output

Current/voltage selectable	0 ... 10 V 0 ... 20 mA 4 ... 20 mA
	0 ... 10 V max. 0.05 V

Output voltage

Offset voltage	approx. 13 V and 24 mA
Load resistance	4 ... 20 mA
Output signal limit	0/4 ... 20 mA
Output current	max. 100 μ A
Offset current	\leq 100 μ A
Load resistance	\leq 600 Ω

Status LED

Temperature coefficient	ON-> OK; blinks -> signal out of range; OFF -> Error
Response time (10 ... 90%)	\leq 200 ppm/K typ. 700 ms

Coordination of insulation acc. to DIN EN 50178, 04/98



(safe separation)

Rated voltage	300V
Surge voltage	6kV
Oversupply category	III
Contamination class	2
Clearance and creepage distance	\geq 5.5 mm
Test voltage	4kV eff

General

Supply	21.6 Vdc...24 Vdc...26.4 Vdc
Supply voltage	40 mA at I_{out} = 20 mA
Power consumption at rated voltage	yes
Reverse polarity protection	yes
Operating temperature range	0 ... 50°C
Storage/transport	-20 ... +70°C
Factory setting	0 ... 5A ac; 4 ... 20mA
Dimensions L/H/W (mm)	72/92.4/22.5
Weight	150g
Approvals	CE, cUL
Dimensions and accessories see	Page 298 + 308

* T_U = 23 °C single module

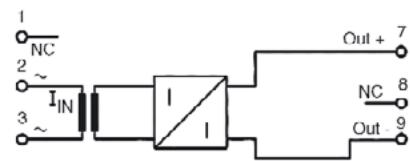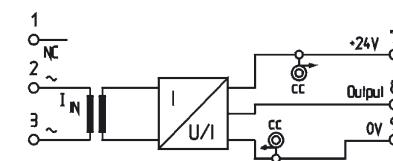

Type	Cat. No.	Qty.
WAS1 CMA 1/5/10A ac	8523400000	1
WAZ1 CMA 1/5/10A ac	8523410000	1

Type	Cat. No.	Qty.
WAS1 LP CMA 1/5/10A ac	8528650000	1
WAZ1 LP CMA 1/5/10A ac	8528660000	1

Current Monitoring

WAVECONTROL

- input and output range adjustable via DIP switch
- no calibration required
- true TRMS value measurements
- hall sensor measurement method

WAS2 CMA WAZ2 CMA

5/10A ac/dc selectable with analogue output
0 ... 20 mA/
4 ... 20 mA/
0 ... 10 V



WAS2 CMA WAZ2 CMA


20/25/30A ac/dc selectable with analogue output
0 ... 20 mA/
4 ... 20 mA/
0 ... 10 V





Approvals:



Block diagram

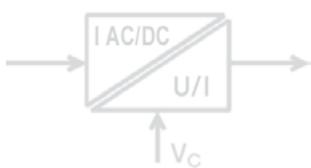

Input / Output configurable

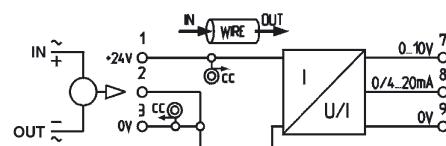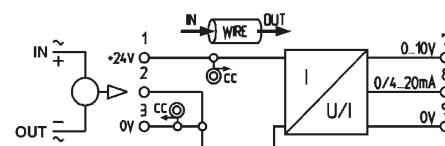

Ordering data

Screw connection

Tension clamp connection

Technical data*

Input

Input current

Input frequency

Accuracy

Measuring principle

Connection type

Pass through diameter

Measurement circuit voltage

Max. measuring circuit

Output

Current/voltage selectable

Output voltage

Offset voltage

Load resistance

Output signal limit

Output current

Offset current

Load resistance

Status LED

Temperature coefficient

Response time (10 ... 90%)

Coordination of insulation acc. to DIN EN 50178, 04/98

(safe separation)

Rated voltage

Surge voltage

Oversupply category

Contamination class

Clearance and creepage distance

Test voltage

General

Supply

Supply voltage

Power consumption at rated voltage

Reverse polarity protection

Operating temperature range

Storage/transport

Factory setting

Dimensions L/H/B (mm)

Weight

Approvals

Dimensions and accessories see

* Tu = 23 °C single module

Type WAS2 CMA 5/10A uc Cat. No. 8526610000 Qty. 1

Type WAZ2 CMA 5/10A uc Cat. No. 8526620000 Qty. 1

Type WAS2 CMA 20/25/30A uc Cat. No. 8545830000 Qty. 1

Type WAZ2 CMA 20/25/30A uc Cat. No. 8545840000 Qty. 1

20/25/30 A ac selectable (without additional adjustment)

0 Hz - 2 kHz (True RMS to DC Converter)

1% (0 Hz - 1 kHz) Crest factor 3 FSR

2% (0 Hz - 2 kHz) Crest factor 5 FSR

Contact-free current monitoring using Hall sensor

Push-through connection

8 mm

400 Vac, higher voltages dependent on wire insulation

dependent on wire cross-section

0 ... 10 V

0 ... 20 mA

4 ... 20 mA

0 ... 10 V

max. 0.08 V

$\geq 1 \text{ k}\Omega$

approx. 13 V and. 24 mA

0/4 ... 20 mA

max. 150 μA

$\leq 600 \Omega$

green LED

ON-> OK; blinks -> signal out of range; OFF -> Error

$\leq 650 \text{ ppm/K}$

typ. 700 ms

300 V

6 KV

III

2

$\geq 5.5 \text{ mm}$

4 kV eff

21.6 Vdc...24 Vdc...26.4 Vdc

50 mA at $I_{out} = 20 \text{ mA}$

yes

0 ... 50 °C

-20 ... +70 °C

0 ... 25 A uc; 4 ... 20mA

92.4/112.4/22.5

150g

CE, cUL

Page 298 + 308

Current Monitoring


WAVECONTROL

- input and output range adjustable via DIP switch
- no calibration required
- cross-connectable voltage supply via cross-connectors
- true TRMS value measurements
- hall sensor measurement method

Approvals:



Block diagram

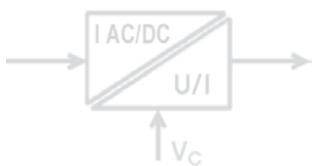

Ordering data

Screw connection
Tension clamp connection

Technical data*

Input

Input current	40/50/60A uc selectable (without additional adjustment)
Input frequency	0 Hz - 2 kHz (True RMS to DC Converter)
Accuracy	1% (0Hz - 1KHz) Crest factor 3 FSR 2% (0Hz - 2KHz) Crest factor 5 FSR
Measuring principle	Contact-free current monitoring using Hall sensor
Connection type	Push-through connection
Pass through diameter	8 mm
Measurement circuit voltage	400 Vac, higher voltages dependent on wire insulation

Max. measuring circuit

Output

Current/voltage selectable

Output voltage

Offset voltage

Load resistance

Output signal limit

Output current

Offset current

Load resistance

Status LED

Temperature coefficient

Response time (10 ... 90%)

Coordination of insulation acc. to DIN EN 50178, 04/98

(safe separation)

Rated voltage	300 V
Surge voltage	6 kV
Overvoltage category	III
Contamination class	2
Clearance and creepage distance	≥ 5.5 mm
Test voltage	4 kV eff

General

Supply

Supply voltage

Power consumption at rated voltage

Reverse polarity protection

Operating temperature range

Storage/transport

Factory setting

Dimensions L/H/W (mm)

Weight


Approvals

Dimensions and accessories see

* Tu = 23 °C single module

WAS2 CMA WAZ2 CMA

40/50/60A ac/dc
selectable with
analogue output
0 ... 20 mA/
4 ... 20 mA/
0 ... 10 V

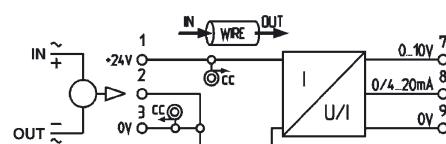

Current Monitoring

- For AC/DC
- With and without adjustable switching threshold
- Opto-coupler output

SMSI DC O

With adjustable switching threshold

Up to 50 mA



Up to 250 mA



This series is particularly suitable for monitoring small currents from 50 mA to 5 A.

The adjustable switching threshold activates optionally one relay or opto-coupler output each.

Block diagram/ timing diagram

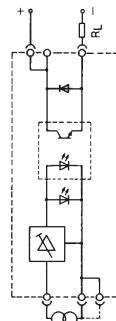

Ordering data

Type Cat. No.
SMSI 0.05 DC O 1157160000

Type Cat. No.
SMSI 0.25 DC O 1156360000

Technical data

Measurement circuit voltage	10 V... 250 Vdc	10 V... 250 Vdc
Max. permissible current in measurement circuit	70 mA	350 mA
Rated consumption – (W)	200 mW	750 mW
Rated consumption ~ (VA)	–	–
Adjustable switching threshold	1 mA...50 mA	40 mA...250 mA
Hysteresis between turn-on and turn-off point	0.5 % (50 mA)...5 % (1 mA)	2% (250 mA)...10% (40 mA)
Activation time t_A	< 10 ms	< 3 ms
Reaction time t_R	< 10 ms	< 3 ms
Voltage drop at input	< 4 V	< 3 V
Output voltage	5 V...50 Vdc	5 V...50 V-
Max. continuous output current	100 mA	100 mA
Saturation voltage	≤ 1.3 V	≤ 1.3 V
Auxiliary voltage	–	–
Auxiliary voltage rated consumption	–	–
Auxiliary voltage rated data	–	–
Storage temperature	-25 °C...+60 °C	-25 °C...+60 °C
Ambient temperature	–	–
–, assembled without spacing on TS	-25 °C...+40 °C	-25 °C...+40 °C
–, assembled with ≥ 20 mm spacing on TS	-25 °C...+50 °C	-25 °C...+50 °C

Coordination of insulation according to VDE, Draft 11/94


Overvoltage category, input	II	II
Overvoltage category, output	I	I
Overvoltage category, input 1-input 2,	III	III
Output 1-output 2, input-output	2	2
Contamination class	–	–

Dimensions and connection data

see page 306 + 307

Fig. V

Fig. V

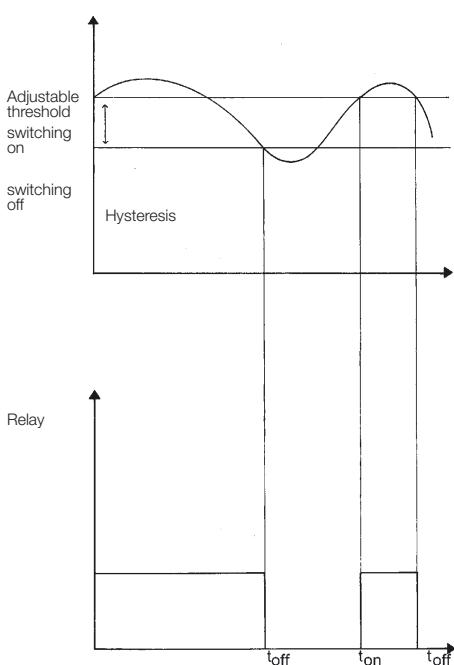

SMSI AC O

**With adjustable switching threshold
up to 250 mA**

Up to 2.5 A








SMSI AC O

**Current monitoring units with transistor output up to 5 A
without switching threshold**



SMSI AC

**Current monitoring with indicator up to 5 A
without switching threshold**

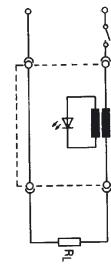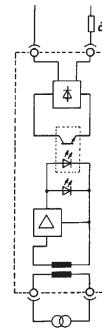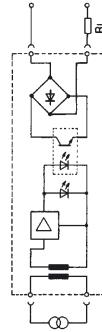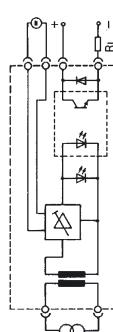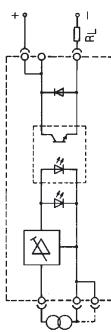

Type Cat. No.
SMSI 0.25 AC O 1156460000

Type Cat. No.
SMSI 2.5 AC O 1157360000

Type Cat. No.
SMSI 5 AC O 1112160000

Type Cat. No.
SMSI 5 AC O 8026930000

Type Cat. No.
SMSI 5 AC 1112060000

10 V...250 Vac

300 mA

1075 mVA

40 mA...250 mA

≤ 5%

≤ 40 ms

≤ 15 ms

< 4.3 V~eff (I = 250 mA)

5 V...50 V-

100 mA

≤ 1.3 V

24 Vuc ±10%

550 mW-/1150 mVA-

23 mA-/47 mA-

-25 °C...+60 °C

-25 °C...+40 °C

-25 °C...+50 °C

10 V...250 Vac

2.8 A

250 mVA

0.2 A...2.2 A

≤ approx. 35%

≤ 55 ms

≤ 20 ms

< 100 mV~eff (I = 10 A)

5 V...50 V-

100 mA

≤ 1.3 V

24 Vuc ±10%

550 mW-/1150 mVA-

23 mA-/47 mA-

-25 °C...+60 °C

-25 °C...+40 °C

-25 °C...+50 °C

5...250 Vac

1 A...5 A

250 mVA

≤ 20 ms

< 200 mV

24 Vuc ± 10%

100 mA

≤ 3.2 V

24 Vuc ±10%

550 mW-/1150 mVA-

23 mA-/47 mA-

-40 °C...+60 °C

-25 °C...+40 °C

-25 °C...+50 °C

5...250 Vac

1 A...5 A

250 mVA

≤ 20 ms

< 200 mV

5...48 Vdc

100 mA

≤ 1.6 V

24 Vuc ±10%

550 mW-/1150 mVA-

23 mA-/47 mA-

-40 °C...+60 °C

-25 °C...+40 °C

-25 °C...+50 °C

5...250 Vac

1 A...5 A

250 mVA

≤ 20 ms

< 200 mV

5...48 Vdc

100 mA

≤ 1.6 V

24 Vuc ±10%

550 mW-/1150 mVA-

23 mA-/47 mA-

-40 °C...+60 °C

-25 °C...+40 °C

-25 °C...+50 °C

II

I

III

2

II

I

III

2

II

I

III

2

II

I

III

2

Fig. V

Fig. V

Fig. II

Fig. II


Fig. II

Current Monitoring

- For AC/DC
- Adjustable switching threshold
- Relay output




SMSI DC R

With adjustable switching threshold
up to 250 mA

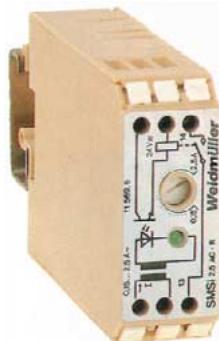

SMSI AC R

With adjustable switching threshold
up to 250 mA

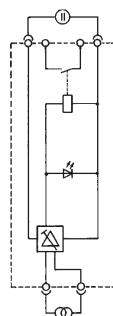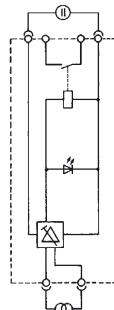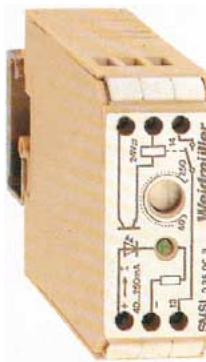

Ordering data

Type	Cat. No.
SMSI 0.25 DC R	1156660000

Type	Cat. No.
SMSI 0.25 AC R	1159960000

Technical data

Measurement circuit voltage

Max. permissible current in measurement circuit

Rated consumption ~ (VA)

Voltage drop at input

Adjustable switching threshold

Hysteresis between turn-on and turn-off point

Activation time tA

Reaction time tR

Recovery

Output voltage

Max. continuous output current

Auxiliary voltage

Rated consumption auxiliary voltage

Max. switching current

Contact

Contact material

Storage temperature

Ambient temperature

-, assembled without spacing on TS

-, assembled with ≥ 20 mm spacing on TS

10 V...250 Vdc

350 mA

750 mVA (I = 250 mA)

≤ 3 V (I = 250 mA)

40 mA...250 mA-

2% (250 mA) $< I_H < 10\%$ (40 mA)

-

≤ 12 ms

-

250 V

3 A

24 V~ $\pm 10\%$

250 mW/450 mVA

8 A

1 NO¹⁾

AgNi, gold-flashed

10 V...250 Vac

300 mA

1075 mVA (I = 250 mA)

≤ 3 V (I = 250 mA)

40 mA...250 mA-

$\leq 5\%$

≤ 25 ms

≤ 15 ms

-

250 V

3 A

24 V~ $\pm 10\%$

250 mW/450 mVA

8 A

1 NO¹⁾

AgNi, gold-flashed

-25 °C...+60 °C

-25 °C...+40 °C

-25 °C...+50 °C

II

III

2

Fig. V

Fig. V

Dimensions and connection data

see page 307


Fig. V

¹⁾ NC on request

Current Monitoring




SMSI AC R

With adjustable switching threshold
up to 2.5 A

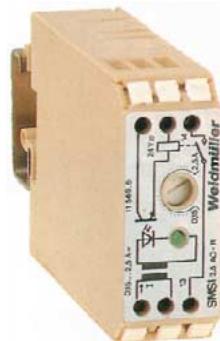

SMSI AC R

Current monitoring with relay output up to 5 A
without switching threshold

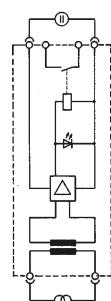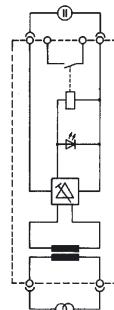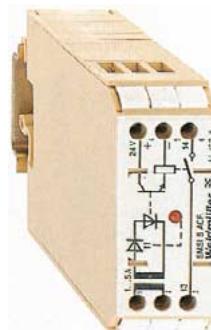

Ordering data

Type	Cat. No.
SMSI 2.5 AC R	1156960000

Type	Cat. No.
SMSI 5 AC R	1112260000

Technical data

Measurement circuit voltage

10 V...250 Vac

10 V...250 Vac

Max. permissible current in measurement circuit

3 A

1 A...5 A

Rated consumption ~ (VA)

250 mVA ($I = 2.5 \text{ A}$)

1 VA ($I = 5 \text{ A}$)

Voltage drop at input

< 0.1 V ($I = 2.5 \text{ A}$)

< 1 VA ($I = 5 \text{ A}$)

Adjustable switching threshold

0.2...2.2 A

Hysteresis between turn-on and turn-off point

≤ approx. 5%

Activation time t_A

≤ 45 ms

Reaction time t_R

≤ 30 ms

Recovery

< 75 ms

Output voltage

250 V

Max. continuous output current

3 A

Auxiliary voltage

24 Vuc ±10%

Rated consumption auxiliary voltage

1000 mW

Max. switching current

5 A

Contact

1 NO¹⁾

Contact material

AgNi, gold-plated 3 µm

Storage temperature

-40 °C...+60 °C

-40 °C...+60 °C

Ambient temperature

-25 °C...+40 °C

-25 °C...+40 °C

-, assembled without spacing on TS

-25 °C...+50 °C

-25 °C...+50 °C

-, assembled with ≥ 20 mm spacing on TS

Coordination of insulation to DIN VDE 0160, Draft 11/94

Oversupply category, input, output

II

II

Oversupply category, input1-input2,

III

III

Output1-output 2, input-output

2

2

Contamination class

Dimensions and connection data

see page 307

Fig. V

Fig. V


Voltage Monitoring

- Voltage monitoring from 18 to 299 V
- One and three phase version
- Adjustable switching threshold




SMSU 24 R



SMSU 48 R

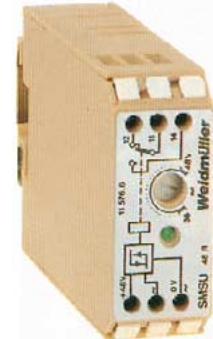

Block diagram/ timing diagram

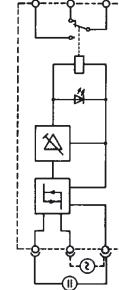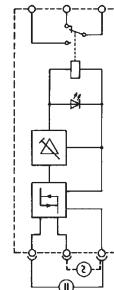

Ordering data

Type	Cat. No.
SMSU 24 R	1156760000

Type	Cat. No.
SMSU 48 R	1157660000

Technical data

**Voltage monitoring range
(also Supply voltage)**

Rated consumption – (W)

Rated consumption ~ (VA)

Adjustable switch-off threshold

Hysteresis/factory setting

Switching points

Activation time t_A

Reaction time t_R

Derating curve

a = assembled without spacing on mounting rail

b = assembled with ≥ 20 mm spacing on mounting rail

18 Vdc...27 Vdc or

18 Vac...27 Vac/50 Hz

< 0.8 W

< 0.9 VA

18 Vuc...24 Vuc

1%...10%/5%

–

< 4 s

< 300 ms

36 Vdc...53 Vdc or

36 Vac...53 Vac/50 Hz

< 1 W

< 1.5 VA


36 Vuc...48 Vuc

1%...10%/5%

–

< 2.5 s

< 300 ms

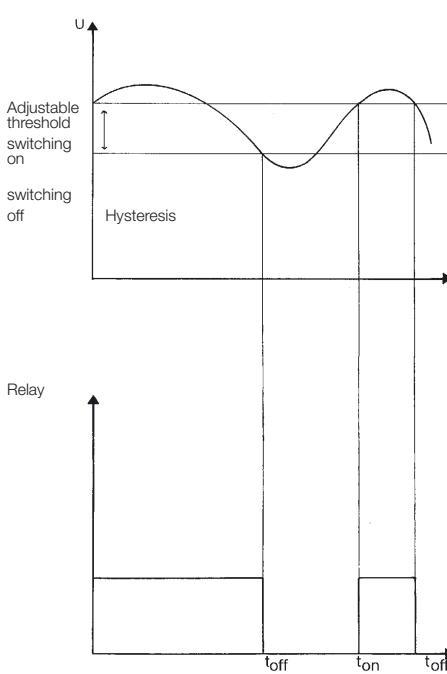

Max. output voltage

250 V~

Max. switching current

8 A

Max. continuous output current

3 A

Contact

1 changeover contact

Contact material

AgNi 0.15 gold-flashed

Switching capacity (resistive load)

2000 VA

Fuse

AgNi 0.15 gold-flashed

Storage temperature

-40 °C...+60 °C

Ambient temperature

-40 °C...+60 °C

–, assembled without spacing on TS

-25 °C...+50 °C

–, assembled with ≥ 20 mm spacing on TS

-25 °C...+60 °C

-25 °C...+50 °C

-25 °C...+60 °C



Coordination of insulation to DIN VDE 0160, Draft 11/94

Overvoltage category, input, input 1-input 2, output

Overvoltage category, input-output, output 1-output 2

Contamination class

Dimensions and connection data see page 306

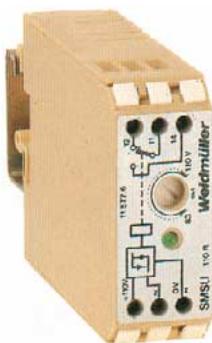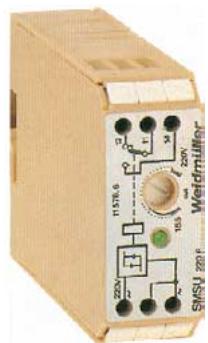SMSU 110 R**SMSU 220 R****SMSU 260 R****SMSU 3x220 R**






Three-phase with
adjustable switching threshold

**SMSU 1-24 DC**

Single-phase without
switching threshold

**SMSU 1-230 AC/DC**

Single-phase without
adjustable switching threshold

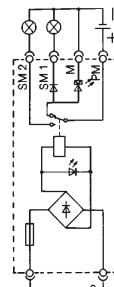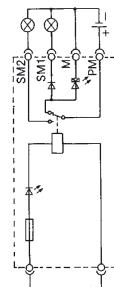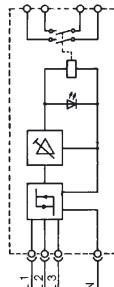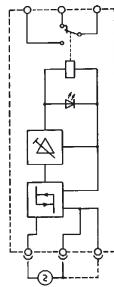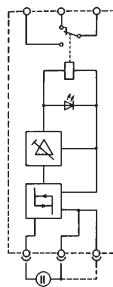

Type	Cat. No.
SMSU 110 R	1157760000

Type	Cat. No.
SMSU 220 R	1157860000

Type	Cat. No.
SMSU 260 R	1160160000

Type	Cat. No.
SMSU	
3x220 R, 2 NO	1156560000

Type	Cat. No.
SMSU 24 DC	0555060000

Type	Cat. No.
SMSU 230 AC/DC	0555160000

83 Vdc...121 Vdc or	
83 Vac...121 Vac/50 Hz	
< 1.6 W	-
< 1.5 W	-
83 Vuc...110 Vuc	
1%...10%/5%	
-	
< 4 s	< 3 s
< 300 ms	< 2 s







165 Vac...253 Vac/50 Hz	
200 V...299 Vac/50 Hz	
< 10 VA	< 10 VA
165 Vac...220 Vac	
1%...15%/5%	
-	
< 3 s	< 3 s
< 2 s	< 2 s

200 V...299 Vac/50 Hz	
165 V~...230 Vac 50 Hz	
< 10 VA	< 10 VA
200 V...260 V	
1%...15%/5%	
-	
< 3 s	< 3 s
< 2 s	< 2 s

165 V~...230 Vac 50 Hz	
24 Vdc ± 10%	
0.5 W	
-	
24 Vdc ± 10%	
0.9 W	
-	
1.1 W	

24 Vdc ± 10%	
0.5 W	
-	
On: 18.5 V, off: 5 V	
15 ms	
< 80 ms	
10 ms	

230 Vdc ± 10%	
0.9 W	
-	
On: 140 V~/130 V~, off: 70 V~/80 V~	
-	
-	

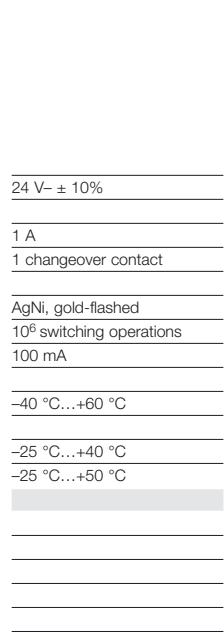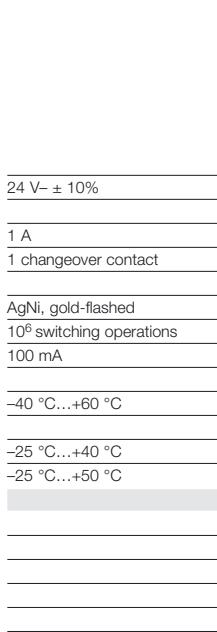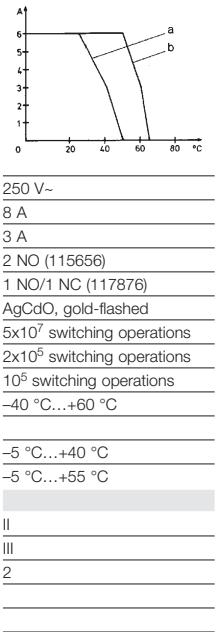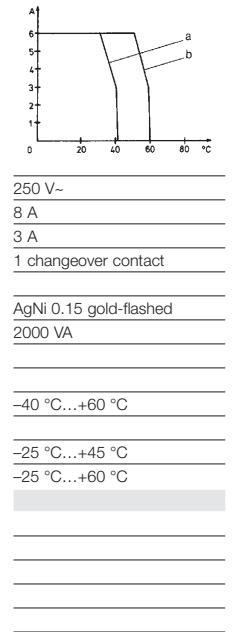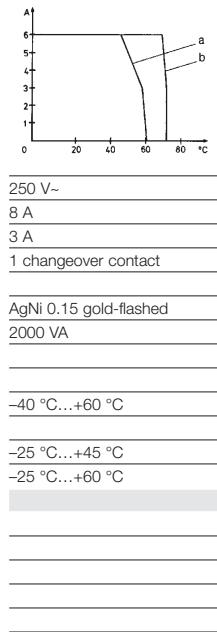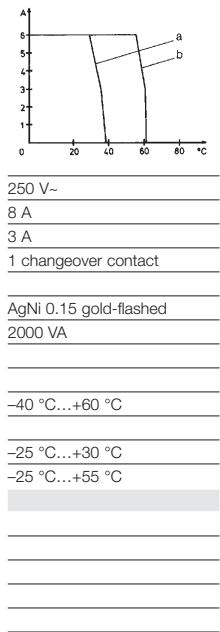


Movement and Rotational Speed Monitoring

SMS SIZA

Rotational speed monitoring



Block diagram

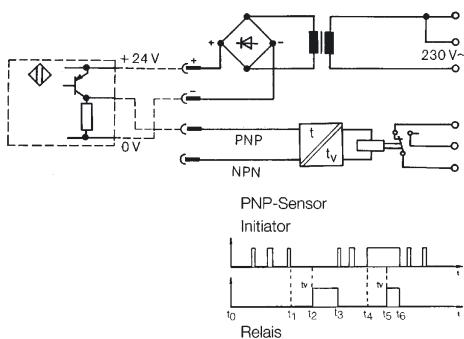

Ordering data

Type	Cat. No.
SMS/SIZA	1110560000

Description

Power supply with delayed turn-off relay output for three-conductor DC initiators (NPN or PNP).

The transformer supplies the initiator with 24 V DC. The initiator signal activates the relay, at which time the adjustable turn-off delay becomes effective. This module is particularly suitable for monitoring cyclic movements, e.g. down-times monitoring of conveyor drives, ventilators and pumps or stroke monitoring of valves, die cutters and drilling heads.

A contact element actuates the initiator at regular intervals. If these pulses cease, i.e. the proximity switch is continuously actuated (t_1-t_6) or deactivated (t_1-t_3), the relay transmits a signal after the set time has elapsed. During normal operation, the time function bridges the gaps between regular pulses (t_0-t_2).

Technical data

Operating voltage	230 Vdc +5 -15%
Initiator type/initiator voltage	P or N switched/24 Vdc
Output voltage	250 V
Continuous current	4 A
Max. switching capacity (resistive load)	2000 VA
Contact	1 changeover contact
Contact material	AgNi 0.15 gold-flashed
Mechanical service life	> 10 ⁷ switching operations
Time range	0.5...5 s

Coordination of insulation to VDE DIN 0160, draft11/94


Rated voltage	300 V
Rated surge voltage	4 kV
Oversupply category	III
Contamination class	2
Clearance and creepage distance	≥ 3 mm
EMC	EN 50 081-1/50 082-2

Accessories and dimensions see page 307


Fig. VI

Namur Switch Amplifiers



EGV-Namur

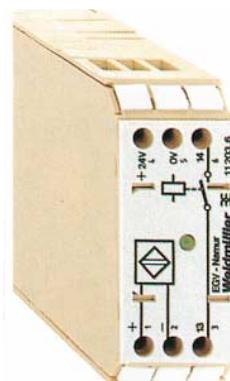

EGV-Inverter

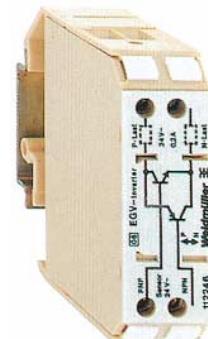

Block diagram

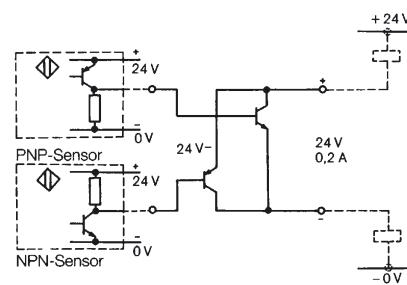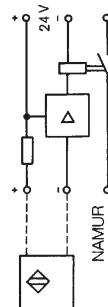

Ordering data

Type	Cat. No.
EGV Namur	1120360000

Type	Cat. No.
EGV Inverter	1122460000

Description

Switching amplifier for 2-wire Namur initiators with relay output. Enables the use of economic Namur initiators with short design lengths. This is particularly valid for areas where initiators are subjected to heavy mechanical stresses, and often need to be replaced. A potential-free NO contact is available on the output side for switching larger ratings (2000 VA). The Namur initiator can be directly connected to the module. LED function indicators indicate switching statuses.

This module inverts the switching function of electronic outputs. A PNP output is changed into an NPN output with the load connected unilaterally against the positive potential (the negative potential is switched through). An NPN output is changed into a PNP output with the load connected unilaterally to the frame potential (the positive potential is switched through). The module reduces the inventory of sensors and electronic switches with PNP/NPN outputs to a single type.

Technical data

Input voltage	24 Vdc $\pm 10\%$
Initiator type/initiator voltage	approx. 8 Vdc
Output voltage, -current	250 Vac/dc
Continuous current	3 A
Max. switching capacity (resistive load)	2000 VA
Contact	1 NO
Contact material	AgNi 0.15 gold-flashed
Mechanical service life	> 10 ⁷ switching operations
Ambient temperature	40 °C mounted

24 Vdc $\pm 10\%$ (closed circuit current < 10 mA)
24 Vdc $\pm 10\%$ (switching threshold approx. 15 V)
200 mA

Coordination of insulation to VDE DIN 0160, draft11/94

Rated voltage	300 V
Rated surge voltage	4 kV
Oversurge category	III
Contamination class	2
Clearance and creepage distance	≥ 3 mm
EMC	EN 50 081, EN 50 082, EN50 011

EN 50 081, EN 50 082, EN50 011
EN 50 081, EN 50 082, EN50 011

Accessories and dimensions see page 307

Fig. VI

Fig. V

Set Point Generator

EMA/SW 24

- Set point generator
- switchable -10.5 V/+10.5 V




Set point 1 or set point 2 can be switched to the module's output as required.

The changeover is performed safely separated via the control input E1. The output voltage values (0...10.5 V) can be set using the spindle operated potentiometers SW1 and SW2. The control input E^a determines the polarity safely separated

(-10.5 V ... 0 V ... +10 V).

Control input E1: 0 V = set point 1,
24 V = set point 2,

Control input E2: 0 V = positive set point,
24 V = negative set point

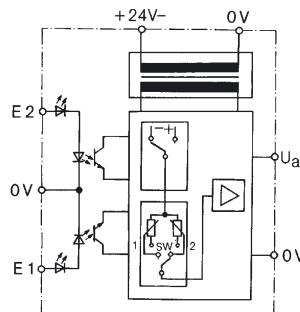

Ordering data

Type Cat. No.
EMA/SW 1172660000

Technical data

Input signal/measurement range

Control voltage
Max. input current

24 V±20 %
≤ 7 mA at 24 V

Display
Setting

each control input: red LED
via trimming potentiometer
25 rotations nom.

Output signal

Output
Output current
Load resistance

adjustable from -10.5 V...+10.5 V

Voltage output selection by E1/E2
max. ±25 mA at Urated=24 V-
min. 400 Ω at Urated=24 V

Slew-Rate

0.168 V/μs

Supply voltage UB
Residual ripple
Reaction time

24 V- ± 20 %, 30 mA ($R_L = \infty$)
30 mV/106 kHz (at U_{max})
rising 50 μs
decreasing 80 μs

Isolation voltage, voltage strength

1 kV-

Input/output/supply

4 kV_{eff}

Input-Output/TS

-20 °C...+70 °C

Storage temperature

0 °C...+50 °C

Operating temperature

Insulation coordination according to EN 50 178

Overvoltage category

III

Contamination class

2

Accessories, dimensions and connection data see page 307

Fig. V

8-Bit Analogue/Digital Converters

Hold function (H):

The converter can, for example, by means of the hold function (H) be matched to the cycle time of a PLC. Holding and release of the conversion. The Hold input (H) is internally connected to 0 V via a resistor. In order to store the last signal, the Hold input (H) must be supplied with 24 V.

Enable function (E):

The Enable circuit (E) allows several converters, e.g. on an input card of a PLC, to be switched on. The Enable input (E) is connected internally to 0 V via a resistor. In order to make the connection to the PLC, one converter must be disconnected. The other converters are supplied with 24 V (at least 12 V). This causes the converters at the output to be highly resistive.

RS/U-D8




RS/I-D 8




Functions table (example)

Terminal								Digital value/ digital value	Analog voltage	Analogue voltage			
PIN													
MSB		LSB											
E8	E7	E6	E5	E4	E3	E2	E1						
0	0	0	0	0	0	0	0	0 V					
0	0	0	0	0	0	0	1						
0	0	0	0	0	0	0	0						
0	0	0	0	0	0	1	1						
-	-	-	-	-	-	-	-						
-	-	-	-	-	-	-	-						
1	1	1	1	1	1	0	1						
1	1	1	1	1	1	1	0						
1	1	1	1	1	1	1	1	+10 V					

Block diagram

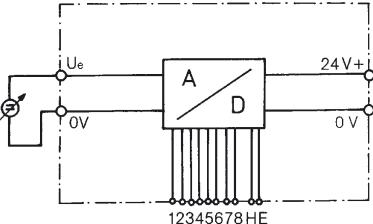

Block diagram

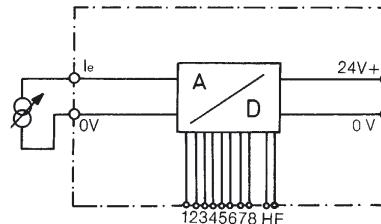

Ordering data

Type	Cat. No.						
RS/U-D 8	1122361001	RS/U-D 8	1160361001	RS/I-D 8	1160561001	RS/I-D 8	1168561001

Technical data

Input signal

Max. input voltage	-10 V...+10 V	0...10 V	0...20 mA	4...20 mA
Max. input current				
Input resistance	$\leq 55 \mu\text{A}$	$\leq 25 \mu\text{A}$	3.5 V	3.5 V
Max. limit frequency	$\geq 200 \text{k}\Omega$	$\geq 400 \text{k}\Omega$	25 mA	25 mA
Resolution	5 kHz at Full-Scale (Sinus) ¹⁾	5 kHz at Full-Scale (Sinus) ¹⁾	$\geq 51 \Omega$	$\geq 51 \Omega$
	78 mV c 1 LSB	39 mV c 1 LSB	5 kHz at Full-Scale (Sinus) ¹⁾	5 kHz at Full-Scale (Sinus) ¹⁾

Output signal

8 Bit (1 Bit prefix)	8 Bit	8 Bit	8 Bit
Output current	$\leq 25 \text{ mA}$ (as source)	$\leq 25 \text{ mA}$ (as source)	$\leq 25 \text{ mA}$ (as source)
Output level	approx. 17 V c H, 0 V c L	approx. 17 V c H, 0 V c L	approx. 17 V c H, 0 V c L
Prefix	MSB: H c positive, L c negative	approx. 17 V c H, 0 V c L	approx. 17 V c H, 0 V c L
Transmission error	$\pm 1 \text{ LSB}$	$\pm 1 \text{ LSB}$	$\pm 1 \text{ LSB}$
Conversion time	$\leq 4 \mu\text{s}$	$\leq 4 \mu\text{s}$	$\leq 4 \mu\text{s}$
Supply	24 V-, $\pm 20\%$, 35 mA (plus output current)	24 V-, $\pm 20\%$, 35 mA (plus output current)	24 V-, $\pm 20\%$, 35 mA (plus output current)

Connection arrangement

Terminal 1	LSB						
:	:	:	:	:	:	:	:
Terminal 8	MSB						
Terminal 9	Enable ²⁾						
Terminal 10	Hold						
Hold function:		Hold function:		Hold function:		Hold function:	
High c +24 V c storage of last converted value		High c +24 V c storage of last converted value		High c +24 V c storage of last converted value		High c +24 V c storage of last converted value	
Low c 0 V c free conversion		Low c 0 V c free conversion		Low c 0 V c free conversion		Low c 0 V c free conversion	

Storage temperature	-40 °C...+85 °C	40 °C...+85 °C	40 °C...+85 °C
Operating temperature	0 °C...+50 °C	0 °C...+50 °C	0 °C...+50 °C

EMC EN 50 081-1/50 082-2

¹⁾ 1 LSB-Accuracy

²⁾ Enable: 24 V = tristate
0 V = free conversion


8-Bit Digital/Analogue Converters

RS/D 8-U



Block diagram

Pin assignment

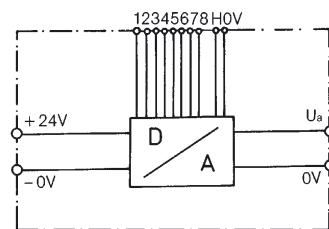


RS/D 8-I



Block diagram

Pin assignment

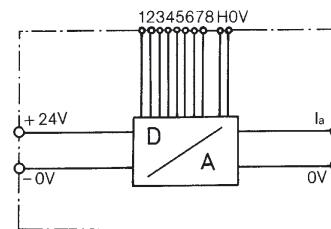

Ordering data

Type	Cat. No.
RS/D 8-U	1123361001

Type	Cat. No.
RS/D 8-U	1160761001

Type	Cat. No.
RS/D 8-I	1165861001

Type	Cat. No.
RS/D 8-I	1169261001

Technical data

Input signal

8 Bit (1 Bit prefix)	8 Bit	8 Bit	8 Bit
5...24 V (typ. 24 V)	5...24 V (typ. 24 V)	5...24 V (typ., max. 30 V) c H	5...24 V (typ., max. 30 V) c H
2.5 mA	2.5 mA	50 kΩ per input	50 kΩ per input
50 kΩ per input	50 kΩ per input	50 kΩ per input	50 kΩ per input
Prefix	MSB: H c positive, L c negative	78 mV c 1 LSB	78 μA c 1 LSB
Resolution	78 mV c 1 LSB	39 mV c 1 LSB	62.5 μA c 1 LSB

Output signal

-10 V...+10 V	0...10 V	0...20 mA	4...20 mA
≤ 10 mA max. current	≤ 10 mA	0...20 mA (as source)	4...20 mA (as source)
Offset	≤ 20 mV	max. 0.08 mA	4 mA
Load resistance	≥ 1 kΩ	≤ 500 Ω	≤ 500 Ω
Transmission error	±1 LSB	±1 LSB	±1 LSB
Conversion time	≤ 30 μs	≤ 30 μs	≤ 30 μs
Supply	24 V-, ±20 %, 25 mA (plus output current)	24 V-, ±20 %, 25 mA (plus output current)	24 V-, ±20 %, 25 mA (plus output current)

Connection arrangement

Terminal 1	LSB						
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
Terminal 8	MSB						
Terminal 9	Hold						
Terminal 10	0 V						
Hold function:		Hold function:		Hold function:		Hold function:	
High c +24 V c storage of last converted value		High c +24 V c storage of last converted value		High c +24 V c storage of last converted value		High c +24 V c storage of last converted value	
Low c 0 V c free conversion		Low c 0 V c free conversion		Low c 0 V c free conversion		Low c 0 V c free conversion	

Storage temperature	-40 °C...+85 °C	-40 °C...+85 °C	-40 °C...+85 °C
Operating temperature	0 °C...+50 °C	0 °C...+50 °C	0 °C...+50 °C

EMC EN 50 081-1/50 082-2

12-Bit Analogue/Digital Converters

Hold function (H):


The converter can, for example, by means of the hold function (H) be matched to the cycle time of a PLC. Holding and release of the conversion. The Hold input (H) is internally connected to 0 V via a resistor. In order to store the last signal, the hold input (H) must be supplied with 24 V.



Functions table (example)

Analog current Analog current	Digital value/ digital value											
	Terminal											
	PIN											
4 mA	MSB	12	11	10	9	8	7	6	5	4	3	LSB
0	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	1	0
0	0	0	0	0	0	0	0	0	0	0	1	0
0	0	0	0	0	0	0	0	0	0	0	1	1
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
1	1	1	1	1	1	1	1	1	1	1	0	1
1	1	1	1	1	1	1	1	1	1	1	1	0
20 mA	0	1	1	1	1	1	1	1	1	1	1	1

Block diagram

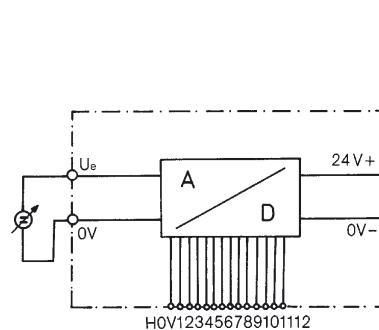

Block diagram


Ordering data

Type	Cat. No.						
RS/U-D 12	1168261001	RS/U-D 12	1168361001	RS/I-D 12	1168461001	RS/I-D 12	1169161001

Technical data


Input signal/measurement range	-10...+10 V	0...10 V	0...20 mA	4...20 mA
Max. input voltage	±15 V	15 V	30 mA	30 mA
Max. input current			500 Ω	500 Ω
Input resistance	100 kΩ	100 kΩ		
Prefix	MSB: H c positive, L c negative			
Resolution	4.88 mV c 1 LSB	2.44 mV c 1 LSB	4.9 μA c 1 LSB	4 μA c 1 LSB
Output signal	12 Bit (1 Bit prefix)	12 Bit	12 Bit	12 Bit
Output current	≤ 25 mA (as source)	≤ 25 mA (as source)	≤ 25 mA (as source)	≤ 25 mA (as source)
Output level	24 V c H, 0 V c L	24 V c H, 0 V c L	24 V c H, 0 V c L	24 V c H, 0 V c L
Load resistance				
Transmission error	±1 LSB	±1 LSB	±1 LSB	±1 LSB
Conversion time	≤ 50 μs	≤ 50 μs	≤ 50 μs	≤ 50 μs
Temperature coefficient	1 LSB *	1 LSB *	1 LSB *	1 LSB *
Supply	24 V-, ±20 %	24 V-, ±20 %	24 V-, ±20 %	24 V-, ±20 %
Max. power loss	4 W	4 W	4 W	4 W
Connection arrangement	Terminal 1 LSB	Terminal 1 LSB	Terminal 1 LSB	Terminal 1 LSB
	⋮ ⋮	⋮ ⋮	⋮ ⋮	⋮ ⋮
Storage temperature	Terminal 12 MSB	Terminal 12 MSB	Terminal 12 MSB	Terminal 12 MSB
Operating temperature	Hold function: High c +24 V c storage of digital signal Low c 0 V c enabling the conversion cycle	Hold function: High c +24 V c storage of digital signal Low c 0 V c enabling the conversion cycle	Hold function: High c +24 V c storage of digital signal Low c 0 V c enabling the conversion cycle	Hold function: High c +24 V c storage of digital signal Low c 0 V c enabling the conversion cycle
EMC EN 50 081-1/50 082-2	-40 °C...+80 °C 0 °C...+50 °C	-40 °C...+80 °C 0 °C...+50 °C	-40 °C...+80 °C 0 °C...+50 °C	-40 °C...+80 °C 0 °C...+50 °C

12-Bit Digital/Analogue Converters

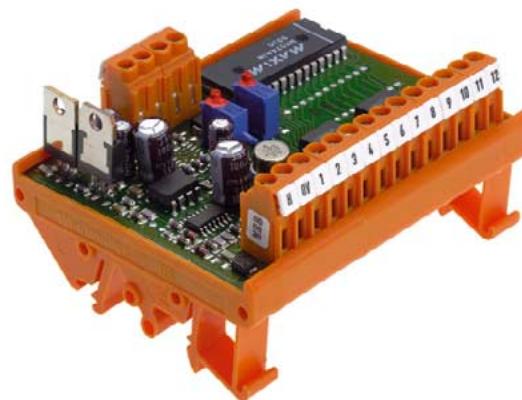

Block diagram

Block diagram

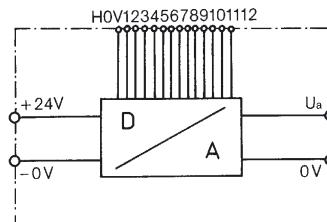

Ordering data

	Type RS/D 12-U	Cat. No. 1160861001		Type RS/D 12-U	Cat. No. 1166161001		Type RS/D 12-I	Cat. No. 1166061001		Type RS/D 12-I	Cat. No. 1165961001
Technical data											
Input signal/measurement range	12 Bit (1 Bit as prefix)		12 Bit		12 Bit		12 Bit		12 Bit		
Max. input voltage	24 V-, ±20 %		24 V-, ±20 %		24 V-, ±20 %		24 V-, ±20 %		24 V-, ±20 %		
Input current, I_{nom}	4.2 mA		4.2 mA		4.2 mA		4.2 mA		4.2 mA		
Input resistance	5.7 kΩ		5.7 kΩ		5.7 kΩ		5.7 kΩ		5.7 kΩ		
Prefix	MSB: H c positive, L c negative										
Resolution	4.88 mV c 1 LSB		2.44 mV c 1 LSB		4.9 μA c 1 LSB		4.9 μA c 1 LSB		4 μA c 1 LSB		
Output signal											
Output current	-10 V...+10 V		0 V...10 V		0...20 mA		4...20 mA				
Output level	≤ 10 mA		≤ 10 mA		0...20 mA (as source)		4...20 mA (as source)				
Load resistance	≥ 1 kΩ		≥ 1 kΩ		≤ 500 Ω		≤ 500 Ω				
Transmission error	±1 LSB		±1 LSB		±1 LSB		±1 LSB				
Conversion time	≤ 4 μs		≤ 4 μs		≤ 4 μs		≤ 4 μs				
Temperature coefficient	±100 ppm from FSR/°C		±100 ppm from FSR/°C		±100 ppm from FSR/°C		±100 ppm from FSR/°C				
Supply	24 V-, ±20 %, 40 mA		24 V-, ±20 %, 40 mA		24 V-, ±20 %, 60 mA		24 V-, ±20 %, 60 mA				
Max. power loss											
Connection arrangement	Terminal 1 LSB ⋮ Terminal 12 MSB		Terminal 1 LSB ⋮ Terminal 12 MSB		Terminal 1 LSB ⋮ Terminal 12 MSB		Terminal 1 LSB ⋮ Terminal 12 MSB				
Hold function:			Hold function:		Hold function:		Hold function:				
High c +24 V c storage of analogue signal			High c +24 V c storage of analogue signal		High c +24 V c storage of analogue signal		High c +24 V c storage of analogue signal				
Low c 0 V c enabling the conversion cycle			Low c 0 V c enabling the conversion cycle		Low c 0 V c enabling the conversion cycle		Low c 0 V c enabling the conversion cycle				
Storage temperature	-40 °C...+85 °C		-40 °C...+85 °C		-40 °C...+85 °C		-40 °C...+85 °C				
Operating temperature	0 °C...+50 °C		0 °C...+50 °C		0 °C...+50 °C		0 °C...+50 °C				

EMC EN 50 081-1/50 082-2