

Customer Information Sheet




IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

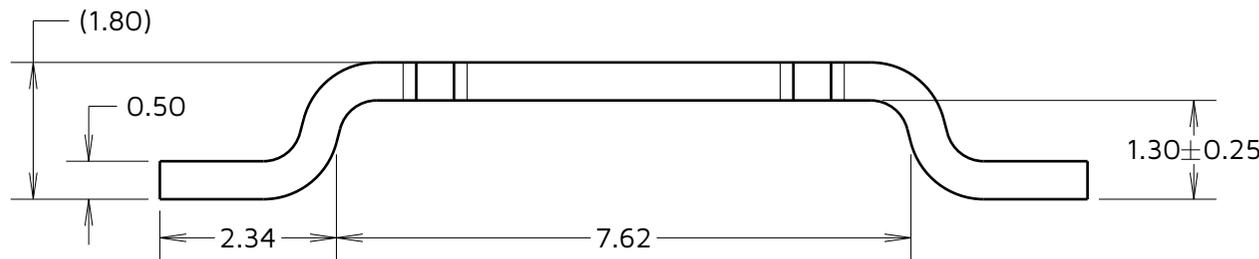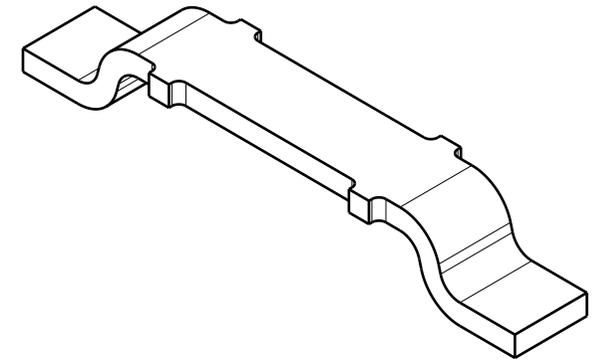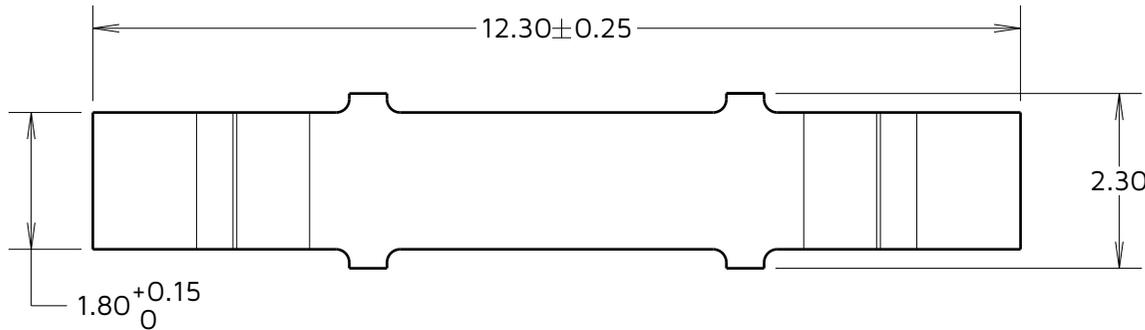

COMPONENT SPECIFICATION:

MATERIAL = BRASS CW508L 1/2 HARD
FINISH

46 = 4µm 100% TIN


ELECTRICAL:

CURRENT RATING = 10A (30°C TEMP RISE)

CONTACT RESISTANCE = 20mΩ MAX

ENVIRONMENTAL:

OPERATING TEMPERATURE = -40°C TO +125°C

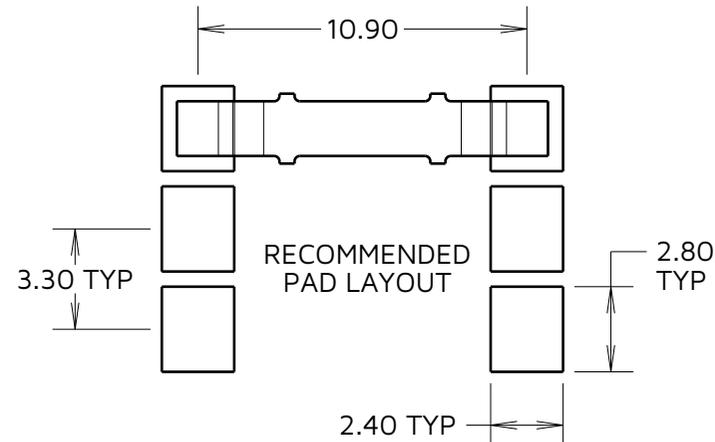

1. FOR TAPE AND REELED COMPONENT, SEE DRAWING S162-XXR.
2. PACKING: 1000 COMPONENTS PER BAG.

AY	12	13.02.24	33594
NAME	ISS.	DATE	CN/CO
APPROVED: A.YEOMANS			
CHECKED: R.PORLTOCK			
DRAWN: W. J. BOURNE			
ASSEMBLY DRG:			
PART WEIGHT:		MAT'L USAGE:	

HARWIN

www.harwin.com

TOLERANCES

X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.20mm
X.XXX = ±0.01mm

ANGLES = ±5°
UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL:

BRASS CW508L

FINISH: SEE ORDER CODE

S/AREA: mm²

TITLE:

**SURFACE MOUNT JUMPER
(LOOSE)**

DRAWING NUMBER:

S1621-46

SHT
2
OF 2