




01 SERIES
LOW PROFILE
LOW INSERTION

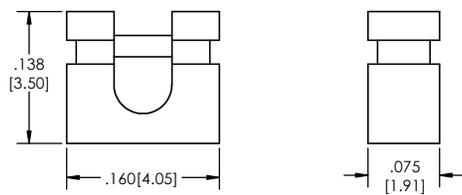

03 SERIES
HIGH PROFILE
LOW INSERTION
HANDLE OPTION

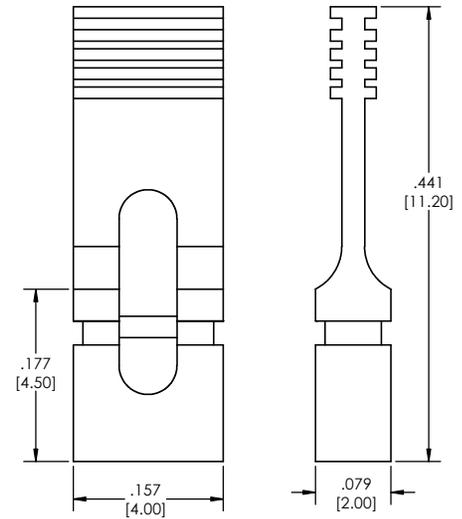

02 SERIES
HIGH PROFILE
LOW INSERTION

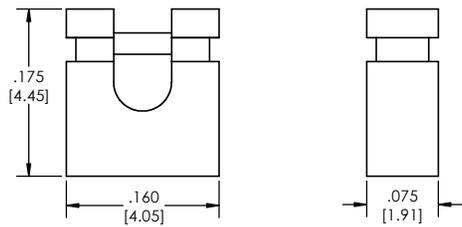

SH-2 X XX LF
(A) (B) (C)

- A. Plating Options
 - See Plating Options below
- B. Shunt Style
 - See Shunt Style box below
- C. Lead Free

Plating options	
G	-10µ Gold on Contact Area/ Flash on Tail
F	- Gold Flash over Entire Pin
T	- Matte Tin all Over

Shunt Style	
01	01 Series Low Profile, Low Insertion
02	02 Series High Profile, Low Insertion
03	03 Series High Profile, High Insertion, Handle Option

Specifications:
 Current Rating: 3.0 Ampere
 Insulation Resistance: 1000M Ohms Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20M Ohms Max.
 Operation Temperature: -40°C to +105°C
 Max. Process Temperature
 Peak: 260°C up to 10 secs.
 Process: 230°C up to 60 secs.
 Wave: 260°C up to 6 secs.
 Manual Solder: 350°C up to 5 secs.

Materials:
 Contact Material: Phosphor Bronze
 Insulator Material: Nylon 6T

Products cut to specific sizes are uncancellable/ nonreturnable.
 Parts are subject to change without notice.



PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Major League Electronics. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Major League Electronics IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES		EOW	01/20/15
TOLERANCES:		GWE	01/20/15
ONE DECIMALS ±.100		ENG APPR.	
TWO DECIMAL ±.100		MFG APPR.	
THREE DECIMAL ±.005		ADDRESS:	
FOUR DECIMAL ±.002		2533 Centennial Blvd. Jeffersonville, IN 47130 Phone: 812-670-4174 Fax: 812-670-4175 E-Mail: mle@mlelectronics.com	
INTERPRET GEOMETRIC TOLERANCING PER:		TITLE: SH-2 SERIES	
MATERIAL:		SIZE DWG. NO. C	
FINISH:		REV B	
NEXT ASSY USED ON:		SCALE 16:1	
APPLICATION:		SHEET 1 OF 1	
DO NOT SCALE DRAWING			