

MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017  
<https://www.phoenixcontact.com/us/products/2902017>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Configurable potiposition transducer with plug-in connection technology for connecting potentiometers from 0 Ω ... 100 Ω to 0 kΩ ... 100 kΩ. Configurable via DIP switch or software. push-in connection technology, standard configuration

Product description

Configurable, 3-way isolated potentiometer measuring transducer with plug-in connection technology. The measured values are converted into a linear and freely adjustable current or voltage signal. You can configure the device using one of the free software solutions. Default settings can also be made directly on the device by simply using the DIP switches (see configuration table). If it is not possible to fully utilize the potentiometer range, you can specify the upper and lower potentiometer values in the software. The measuring transducer supports fault monitoring and NFC communication.

Commercial data

|                                      |                    |
|--------------------------------------|--------------------|
| Item number                          | 2902017            |
| Packing unit                         | 1 pc               |
| Minimum order quantity               | 1 pc               |
| Sales key                            | C404               |
| Product key                          | CK1432             |
| Catalog page                         | Page 90 (C-5-2019) |
| GTIN                                 | 4046356649568      |
| Weight per piece (including packing) | 115.333 g          |
| Weight per piece (excluding packing) | 108.9 g            |
| Customs tariff number                | 85437090           |
| Country of origin                    | DE                 |

# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## Technical data

### Notes

#### Utilization restriction

|          |                                                                           |
|----------|---------------------------------------------------------------------------|
| EMC note | EMC: class A product, see manufacturer's declaration in the download area |
|----------|---------------------------------------------------------------------------|

### Product properties

|                 |                         |
|-----------------|-------------------------|
| Product type    | Potiposition transducer |
| Product family  | MINI Analog Pro         |
| No. of channels | 1                       |
| Configuration   | DIP switches            |
|                 | Software                |
|                 | App                     |

#### Insulation characteristics

|                      |    |
|----------------------|----|
| Overvoltage category | II |
| Pollution degree     | 2  |

### System properties

#### Functionality

|               |              |
|---------------|--------------|
| Configuration | DIP switches |
|               | Software     |
|               | App          |

### Electrical properties

|                                  |                                         |
|----------------------------------|-----------------------------------------|
| Electrical isolation             | 3-way isolation                         |
| Protective circuit               | Transient protection                    |
| Step response (0–99%)            | < 60 ms                                 |
| Maximum temperature coefficient  | 0.01 %/K                                |
| Temperature coefficient, typical | 0.01 %/K                                |
| Maximum transmission error       | < 0.1 % ( $R < 240 \Omega = < 0,2 \%$ ) |

#### Electrical isolation Input/output/power supply

|                          |                                                   |
|--------------------------|---------------------------------------------------|
| Rated insulation voltage | 300 V <sub>rms</sub>                              |
| Test voltage             | 3 kV AC (50 Hz, 60 s)                             |
| Insulation               | Reinforced insulation according to IEC/EN 61010-1 |

#### Supply

|                             |                                                                                                                                                                                                                |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Nominal supply voltage      | 24 V DC                                                                                                                                                                                                        |
| Supply voltage range        | 9.6 V DC ... 30 V DC (The DIN rail connector (ME 6,2 TBUS-2 1,5/5-ST-3,81 GN, item no. 2869728) can be used to bridge the supply voltage. It can be snapped onto a 35 mm DIN rail in accordance with EN 60715) |
| Typical current consumption | 33 mA (24 V DC)                                                                                                                                                                                                |

# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

|                   |                                                              |
|-------------------|--------------------------------------------------------------|
|                   | 68 mA (12 V DC)                                              |
| Power consumption | ≤ 850 mW (at $I_{OUT} = 20$ mA, 9.6 V DC, 600 $\Omega$ load) |

## Input data

Signal: Resistance

|                         |                                                              |
|-------------------------|--------------------------------------------------------------|
| Number of inputs        | 1                                                            |
| Available input sources | 3-wire potentiometer                                         |
| Resistance range        | 0 $\Omega$ ... 100 $\Omega$<br>0 $\Omega$ ... 100 k $\Omega$ |

## Output data

Signal: Voltage/current

|                                         |                                                                                                                                                                                      |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of outputs                       | 1                                                                                                                                                                                    |
| Voltage output signal                   | 1 V ... 5 V (via DIP switch)<br>10 V ... 0 V (via DIP switch)<br>0 V ... 5 V (via DIP switch)<br>0 V ... 10 V (via DIP switch)<br>0 V ... 10.5 V (can be set via software)           |
| Max. voltage output signal              | ≈  V                                                                                              |
| Non-load voltage                        | < 17.5 V                                                                                                                                                                             |
| Current output signal                   | 0 mA ... 20 mA (via DIP switch)<br>4 mA ... 20 mA (via DIP switch)<br>20 mA ... 0 mA (via DIP switch)<br>20 mA ... 4 mA (via DIP switch)<br>0 mA ... 21 mA (can be set via software) |
| Max. current output signal              | 24.6 mA                                                                                                                                                                              |
| Short-circuit current                   | < 31.5 mA                                                                                                                                                                            |
| Load/output load voltage output         | ≥ 10 k $\Omega$                                                                                                                                                                      |
| Load/output load current output         | ≤ 600 $\Omega$ (20 mA)                                                                                                                                                               |
| Ripple                                  | < 20 mV <sub>PP</sub><br>< 20 mV <sub>PP</sub> (10 k $\Omega$ )                                                                                                                      |
| Resolution, outputs (voltage)           | 1 mV                                                                                                                                                                                 |
| Resolution, outputs (current)           | 2 $\mu$ A                                                                                                                                                                            |
| Behavior in the event of a sensor error | configurable                                                                                                                                                                         |

## Connection data

|                                  |                                                                                                                              |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Connection method                | Push-in connection                                                                                                           |
| Stripping length                 | 10 mm                                                                                                                        |
| Conductor cross section rigid    | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> (with ferrule)<br>0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> (without ferrule) |
| Conductor cross section flexible | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>                                                                                 |
| Conductor cross section AWG      | 24 ... 12 (flexible)                                                                                                         |

# MINI MCR-2-POT-UI-PT - Resistance/potipotition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## Ex data

|                       |        |
|-----------------------|--------|
| Ex installation (EPL) | Gc     |
|                       | Div. 2 |

## Interfaces

Data: IFS interface

|                   |                  |
|-------------------|------------------|
| Connection method | Micro USB type B |
|-------------------|------------------|

## Signaling

|                           |           |
|---------------------------|-----------|
| Operating voltage display | Green LED |
| Error indication          | Red LED   |

## Dimensions

|        |           |
|--------|-----------|
| Width  | 6.2 mm    |
| Height | 109.81 mm |
| Depth  | 119.2 mm  |

## Material specifications

|                                                        |                 |
|--------------------------------------------------------|-----------------|
| Color                                                  | gray (RAL 7042) |
| Housing material                                       | PBT             |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 2     |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 2     |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 2     |

## Environmental and real-life conditions

Ambient conditions

|                                         |                               |
|-----------------------------------------|-------------------------------|
| Degree of protection                    | IP20 (not assessed by UL)     |
| Ambient temperature (operation)         | -40 °C ... 70 °C              |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C              |
| Altitude                                | ≤ 2000 m                      |
| Permissible humidity (operation)        | 5 % ... 95 % (non-condensing) |

## Approvals

CE

|             |              |
|-------------|--------------|
| Certificate | CE-compliant |
|-------------|--------------|

ATEX

|                |                          |
|----------------|--------------------------|
| Identification | Ⓔ II 3 G Ex ec IIC T4 Gc |
| Certificate    | BVS 20 ATEX E 024 X      |

UKCA Ex (UKEX)

|                |                          |
|----------------|--------------------------|
| Identification | Ⓔ II 3 G Ex ec IIC T4 Gc |
| Certificate    | PxCIF21UKEX2902049X      |

# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## IECEEx

|                |                     |
|----------------|---------------------|
| Identification | Ex ec IIC T4 Gc     |
| Certificate    | IECEEx BVS 20.0017X |

## UL, USA/Canada

|                |                                       |
|----------------|---------------------------------------|
| Identification | UL 508 Listed                         |
|                | Class I, Div. 2, Groups A, B, C, D T5 |
|                | Class I, Zone 2, Group IIC T5         |

## Shipbuilding approval

|             |                   |
|-------------|-------------------|
| Certificate | DNV GL TAA00002UA |
|-------------|-------------------|

## EAC Ex

|                |                                 |
|----------------|---------------------------------|
| Identification | Ex ec IIC T4 Gc                 |
| Certificate    | BY/112 02.01 TP012 103.01 00079 |

## DNV GL data

|             |                                                                                         |
|-------------|-----------------------------------------------------------------------------------------|
| Temperature | B                                                                                       |
| Humidity    | B                                                                                       |
| Vibration   | A                                                                                       |
| EMC         | A                                                                                       |
| Enclosure   | Required protection according to the Rules shall be provided upon installation on board |

## EMC data

|                               |                                                                      |
|-------------------------------|----------------------------------------------------------------------|
| Noise immunity                | EN 61000-6-2                                                         |
| Note                          | When being exposed to interference, there may be minimal deviations. |
| Electromagnetic compatibility | Conformance with EMC directive                                       |
| Noise emission                | EN 61000-6-4                                                         |

## Electrostatic discharge

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
|-----------------------|--------------|

## Electrostatic discharge

|          |                                                                   |
|----------|-------------------------------------------------------------------|
| Comments | Safety measures must be taken to prevent electrostatic discharge. |
|----------|-------------------------------------------------------------------|

## Electromagnetic HF field

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Designation                                            | Electromagnetic RF field |
| Standards/regulations                                  | EN 61000-4-3             |
| Typical deviation from the measuring range final value | 0.2 %                    |

## Fast transients (burst)

|                                                        |                         |
|--------------------------------------------------------|-------------------------|
| Designation                                            | Fast transients (burst) |
| Standards/regulations                                  | EN 61000-4-4            |
| Typical deviation from the measuring range final value | 0.4 %                   |

## Surge current load (surge)

# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-5 |
|-----------------------|--------------|

## Conducted interference

|                                                        |                         |
|--------------------------------------------------------|-------------------------|
| Designation                                            | Conducted interferences |
| Standards/regulations                                  | EN 61000-4-6            |
| Typical deviation from the measuring range final value | 0.2 %                   |

## Standards and regulations

|                      |                 |
|----------------------|-----------------|
| Electrical isolation | 3-way isolation |
|----------------------|-----------------|

## Mounting

|                   |                                                                                                                       |
|-------------------|-----------------------------------------------------------------------------------------------------------------------|
| Mounting type     | DIN rail mounting                                                                                                     |
| Assembly note     | The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail. |
| Mounting position | any                                                                                                                   |


# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer

2902017

<https://www.phoenixcontact.com/us/products/2902017>

## Drawings

Block diagram

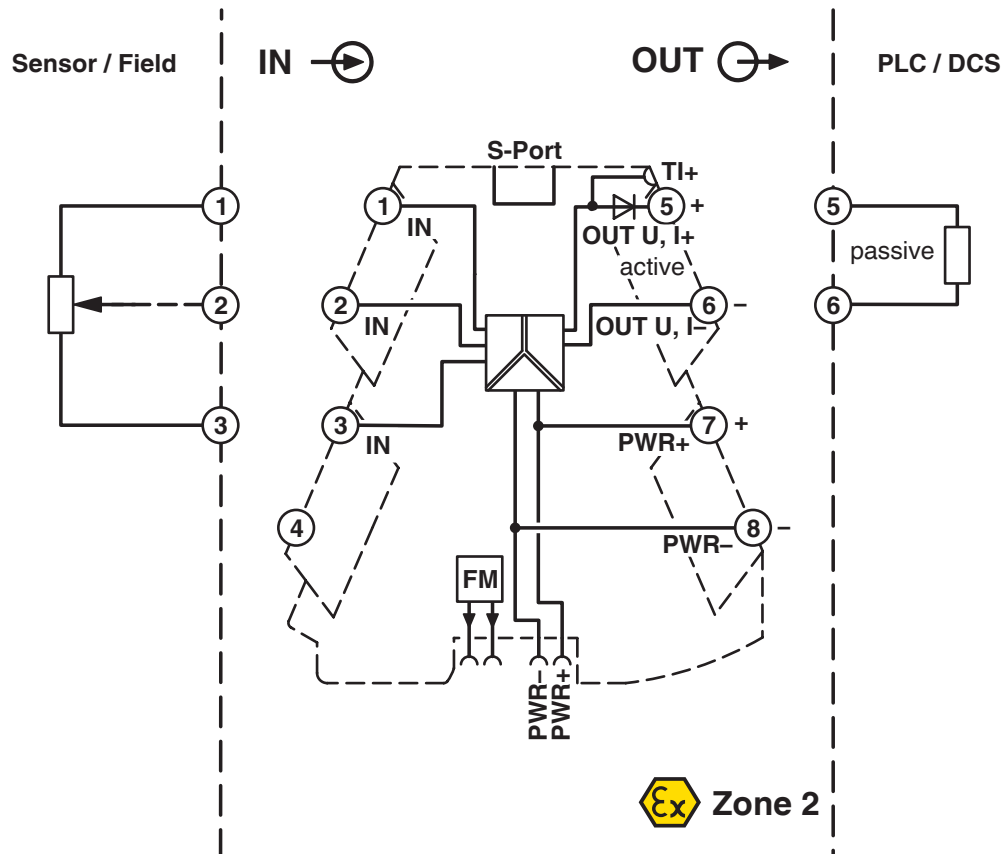

# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017  
<https://www.phoenixcontact.com/us/products/2902017>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2902017>

|                                                                                     |                                                 |
|-------------------------------------------------------------------------------------|-------------------------------------------------|
|    | <b>DNV GL</b><br>Approval ID: TAA00002UA        |
|    | <b>UL Listed</b><br>Approval ID: FILE E 238705  |
|    | <b>cUL Listed</b><br>Approval ID: FILE E 238705 |
|    | <b>IECEx</b><br>Approval ID: IECEx_BVS_20.0017X |
|  | <b>cUL Listed</b><br>Approval ID: FILE E 196811 |
|  | <b>UL Listed</b><br>Approval ID: FILE E 196811  |
|  | <b>ATEX</b><br>Approval ID: BVS 20 ATEX E 024 X |
|                                                                                     | <b>cULus Listed</b>                             |
|                                                                                     | <b>cULus Listed</b>                             |



# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017  
<https://www.phoenixcontact.com/us/products/2902017>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27210120 |
| ECLASS-12.0 | 27210120 |
| ECLASS-13.0 | 27210120 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002653 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121000 |
|-------------|----------|

# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## Environmental product compliance

### EU RoHS

|                                         |              |
|-----------------------------------------|--------------|
| Fulfills EU RoHS substance requirements | Yes          |
| Exemption                               | 7(a), 7(c)-I |

### China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-50                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | 73f6408a-026d-4d13-ba33-0024f42454a1 |

# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017


<https://www.phoenixcontact.com/us/products/2902017>

## Accessories

ME 6,2 TBUS-2 1,5/5-ST-3,81 GY - DIN rail bus connectors

2695439

<https://www.phoenixcontact.com/us/products/2695439>




DIN rail connector (TBUS), 5-pos., for bridging the supply voltage, can be snapped onto NS 35/... DIN rail in accordance with EN 60715

---

ME 6,2 TBUS-2 1,5/5-ST-3,81 GN - DIN rail bus connectors

2869728

<https://www.phoenixcontact.com/us/products/2869728>



DIN rail connector for DIN rail mounting. Universal for TBUS housing. Gold-plated contacts, 5-pos.

# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer




2902017

<https://www.phoenixcontact.com/us/products/2902017>

## TC-D37SUB-AIO16-MP-PS-UNI - Module carrier

2906640

<https://www.phoenixcontact.com/us/products/2906640>



Universal Termination Carrier for connecting 16 MINI Analog Pro signal conditioners to digital or analog I/O cards, via D-SUB connector, 37-pos. (1:1 connection), with HART multiplexer connection

---

## TC-D37SUB-ADIO16-MP-P-UNI - Module carrier

2906639

<https://www.phoenixcontact.com/us/products/2906639>



Universal Termination Carrier for connecting 16 MINI Analog Pro signal conditioners to digital or analog I/O cards, via D-SUB connector, 37-pos. (1:1 connection)

# MINI MCR-2-POT-UI-PT - Resistance/potipotition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## MINI MCR-2-V8-FLK 16 - System adapter

2901993

<https://www.phoenixcontact.com/us/products/2901993>



Eight MINI Analog Pro signal conditioners and measuring transducers can be connected to a controller with minimal cabling effort and without any errors using system adapters and system cabling.

---

## MINI MCR-2-V8-MOD-RTU - Communication module

2905634

<https://www.phoenixcontact.com/us/products/2905634>



Eight MINI Analog Pro signal conditioners and measuring transducers are quickly and easily integrated into a Modbus/RTU network via a communication adapter.

# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## MINI MCR-2-V8-MOD-TCP - Communication module

2905635

<https://www.phoenixcontact.com/us/products/2905635>



Eight MINI Analog Pro signal conditioners and measuring transducers are quickly and easily integrated into a Modbus/TCP network via a communication adapter.

---

## MINI MCR-2-V8-PB-DP - Communication module

2905636

<https://www.phoenixcontact.com/us/products/2905636>



Eight MINI Analog Pro signal conditioners and measuring transducers are quickly and easily integrated into a PROFIBUS DP network via a communication adapter.

# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## MINI MCR-2-V8-PN - Communication module

2905637

<https://www.phoenixcontact.com/us/products/2905637>



Eight MINI Analog Pro signal conditioners and measuring transducers can be quickly and easily integrated into a PROFINET network via a communication adapter.

---

## IFS-USB-PROG-ADAPTER - Programming adapter

2811271

<https://www.phoenixcontact.com/us/products/2811271>



Programming adapter with USB interface, for programming with software. The USB driver is included in the software solutions for the products to be programmed, such as measuring transducers or motor managers.

# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## IFS-BT-PROG-ADAPTER - Adapter

2905872

<https://www.phoenixcontact.com/us/products/2905872>



Bluetooth adapter with micro USB and S-PORT interface for wireless communication with the MINI Analog, MINI Analog Pro, MACX Analog, Interface System Gateways, and PLC logic device series.

---

## TWN4 MIFARE NFC USB ADAPTER - Programming adapter

2909681

<https://www.phoenixcontact.com/us/products/2909681>



Near Field Communication (NFC) programming adapter with USB interface for the wireless configuration of NFC-capable products from Phoenix Contact with software. A separate USB driver is not required.



# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## FASTCON PRO-SET - Connector set

2906227

<https://www.phoenixcontact.com/us/products/2906227>



FASTCON Pro plug set consisting of four plugs with screw connection, one for each position on the module. Suitable for all MINI Analog Pro modules.

---

## FASTCON PRO-SET-PT - Connector set

2906228

<https://www.phoenixcontact.com/us/products/2906228>



FASTCON Pro plug set consisting of four plugs with push-in connection, one for each position on the module. Suitable for all MINI Analog Pro modules.

# MINI MCR-2-POT-UI-PT - Resistance/potipotition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## UCT-EM (30X5) - Marker for end clamp

0801505

<https://www.phoenixcontact.com/us/products/0801505>



Marker for end clamp, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, lettering field size: 30 x 5 mm, Number of individual labels: 24

---

## UCT-EM (30X5) CUS - Marker for end clamp

0801589

<https://www.phoenixcontact.com/us/products/0801589>



Marker for end clamp, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snapped into marker carrier, lettering field size: 30 x 5 mm, Number of individual labels: 24

# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## SK 5,0 WH:REEL - Marker strip

0805221

<https://www.phoenixcontact.com/us/products/0805221>



Marker strip, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: adhesive, lettering field size: continuous x 5 mm, Number of individual labels: 10

---

## UC-EMLP (15X5) - Plastic label

0819301

<https://www.phoenixcontact.com/us/products/0819301>



Plastic label, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: adhesive, lettering field size: 15 x 5 mm, Number of individual labels: 10

# MINI MCR-2-POT-UI-PT - Resistance/potipotition transducer




2902017

<https://www.phoenixcontact.com/us/products/2902017>

## UC-EMLP (15X5) YE - Plastic label

0822615

<https://www.phoenixcontact.com/us/products/0822615>



Plastic label, Sheet, yellow, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: adhesive, lettering field size: 15 x 5 mm, Number of individual labels: 10

---

## UC-EMLP (15X5) CUS - Plastic label

0824550

<https://www.phoenixcontact.com/us/products/0824550>



Plastic label, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: adhesive, lettering field size: 15 x 5 mm

# MINI MCR-2-POT-UI-PT - Resistance/potipotposition transducer



2902017


<https://www.phoenixcontact.com/us/products/2902017>

## UC-EMLP (15X5) YE CUS - Plastic label

0824551

<https://www.phoenixcontact.com/us/products/0824551>

Plastic label, can be ordered: by sheet, yellow, labeled according to customer specifications, mounting type: adhesive, lettering field size: 15 x 5 mm



---

## UC-EMLP (15X5) SR - Plastic label

0828095

<https://www.phoenixcontact.com/us/products/0828095>

Plastic label, Sheet, silver, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: adhesive, lettering field size: 15 x 5 mm, Number of individual labels: 10



# MINI MCR-2-POT-UI-PT - Resistance/potipotposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## UC-EMLP (15X5) SR CUS - Plastic label

0828099

<https://www.phoenixcontact.com/us/products/0828099>

Plastic label, can be ordered: by sheet, silver, labeled according to customer specifications, mounting type: adhesive, lettering field size: 15 x 5 mm, Number of individual labels: 10



---

## US-EMLP (15X5) - Plastic label

0828790

<https://www.phoenixcontact.com/us/products/0828790>

Plastic label, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: adhesive, lettering field size: 15 x 5 mm, Number of individual labels: 189



# MINI MCR-2-POT-UI-PT - Resistance/potipotition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## US-EMLP (15X5) YE - Plastic label

0828873

<https://www.phoenixcontact.com/us/products/0828873>



Plastic label, Card, yellow, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: adhesive, lettering field size: 15 x 5 mm, Number of individual labels: 189

---

## US-EMLP (15X5) SR - Plastic label

0828874

<https://www.phoenixcontact.com/us/products/0828874>



Plastic label, Card, silver, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: adhesive, lettering field size: 15 x 5 mm, Number of individual labels: 189

# MINI MCR-2-POT-UI-PT - Resistance/potipotition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## US-EMLP (15X5) CUS - Plastic label

0830076

<https://www.phoenixcontact.com/us/products/0830076>

Plastic label, can be ordered: by card, white, labeled according to customer specifications, mounting type: adhesive, lettering field size: 15 x 5 mm, Number of individual labels: 189



---

## US-EMLP (15X5) YE CUS - Plastic label

0830077

<https://www.phoenixcontact.com/us/products/0830077>

Plastic label, can be ordered: by card, yellow, labeled according to customer specifications, mounting type: adhesive, lettering field size: 15 x 5 mm, Number of individual labels: 189





# MINI MCR-2-POT-UI-PT - Resistance/potipotiposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## US-EMLP (15X5) SR CUS - Plastic label

0830078

<https://www.phoenixcontact.com/us/products/0830078>

Plastic label, can be ordered: by card, silver, labeled according to customer specifications, mounting type: adhesive, lettering field size: 15 x 5 mm, Number of individual labels: 189



---

## UCT-EM (30X5) YE - Marker for end clamp

0830340

<https://www.phoenixcontact.com/us/products/0830340>

Marker for end clamp, Sheet, yellow, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, lettering field size: 30 x 5 mm, Number of individual labels: 24



# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## UCT-EM (30X5) YE CUS - Marker for end clamp

0830348

<https://www.phoenixcontact.com/us/products/0830348>

Marker for end clamp, can be ordered: by sheet, yellow, labeled according to customer specifications, mounting type: snapped into marker carrier, lettering field size: 30 x 5 mm, Number of individual labels: 24



---

## MINI MCR-2-PTB - Power terminal block

2902066

<https://www.phoenixcontact.com/us/products/2902066>

Power terminal with plug-in connection technology for delivering the supply voltage to the DIN rail connector. Monitoring of the supply voltages in combination with the fault monitoring module. Screw connection technology



# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## MINI MCR-2-PTB-PT - Power terminal block

2902067

<https://www.phoenixcontact.com/us/products/2902067>



Power terminal with plug-in connection technology for delivering the supply voltage to the DIN rail connector. Monitoring of the supply voltages in combination with the fault monitoring module. Push-in connection technology

---

## QUINT4-SYS-PS/1AC/24DC/2.5/SC - Power supply unit

2904614

<https://www.phoenixcontact.com/us/products/2904614>



Primary-switched power supply, QUINT POWER, screw connection, DIN rail mounting, supply of devices possible via the TBUS DIN rail connector, protective coating, input: single-phase, output: 24 V DC/2.5 A

# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## MINI MCR-2-FM-RC - Monitoring block

2904504

<https://www.phoenixcontact.com/us/products/2904504>



Fault monitoring module with plug-in connection technology for evaluating and reporting group errors from the FM system and for monitoring the supply voltages. Error message via N/C contact. Screw connection technology, standard configuration

---

## MINI MCR-2-FM-RC-PT - Monitoring block

2904508

<https://www.phoenixcontact.com/us/products/2904508>



Fault monitoring module with plug-in connection technology for evaluating and reporting group errors from the FM system and for monitoring the supply voltages. Error message via N/C contact. Push-in connection technology, standard configuration

# MINI MCR-2-POT-UI-PT - Resistance/potiposition transducer



2902017

<https://www.phoenixcontact.com/us/products/2902017>

## SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)