


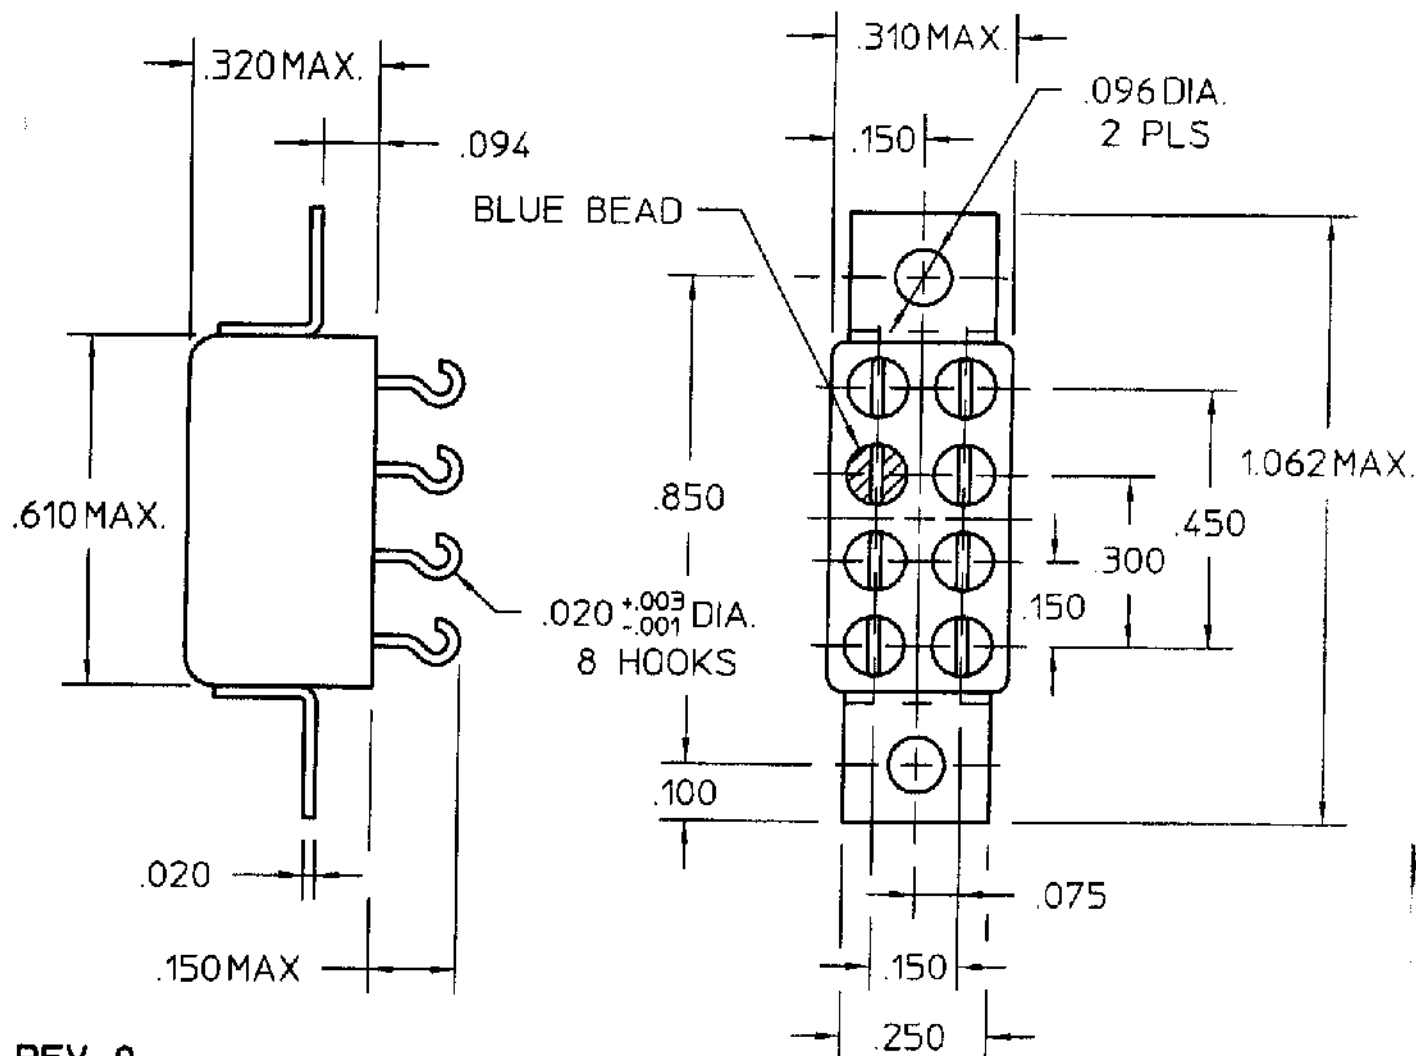

REV. 0

DCO 142582

TOL $\pm .010$ UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C

RESISTANCE 210 OHMS $\pm 10\%$

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 5.4 VDC

MUST RELEASE 3.2 VDC MAX, 0.6 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's


SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.

CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

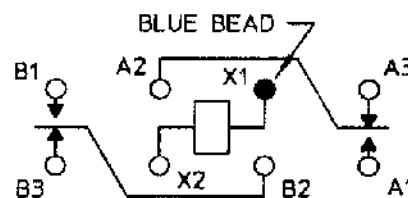

TERMINAL VIEW

CONTACT RATING:

DR. PBB 1/3/01

CK. 1/3/01

CII Technologies
advanced control electronic solutions

CUST. QPL

CUST. NO. M39016/13-065P REV.

'3SBC' RELAY

3SBC2010A2