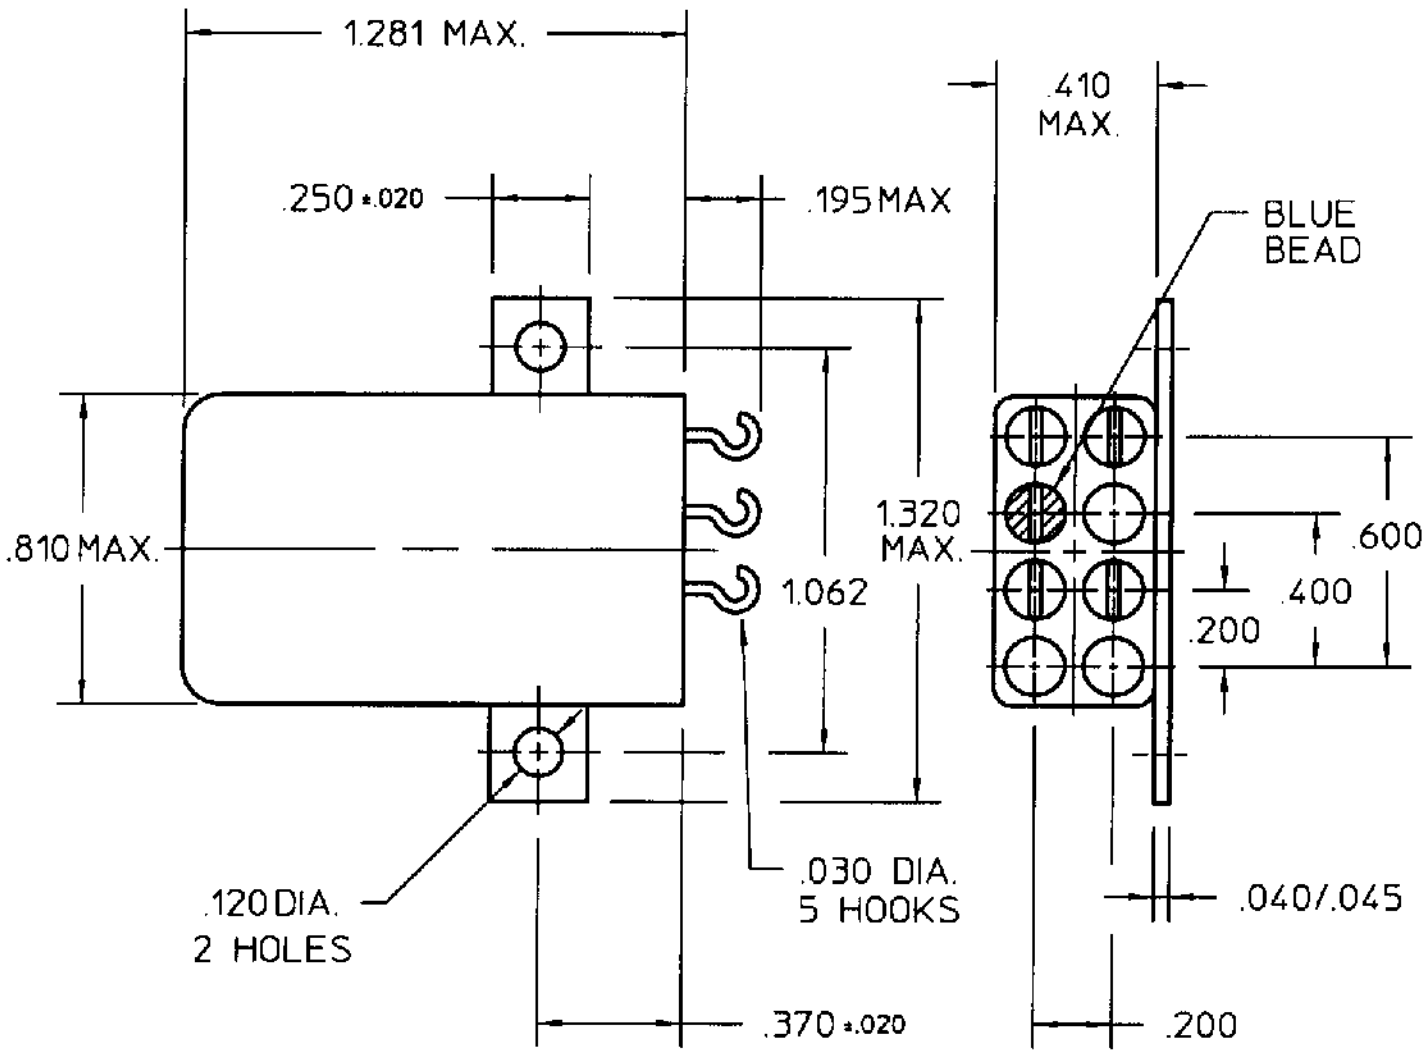

REV. 1 9/5/97

COIL: @ 25°C

RESISTANCE	30 OHMS ± 10%
NOMINAL VOLTAGE	1.8 VDC
MUST OPERATE	30.0 mADC
MUST RELEASE	2.9 mADC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 15 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX.
RELEASE 10 MS MAX.
BOUNCE 3 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 2 AMPS 30 VDC & 1 AMP 115 VAC 400 HZ RESISTIVE 100,000 OPERATIONS

DR. R.B. 8/21/97 CK

COMMUNICATIONS INSTRUMENTS, INC.

CUST. HI-G
CUST. NO. 1BC-1B-102

TYPE "SF" RELAY

SF5037S02