


# Lion

## PC/104 Format Single Board Computer

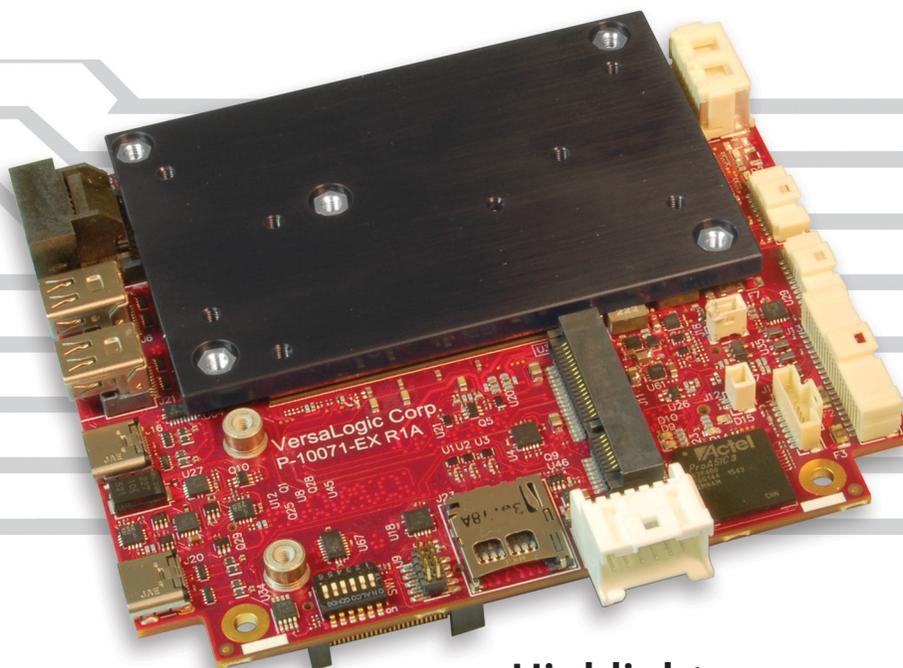

### Overview

The Lion is a high-performance single board computer (SBC) which combines Intel's 7th generation Core "Kaby Lake" processor, with a newer PCIe/104 OneBank expansion interface. Compatible with the PCI/104-Express format, it includes a legacy PCI connector, and a high-speed PCIe connector. This provides flexible system expansion, while leaving more on-board space available for product features. The single bank connector is mechanically and electrically compatible with PCI/104-Express Type 1 and Type 2 modules. In addition, the Lion also contains a full complement of on-board I/O interfaces, including USB 3.0, USB 2.0, mini PCIe expansion socket, TPM chip, multiple serial interfaces, and 8-bits of digital I/O.

The Lion is available with an embedded i7-7600U, i5-7300U, or i3-7100U Kaby Lake processor, providing standard clock rates up to 2.8 GHz and Turbo Boost rates to 3.9 GHz. The Kaby Lake processors feature dual-core CPUs and Hyper-Threading logic allowing up to 4 simultaneous threads to be executed.

As with all VersaLogic products, the Lion is designed to support OEM applications where high reliability and long-term availability are required. Lion is backed by a five-year warranty, 5+ year off-the-shelf availability guarantee, and expert US-based technical support. From application design-in support, to its 10+ year extended life programs, the Lion provides a durable embedded computer solution with an excellent cost of ownership.


### Highlights

- 7th Generation Intel® Core™ processor ("Kaby Lake") Dual-core
- PCI/104 OneBank™ form factor
- TPM (Trusted Platform Module) security chip
- Intel Active Management Technology
- -40° to +85°C Operating Temperature
- Up to 16 GB RAM
- Dual Gigabit Ethernet
- DisplayPort video outputs
- Mini PCIe Socket, with mSATA support
- USB 3.0 and 2.0 ports
- Serial I/O (RS-232/422/485)
- Digital I/O
- Shock & vibration per MIL-STD-202G
- VersaAPI software support
- x86 operating systems (Windows, Linux, etc.)

# Features

- 1 Intel “Kaby Lake” Processor**  
Up to 2.8 GHz clock rate, dual-core.
- 2 Trusted Platform Module**  
*(not shown; on back side)*  
On-board TPM security chip can lock out unauthorized hardware and software access.
- 3 High-performance Video**  
Integrated Intel HD Graphics 620 core supports DirectX 12, OpenGL 4.4, and H.264, MPEG-2 encoding/decoding. Dual Mini DisplayPort outputs (DP++). DisplayPort supports HD audio output.
- 4 Network**  
Dual Gigabit Ethernet (GbE) with remote boot support.
- 5 SATA**  
6 Gb/s SATA port. Supports rotating or solid state SATA drives.
- 6 Mini PCIe Card Sockets**  
Supports Wi-Fi modems, GPS receivers, flash data storage with auto-detect mSATA flash storage support, and other mini PCIe modules.
- 7 MicroSD Socket**  
Supports removable microSD card solid-state drives.
- 8 Industrial I/O**
  - (a) Two USB 3.0 and four USB 2.0 ports support keyboard, mouse, and other devices.
  - (b) Dual RS-232/422/485 and Dual RS-232 ports, three 8254 timer/counters, and I2C support.
- 9 Digital I/O**  
Eight 3.3V digital I/O lines.
- 10 SPI Interface**  
Supports SPI and SPX devices, including low cost analog and digital modules.
- 11 Power Input**  
5V Input
- 12 Stackable Expansion** *(on back side)*  
High speed stack-down PCIe/104 OneBank connector. Legacy stack-down PCI connector.

- Fanless Operation**  
No moving parts required for CPU cooling in most configurations.
- Memory** *(on back side)*  
Up to 16 GB DDR3L memory.
- Industrial Temperature Operation**  
-40° to +85°C operation for harsh environments.
- MIL-STD-202G**  
Qualified for high shock/vibration environments.
- Software Support**  
Compatible with a variety of popular x86 operating systems including Windows, Windows Embedded, Linux, and VxWorks..

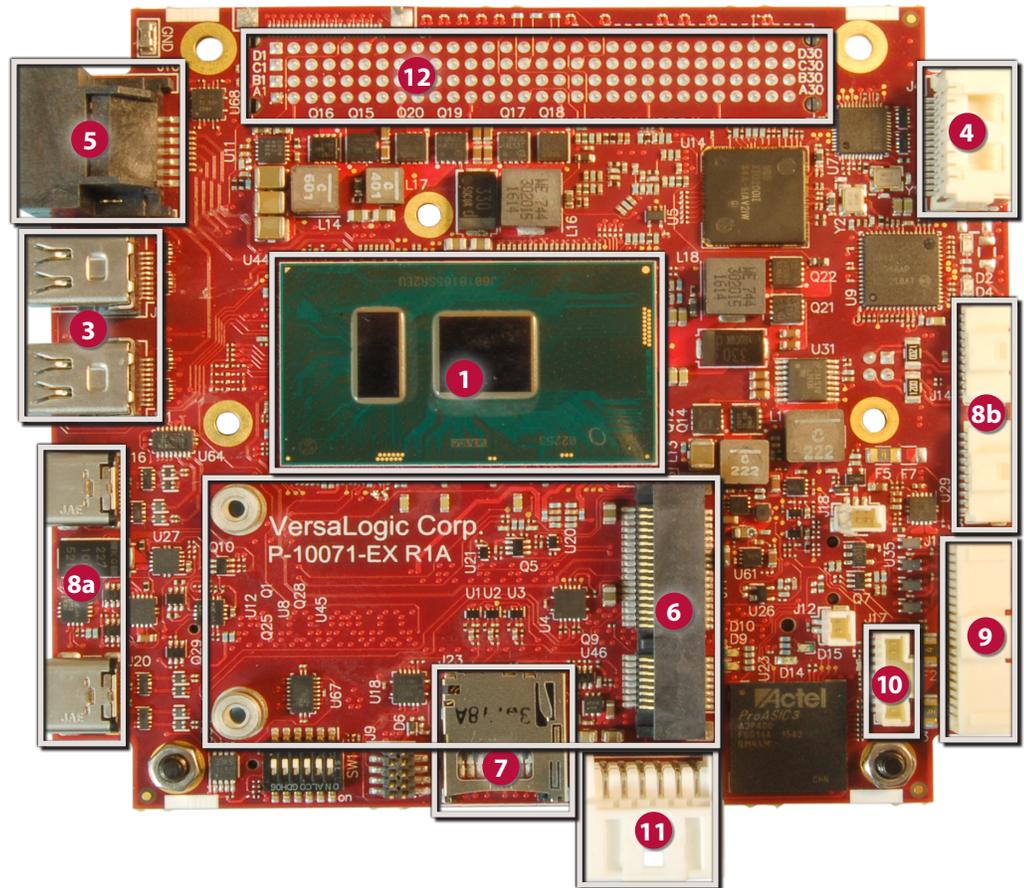

## Modify Lion to Your Exact Requirements

COT's modifications are available in quantities as low as 100 pieces.

- Conformal Coating
- Custom Labeling
- Custom Screening
- Custom Cabling
- BGA Underfill
- Application-Specific Testing
- Connector & I/O Changes
- BIOS Modifications
- Software and Drivers
- And more –
- Custom Testing
- Revision Locks

### Specifications

<b>General</b>				
<b>Board Size</b>	PC/104 Compliant: 108 x 96 mm (4.23 x 3.77")			
<b>Weight</b>	175 grams (6.2 oz.)			
<b>Processor</b>	Intel 7th Generation Core i3-7100U, i5-7300U, or i7-7600U dual core. L2 cache. Supports enhanced Intel SpeedStep, Intel 64-bit instructions, Hyper-Threading, AES Instructions, Execute Disable Bit, and Virtualization Technology.			
<b>Input Voltage</b>	5.15V +/- 2%			
<b>Battery</b>	Connector for external 3.0V RTC backup battery.			
<b>Power Requirements §</b>	<i>Model</i>	<i>Idle</i>	<i>Typical</i>	<i>Max.</i>
	VL-EPMe-42xAP-00	3.6W	12.0W	20.4W
	VL-EPMe-42xAP-04	3.6W	12.0W	20.4W
	VL-EPMe-42xBP-00	4.0W	12.5W	20.9W
	VL-EPMe-42xBP-04	4.0W	12.5W	20.9W
	VL-EPMe-42xCP-00	4.1W	12.5W	21.9W
	VL-EPMe-42xCP-04	4.1W	12.5W	21.9W
	VL-EPMe-42xCP-08	4.1W	13.3W	22.4W
	VL-EPMe-42xCP-16	4.1W	13.5W	22.9W
<b>System Reset &amp; Hardware Monitors</b>	All voltage rails monitored. Watchdog timer with programmable timeout. CPU temperature and fan speed monitoring. Push-button reset and power.			
<b>Stackable Bus</b>	PCI/104-Express OneBank format including: Legacy PCI connector and high speed OneBank connector (supports two PCIe x1 lanes).			
<b>Manufacturing Standards</b>	Standard	IPC-A-610 Class 2 modified		
	Special Order	IPC-A-610 Class 3 modified		
<b>Regulatory Compliance</b>	RoHS (EU 2015/863)			

<b>Environmental</b>				
<b>Cooling Options</b>	Bolt-on heat plate standard. Optional Heat sink, Heat sink with fan, heat pipe, and other adaptors available.			
<b>Operating Temperature ◇</b>	<i>Model</i>	<i>Heat Plate**</i>	<i>Heat Sink</i>	<i>Heat Sink + Fan</i>
	VL-EPMe-42E	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
	VL-EPMe-42S	0° to +60°C	0° to +60°C	0° to +60°C
	Ranges shown assume 90% CPU utilization. For detailed thermal information and exceptions, refer to the VL-EPMe-42 Reference Manual. **Heat plate must be kept below 90°C			
<b>Airflow Requirements</b>	Refer to the VL-EPMe-42 Reference Manual for detailed airflow requirements.			
<b>Storage Temperature</b>	-40° to +85°C			
<b>Altitude</b>	Operating*	To 4,570m (15,000 ft.)		
	Storage	To 12,000m (40,000 ft.)		
<b>Thermal Shock</b>	5°C/min. over operating temperature			
<b>Humidity</b>	Less than 95%, noncondensing			
<b>Vibration, Sinusoidal Sweep □</b>	MIL-STD-202G, Method 204, Modified Condition A: 2g constant acceleration from 5 to 500 Hz, 20 min. per axis			
<b>Vibration, Random □</b>	MIL-STD-202G, Method 214A, Condition A: 5.35g rms, 5 min. per axis			

§ Represents operation at +25°C and +5V running Windows 7 with on-board, DisplayPort display, SATA, Ethernet, COM, and USB keyboard/mouse. Typical power computed as the mean value of Idle and Maximum power specifications. Maximum power measured with 95% CPU utilization.

‡ TVS protected port (enhanced ESD protection)

# Power pins are overload protected

◇ Derate -1.1°C per 305m (1,000 ft.) above 2,300m (7,500 ft.)

\* For extended altitude information contact VersaLogic Sales

□ MIL-STD-202G shock and vibrate levels were used to illustrate the overall ruggedness of this product. Certification at higher levels or different types of shock or vibration methods per the specific requirements of the application is available. Contact VersaLogic Sales for further information.

Δ RS232 through CPU HSUART ports and Operating System (Windows WINSSD, Linux Minicom compatible). Some applications may require customer developed drivers.

<b>Mechanical Shock □</b>	MIL-STD-202G, Method 213B, Condition G: 20g half-sine, 11 ms duration per axis
<b>Security</b>	
<b>TPM</b>	Trusted Platform Module 2.0 device.

<b>Memory</b>	
<b>System RAM</b>	Up to 16 GB DDR3L (1.35V) SDRAM.
<b>Memory Speed</b>	1600 MHz

<b>Video</b>	
<b>General</b>	Integrated high-performance video. Intel HD 620 - Gen-9 compute architecture, 24 execution units, and GPU Turbo Boost. Supports 3 independent displays. Supports DirectX 12, OpenGL 4.4, OpenCL 2.0.
<b>Hardware Based Acceleration</b>	Decode and Encode of JPEG, MJPEG, MPEG2, AVC, MVC, HEVC 8-bit, VC-1, VP8, VP9.
<b>DisplayPort Interface §</b>	Dual Mini DisplayPort outputs supports DP++ and HDMI signaling (Video and Audio outputs). 24-bit. Up to 4096 x 2304 at 60 Hz. Supports Extended Desktop, Clone, and Twin display modes.

<b>Mass Storage</b>	
<b>Rotating or Solid-State Drives</b>	SATA (Revision 3.0) port. (optional dual SATA available)
<b>Flash storage</b>	mSATA modules (SATA signaling, bootable).
<b>Flash storage</b>	One microSD socket. Bootable

<b>Network Interface</b>	
<b>Ethernet ‡</b>	Two autotetect 10BaseT/100BaseTX/1000BaseT ports with status LEDs. IEEE 1588 Precision Time Protocol (PTP) compatible.
<b>Network Boot Option</b>	Via BIOS extension
<b>Remote Management</b>	Intel vPro Active Management Technology (AMT) (i5-7300U and i7-7600U CPUs only). Supports out-of-band management capabilities including Keyboard-Video-Mouse (KVM) Remote Control, alerting, and event logging.

<b>Device I/O</b>	
<b>USB # ‡</b>	Two USB 3.0 host port (Type-C connectors) and four USB 2.0 host ports.
<b>COM 1 / 2 Interface ‡</b>	Two RS-232/422/485 selectable ports. 16C550 compatible. 460 Kbps.
<b>COM 3 / 4 Interface ‡Δ</b>	Two RS-232 ports. 115 Kbps.
<b>Digital I/O</b>	Eight TTL I/O lines (3.3V). Independently configurable.
<b>I2C</b>	Single I2C interface
<b>Audio</b>	Optional. Use VL-ADR-01 audio interface or DisplayPort HD audio output.
<b>Counter/Timers</b>	Three 8254 compatible Programmable Interval Timers (PITs).

<b>Other I/O</b>	
<b>Mini PCIe / mSATA Socket</b>	Full-size Mini PCIe socket with mSATA signaling support. Supports Wi-Fi modems, GPS receivers, solid state mSATA drives, and other plug-in modules.
<b>SPI Interface</b>	Supports SPI and SPX devices. Supports up to two SPX modules.

<b>Software</b>	
<b>BIOS</b>	Phoenix Technologies UEFI BIOS. Field reprogrammable. Support for USB keyboard/mouse and USB boot.
<b>VersaAPI</b>	VersaLogic Application Programming Interface to support on-board I/O devices.
<b>Sleep Mode</b>	ACPI 5.0. Support for S3 and S4 suspend states and C3 processor state.
<b>Operating Systems</b>	Compatible with most x86 operating systems including Windows, Windows Embedded, Linux, VxWorks, and QNX.

Specifications are subject to change without notification. Intel and Core are trademarks of Intel Corp. PC/104, PCI/104-Express and PCIe/104 OneBank are trademarks of the PC/104 Consortium. PCI Express is a registered trademark of PCI-SIG. SATA and mSATA are trademarks of the Serial ATA International Organization. All other trademarks are the property of their respective owners.

## Ordering Information

Other configurations are possible. Contact VersaLogic Sales at (503) 747-2261 to discuss requirements!

Model	Processor	Cores	Memory Size GB	Clock Frequency (Normal / Turbo)	Graphics Frequency (Normal / Boost)	vPro Capabilities	Operating Temp.	Cooling
VL-EPMe-42EAP-00	i3-7100U	Dual	0	2.4 GHz / none	300 MHz / 1.00 GHz	No	-40° to +85°C	Heat Plate
VL-EPMe-42EAP-04	i3-7100U	Dual	4	2.4 GHz / none	300 MHz / 1.00 GHz	No	-40° to +85°C	Heat Plate
VL-EPMe-42EBP-00	i5-7300U	Dual	0	2.6 GHz / 3.5 GHz	300 MHz / 1.10 GHz	Yes	-40° to +85°C	Heat Plate
VL-EPMe-42EBP-04	i5-7300U	Dual	4	2.6 GHz / 3.5 GHz	300 MHz / 1.10 GHz	Yes	-40° to +85°C	Heat Plate
VL-EPMe-42ECP-00	i7-7600U	Dual	0	2.8 GHz / 3.9 GHz	300 MHz / 1.15 GHz	Yes	-40° to +85°C	Heat Plate
VL-EPMe-42ECP-04	i7-7600U	Dual	4	2.8 GHz / 3.9 GHz	300 MHz / 1.15 GHz	Yes	-40° to +85°C	Heat Plate
VL-EPMe-42ECP-08	i7-7600U	Dual	8	2.8 GHz / 3.9 GHz	300 MHz / 1.15 GHz	Yes	-40° to +85°C	Heat Plate
VL-EPMe-42ECP-16	i7-7600U	Dual	16	2.8 GHz / 3.9 GHz	300 MHz / 1.15 GHz	Yes	-40° to +85°C	Heat Plate
VL-EPMe-42SAP-00	i3-7100U	Dual	0	2.4 GHz / none	300 MHz / 1.00 GHz	No	0° to +60°C	Heat Plate
VL-EPMe-42SAP-04	i3-7100U	Dual	4	2.4 GHz / none	300 MHz / 1.00 GHz	No	0° to +60°C	Heat Plate
VL-EPMe-42SBP-00	i5-7300U	Dual	0	2.6 GHz / 3.5 GHz	300 MHz / 1.10 GHz	Yes	0° to +60°C	Heat Plate
VL-EPMe-42SBP-04	i5-7300U	Dual	4	2.6 GHz / 3.5 GHz	300 MHz / 1.10 GHz	Yes	0° to +60°C	Heat Plate
VL-EPMe-42SCP-00	i7-7600U	Dual	0	2.8 GHz / 3.9 GHz	300 MHz / 1.15 GHz	Yes	0° to +60°C	Heat Plate
VL-EPMe-42SCP-08	i7-7600U	Dual	8	2.8 GHz / 3.9 GHz	300 MHz / 1.15 GHz	Yes	0° to +60°C	Heat Plate

## Accessories

Part Number	Description
<b>Cable Kit</b>	
VL-CKR-LION	Development Cable kit for EPMe-42. Includes: VL-4005, 0702, 1014, 1205, 1604, 2402, 2032, HDW-401, and 105.
VL-CBR-4005	I/O Cable Assembly, Cable & Paddle Board
VL-CBR-0702	SATA cable latching, 20"
VL-CBR-1014	1 mm 10-pin Pico-Clasp to two DB-9 Cable, 12"
VL-CBR-1205	12-pin Micro-clasp to ATX 5V power adapter cable 7"
VL-CBR-1604	Dual Ethernet cable – rugged latching, 12"
VL-CBR-2402	USB 3.0 Type-C plug to Type-A socket cable
VL-CBR-2032	miniDisplayPort to 15-pin VGA adapter 6" (Commercial Temperature)
VL-HDW-105	Standoff package (metric thread) 0.6"
VL-HDW-401	Thermal compound paste. For attaching heat plates and sinks
<b>Thermal Options</b>	
VL-HDW-406	Passive Heat Sink to mount on product heat plate.
VL-HDW-413	Heat Sink + Cooling fan assembly to mount on product heat plate.
VL-HDW-408	Heat Pipe system to mount on product heat plate.
<b>Cables</b>	
VL-CBR-0203	2-pin Latching Battery Module, 6"
VL-CBR-0901	9-pin Pico-Clasp to Dual SPX cable, 8"
VL-CBR-2031	miniDisplayPort to miniDisplayPort, 36"
VL-CBR-2033	miniDisplayPort to HDMI Active Adapter, 6" (Commercial Temperature)
<b>Memory</b>	
VL-MM9-xxEBN	DDR3 PC3-12800 SO-DIMM memory module (1.35v) (Industrial Temperature)
VL-MM9-xxSBN	DDR3 PC3-12800 SO-DIMM memory module (1.35v) (Commercial Temperature)
<b>Audio</b>	
VL-ADR-01S	USB to Audio Adapter
<b>Solid-State Storage (flash memory)</b>	
VL-F41-xxxx	microSD card (SDIO), SLC, (Industrial Temperature)
<b>Hardware</b>	
VL-PS-ATX12-300A	Bench-top / development power supply
VL-HDW-106	0.6" standoffs, English thread (four per kit)
VL-HDW-108	Mini PCIe / mSATA hardware kit (metric thread) 2.5 mm
VL-HDW-114	PC104 (PCIe) Spacer
VL-HDW-115	PC104 (blank) Spacer
<b>Miscellaneous</b>	
VL-HDW-111	Half to Full Size Mini PCIe Adapter kit. Metal adapter and screws (2)
VL-HDW-203	PC/104 extractor tool (metal)

## Expansion Modules

Part Number	Description	Form Factor
<b>Network</b>		
VL-MPEe-E4E	Gigabit Ethernet over Fiber adapter	Mini PCIe
VL-MPEe-E3E	Gigabit Ethernet adapter	Mini PCIe
VL-MPEe-FW1E	1394 Firewire Module, (Industrial Temperature)	Mini PCIe
<b>Serial I/O</b>		
VL-MPEe-U2E	Quad serial plus twelve GPIOs	Mini PCIe
<b>Analog &amp; Digital I/O</b>		
VL-MPEe-A1E	Analog input (12-bit resolution)	Mini PCIe
VL-MPEe-A2E	Analog input (16-bit resolution)	Mini PCIe
VL-SPX-1	Analog Input Module 8-Channels	SPX
VL-SPX-2	Digital I/O Module 16-lines	SPX
VL-SPX-4	Analog Output Module 4-channels 12-bit	SPX
VL-SPX-5	Solid State Switch Module 8-channel	SPX
<b>GPS</b>		
VL-MPEu-G2E	GPS receiver	Mini PCIe
VL-MPEu-G3E	Advanced GPS receiver	Mini PCIe
<b>Video</b>		
VL-EPMp-V7E	Video Expansion Module: VGA and LVDS	PCI-104
VL-MPEe-V5E	VGA and LVDS Interface	Mini PCIe
<b>Solid-State Storage (flash memory)</b>		
VL-MPEs-F1Exx	mSATA module (4/16/32 GB) (SATA)	Mini PCIe
<b>Adapters</b>		
VL-MPEs-S3E	SATA adapter	Mini PCIe
VL-EPMp-P2E	PCI-104 Mini PCIe socket x2 Adapter	PCI-104

### Take the Risk out of Embedded Computing

Whether it's selecting the optimum solution for your application, providing expert support during development, or on-time delivery of defect-free products, VersaLogic is here to make sure your project goes smoothly from initial concept through the extended life of your program. Contact VersaLogic today to learn more.

